

APN: 10726549
 Material: CUFE2P
 Surface: SN
 Material Thickness: 0.30 mm
 Cross Section [mm²]: 1.50 | 2.00 | 2.50

FRAMATOME 211CC3S2160

Strip Length: 4.50 mm
 Cable Type: DT3LH

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 2.20-3.00
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
DT3LH 1.50		37x0.23	2.30	200	1.55	+ 0.05 - 0.05	2.55	+ 0.10 - 0.10	2.80	+ 0.10 - 0.10	3.60	+ 0.10 - 0.10
DT3LH 2.00		56x0.22	2.60	230	1.65	+ 0.05 - 0.05	2.60	+ 0.10 - 0.10	3.00	+ 0.10 - 0.10	3.70	+ 0.10 - 0.10
DT3LH 2.50		50x0.26	2.85	250	1.75	+ 0.05 - 0.05	2.60	+ 0.10 - 0.10	3.20	+ 0.10 - 0.10	3.75	+ 0.10 - 0.10


Core:
 C-2.50-3.5-19
 APN 10713724

Isolation:
 IO-3.50-2.5-12
 APN 10713871

Anvil:

Two piece anvil:
 AC-2.50-3.75-A
 APN 10764010
 AI-3.50-3.2-0.6
 APN 10803469

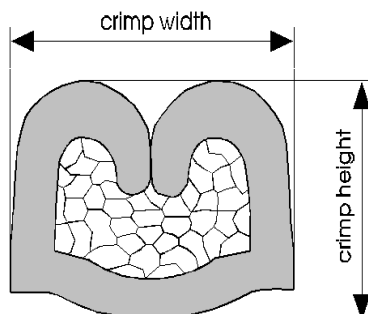


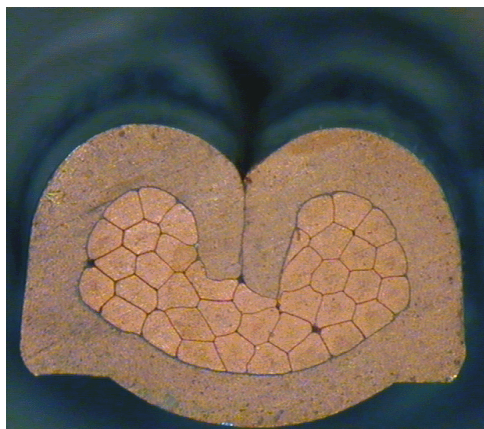

Cable:
DT3LH 1.50mm² = 37x0.23 mm

Crimp height:
1.55 mm


Crimp width:
2.55 mm

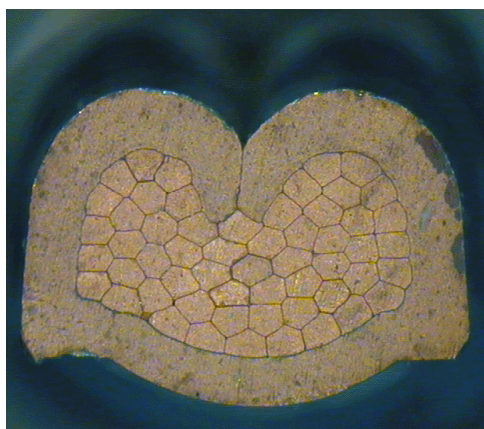

Cable:
DT3LH 2.00mm² = 56x0.22 mm

Crimp height:
1.65 mm

Crimp width:
2.60 mm

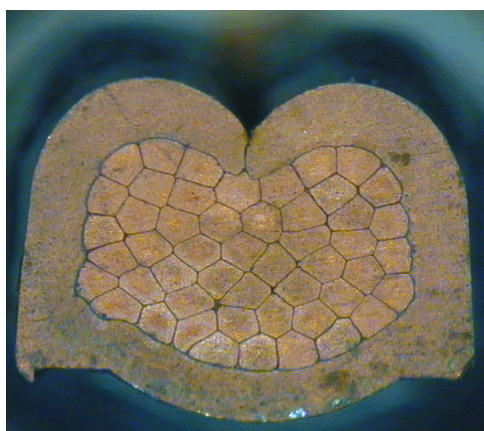

Cable:
DT3LH 2.50mm² = 50x0.26 mm

Crimp height:
1.75 mm

Crimp width:
2.60 mm