

Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,00 - 3,25
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00		3,13	250	1,95	0,05	3,70	0,10	3,90	0,10	4,30	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

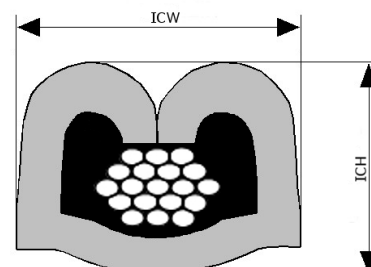

Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 3,00 | 5,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,45 - 4,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00		3,63	250	1,95	0,05	3,70	0,10	4,20	0,10	4,30	0,10
1007 5,00		4,45	300	2,25	0,05	3,65	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 5,00

*This document is non-contractual
 and for information only.*

*For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 4,20 - 4,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 5,00		4,45	300	2,25	0,05	3,65	0,10	4,50	0,10	4,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

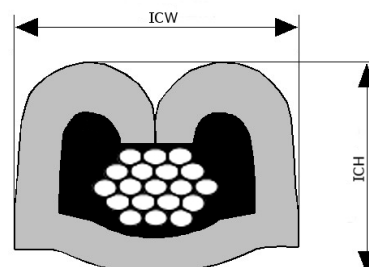

Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 2,50 | 3,00 | 4,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,60 - 3,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 2,50		2,80	210	1,75	0,05	3,60	0,10	3,90	0,10	4,30	0,10
2010 3,00		3,10	240	1,85	0,05	3,60	0,10	4,10	0,10	4,40	0,10
2010 4,00		3,45	230	2,20	0,05	3,65	0,10	3,80	0,10	4,20	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

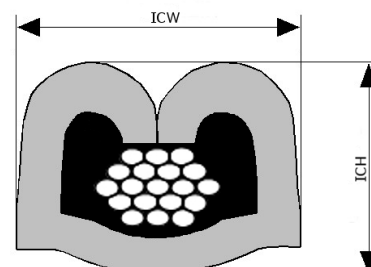

Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 6,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Insulation Range Φ [mm]: 3,80 - 4,30
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 6,00		4,05	320	2,50	0,05	3,90	0,10	4,40	0,10	4,40	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

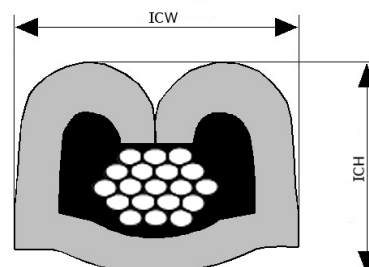

Crimp Information Sheet

Terminal Part Number: 10762802
 Surface Plating: SN
 Material Thickness [mm]: 0,34
 Cross Section [mm²]: 4,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 4,00 - 4,50
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 4,00		4,25	265	2,20	0,05	3,70	0,10	4,25	0,10	4,40	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

