

Crimp Information Sheet

DELPHI

Terminal Part Number: 10863886

Surface Plating: SN

Material Thickness [mm]: 0,40

Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Insulation Range Φ [mm]: 3,70 - 4,07

Seal(s): 10810380

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 10810380		3,89	290	2,45	0,05	3,95	0,10	6,20	0,20	5,40	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

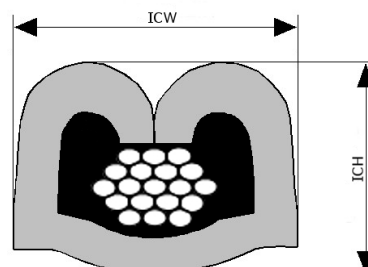

Terminal Part Number: 10863886
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1005
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ[mm]: 3,70 - 4,07
Seal(s): 10810380

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 10810380		3,89	290	2,45	0,05	3,95	0,10	6,20	0,20	5,40	0,10

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

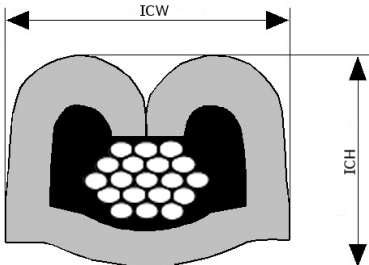

Crimp Information Sheet

DELPHI

Terminal Part Number: 10863886
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 4,00 | 6,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ [mm]: 3,20 - 4,30
Seal(s): 10810380

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 4,00 / 10810380		3,45	265	2,45	0,05	3,90	0,10	6,10	0,20	5,40	0,10
2010 6,00 / 10810380		4,05	320	2,80	0,05	3,90	0,10	6,60	0,20	5,50	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

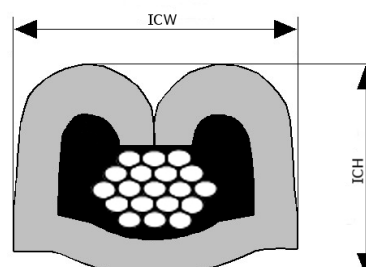

Terminal Part Number: 10863886
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 6,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2083
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 4,00 - 4,30
Seal(s): 10810380

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 6,00 / 10810380		4,15	320	2,80	0,05	3,90	0,10	6,60	0,20	5,50	0,10

Cable type code legend:

2083:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC (YW)
Insul. Wall Designator: THIN

