

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00 | 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,05 - 2,70
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324995		2,23	120	1,60	0,05	3,05	0,10	6,20	0,20	6,30	0,20
1005 2,00 / 15324995		2,58	200	1,75	0,05	3,10	0,10	6,30	0,20	6,40	0,20

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

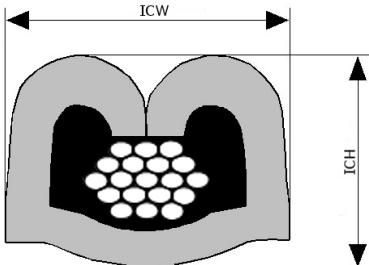

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*


Cable Type codes: 1005
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,05 - 2,40
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 1,00 / 15324995		2,23	120	1,60	0,05	3,05	0,10	6,20	0,20	6,30	0,20

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN



Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00 | 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,45 - 3,10
Seal(s): 15324994 | 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324995		2,58	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20
1007 2,00 / 15324994		2,98	200	1,75	0,05	3,10	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

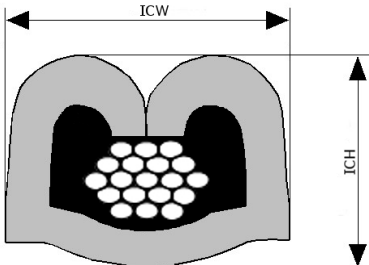

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00 | 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,45 - 3,10
Seal(s): 15324994 | 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324995		2,58	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20
1007 2,00 / 15324994		2,98	200	1,75	0,05	3,10	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

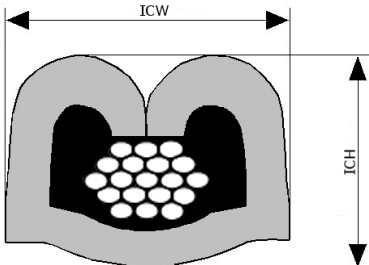

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,45 - 2,70
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15324995		2,58	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

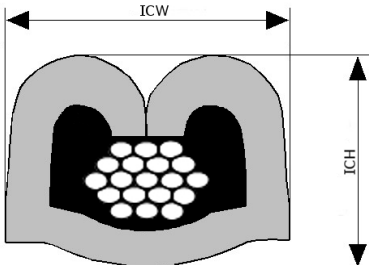

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00 | 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,90 - 3,95
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 1,00 / 15324994		3,17	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20
1009 2,00 / 15324994		3,73	200	1,75	0,05	3,10	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

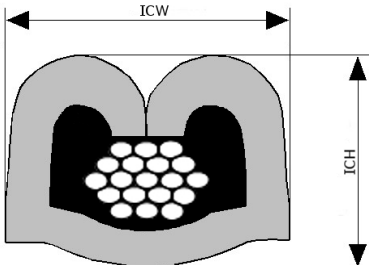

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 3,50 - 3,95
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 2,00 / 15324994		3,73	200	1,75	0,05	3,10	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

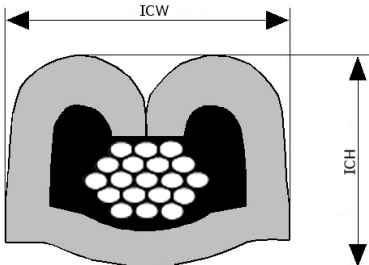

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1009
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,90 - 3,43
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 1,00 / 15324994		3,17	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1009:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

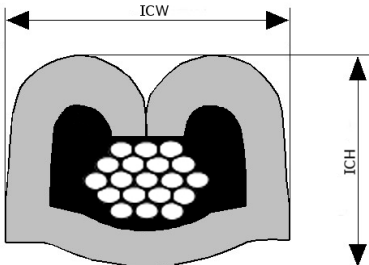

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,90 - 3,15
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 1,00 / 15324994		3,03	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

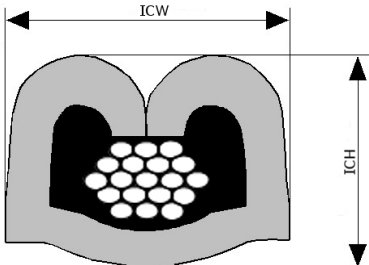

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1094
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,90 - 3,15
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 1,00 / 15324994		3,03	120	1,60	0,05	3,05	0,10	6,30	0,20	6,30	0,20

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

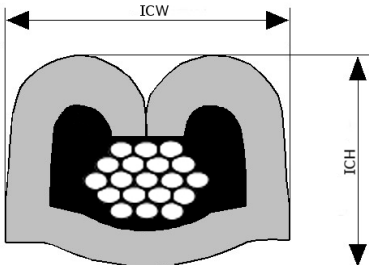

Crimp Information Sheet

DELPHI

Terminal Part Number: 12052455
 Surface Plating: SN
 Material Thickness [mm]: 0,40
 Cross Section [mm²]: 1,00 | 1,50 | 2,00 | 2,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,80 - 3,00
 Seal(s): 15324995 | 12052388

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,00 / 15324995		1,95	160	1,65	0,05	2,55	0,10	6,00	0,10	6,40	0,20
2010 1,00 / 12052388		1,95	160	1,65	0,05	2,55	0,10	6,00	0,10	6,40	0,20
2010 1,50 / 15324995		2,20	200	1,75	0,05	2,55	0,10	6,20	0,20	6,40	0,20
2010 1,50 / 12052388		2,20	200	1,75	0,05	2,55	0,10	6,20	0,20	6,40	0,20
2010 2,00 / 15324995		2,46	230	1,85	0,05	2,55	0,10	6,35	0,20	6,50	0,20
2010 2,00 / 12052388		2,46	230	1,85	0,05	2,55	0,10	6,35	0,20	6,50	0,20
2010 2,50 / 12052388		2,80	250	1,95	0,05	2,60	0,10	6,50	0,20	6,50	0,20
2010 2,50 / 15324995		2,80	250	1,95	0,05	2,60	0,10	6,50	0,20	6,50	0,20

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

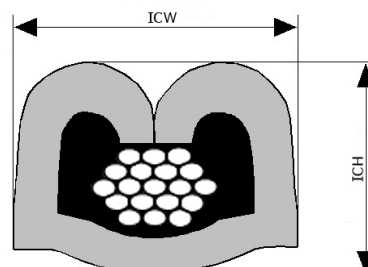

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2013
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,80
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 2,00 / 15324994		2,65	180	1,65	0,05	2,90	0,10	6,10	0,20	6,30	0,20

Cable type code legend:

2013:

Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF
Insul. Wall Designator: THIN

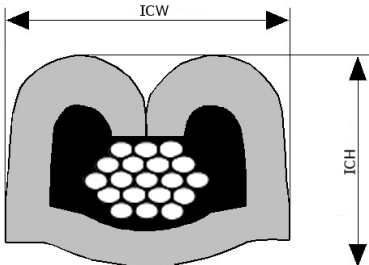

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2017
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,40
Seal(s): 12052388

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 1,50 / 12052388		2,20	333	1,60	0,05	3,00	0,10	5,90	0,10	6,40	0,20

Cable type code legend:

2017: FLR41X-B, FLRY-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PA, PP, PVC, XLPE
Insul. Wall Designator: THIN

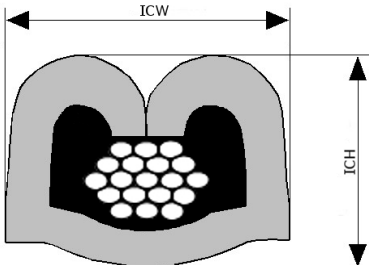

Terminal Part Number: 12052455
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 1,00 | 1,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,90 - 2,40
Seal(s): 15324995

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 1,00 / 15324995		2,00	120	1,60	0,05	2,95	0,10	6,20	0,20	6,30	0,20
8000 1,50 / 15324995		2,30	160	1,60	0,05	2,95	0,10	6,20	0,20	6,30	0,20

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

