

Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,85 - 2,40

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10
1005 1,00		2,23	120	1,35	0,05	2,05	0,10	2,30	0,10	2,60	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

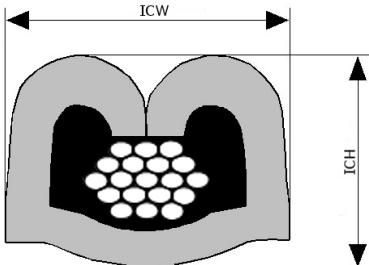

Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]

Insulation Range Φ[mm]: 1,85 - 2,20

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1005:


Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN



Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED

Insulation Range Φ[mm]: 1,85 - 2,20

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

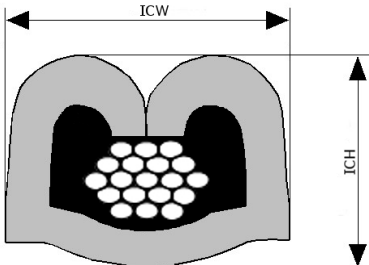

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005 + 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 + 1005 0,35		1,60 + 1,60	50	1,15	0,05	2,00	0,10	2,70	0,10	2,30	0,10
1005 0,35 + 1005 0,50		1,60 + 1,74	50	1,20	0,05	1,15	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

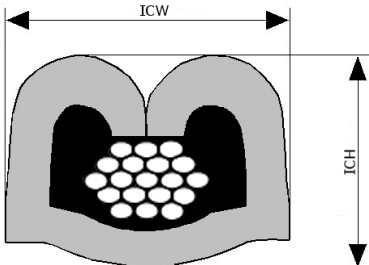

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

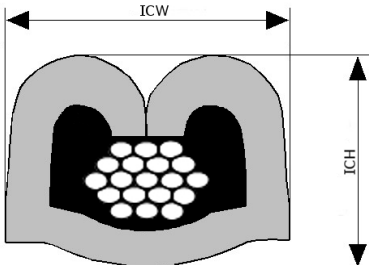

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

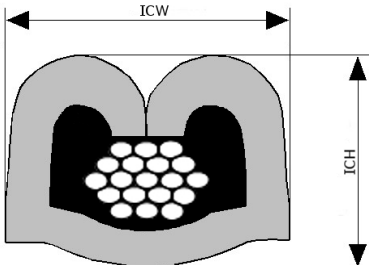

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

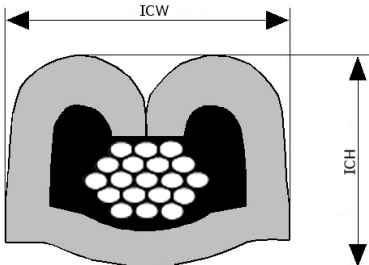

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,06 - 1,25
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,80		1,16	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1021:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

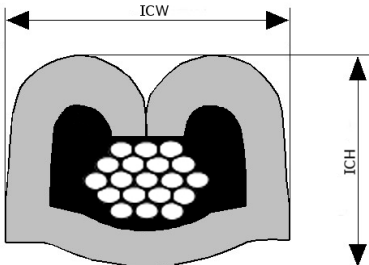

Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1021

Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED

Insulation Range Φ[mm]: 1,06 - 1,25

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,80		1,16	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1021:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: NONE

Insul. Wall Designator: NONE

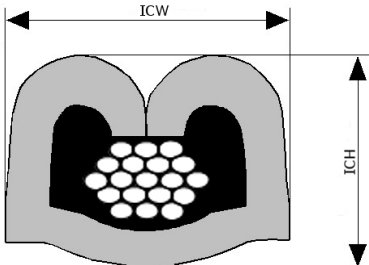

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1025:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

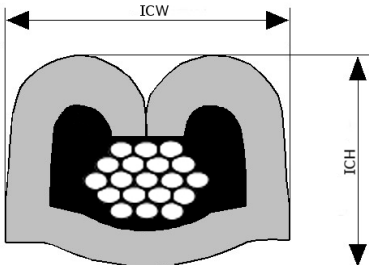

Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1025

Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED

Insulation Range Φ[mm]: 1,85 - 2,18

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

1025:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE

Insul. Wall Designator: THIN

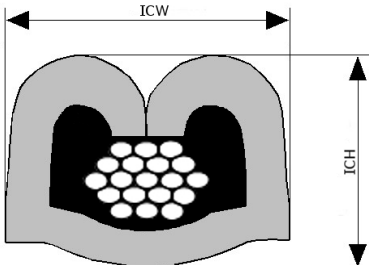

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1026
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

1026:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

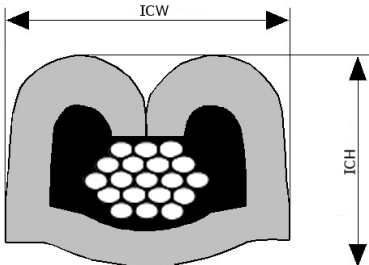

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1026
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

1026:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

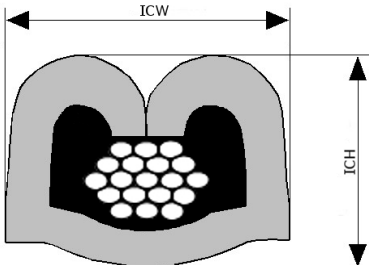

Crimp Information Sheet

DELPHI

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75 | 1,00 | 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ [mm]: 1,60 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,75		1,75	120	1,30	0,05	1,90	0,10	2,15	0,10	2,55	0,10
2010 1,00		1,95	160	1,40	0,05	1,90	0,10	2,35	0,10	2,55	0,10
2010 1,50		2,20	244	1,40	0,05	2,10	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

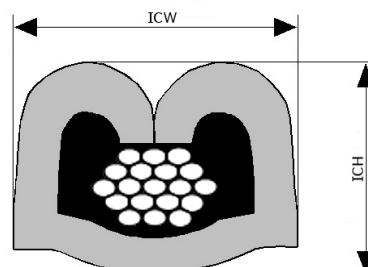

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 1,60 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,75		1,75	90	1,15	0,05	2,05	0,10	2,10	0,10	2,55	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

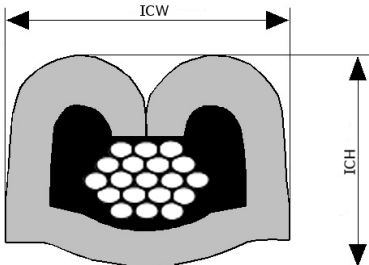

Crimp Information Sheet

DELPHI

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ [mm]: 1,30 - 1,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50		1,50	115	1,15	0,05	2,05	0,10	2,05	0,10	2,50	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

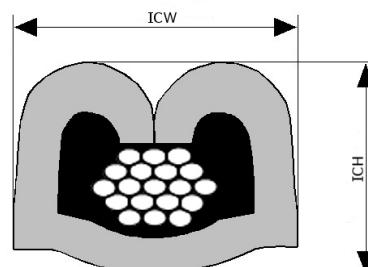

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010 + 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 + 2010 0,35	TOP	1,34 + 1,34	50	1,30	0,05	1,90	0,10	2,60	0,10	2,55	0,10
2010 0,35 + 2010 0,50	TOP	1,34 + 1,50	50	1,35	0,05	1,90	0,10	2,70	0,10	2,60	0,10
2010 0,50 + 2010 0,50		1,50 + 1,50	75	1,25	0,05	2,05	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

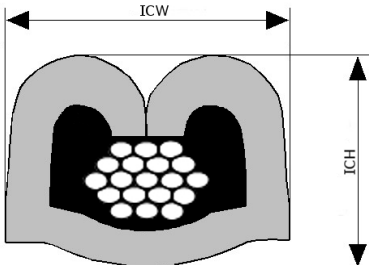

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2017
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,75		1,75	85	1,15	0,05	2,05	0,10	2,10	0,10	2,50	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PA, PP, PVC, XLPE
Insul. Wall Designator: THIN

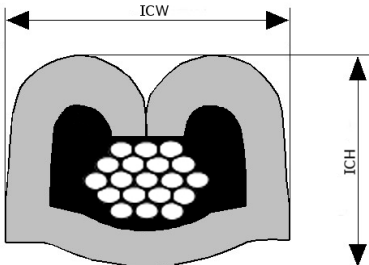

Terminal Part Number: 12129484

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,30 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 3004 + 3004

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30 + 3004 0,50		1,40 + 1,60	50	1,20	0,05	2,00	0,10	2,60	0,10	2,60	0,10
3004 0,50 + 3004 0,50		1,60 + 1,60	75	1,25	0,05	2,00	0,10	2,70	0,10	2,70	0,10

Cable type code legend:

3004: AVSS



Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE, X-PVC

Insul. Wall Designator: THIN

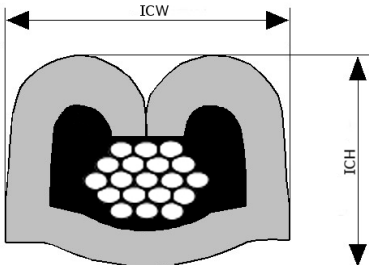

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 9003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,15 - 2,35
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,20	0,05	2,05	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

9003:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVDF
Insul. Wall Designator: MIX

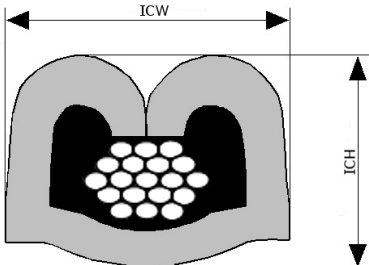

Terminal Part Number: 12129484
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 9003
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,15 - 2,35
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,20	0,05	2,05	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

9003:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVDF
Insul. Wall Designator: MIX

