




## TEMP RISE CURVE

### APEX® 6.3 FEMALE TERMINAL

Aptiv taxi: 13707625  
Cable range: 0.75 - 6.0 mm<sup>2</sup>  
Crimp method: Standard  
Contact plating: Sn halt  
Test method: Single circuit  
in free air\*  
Mated to: Male terminal

\* For reference only

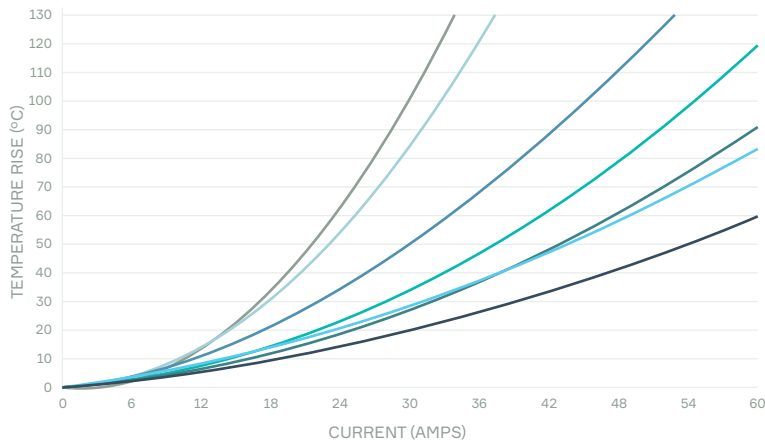

0.75 mm<sup>2</sup> 3.0 mm<sup>2</sup>  
1.0 mm<sup>2</sup> 4.0 mm<sup>2</sup>  
2.0 mm<sup>2</sup> 6.0 mm<sup>2</sup>  
2.5 mm<sup>2</sup>

The test data was collected from single circuits in a draft free enclosure. This model does not account for all of the variables that would be present in an actual application.

For additional detailed product performance, visit our website at [aptiv.com](https://www.aptiv.com)