

APEX® 2.8 FEMALE TERMINAL

Aptiv taxi: Cable range: Crimp method:


Test method:

Standard Contact plating: Sn Single circuit in free air*

15324842

Mated to: Male terminal

* For reference only

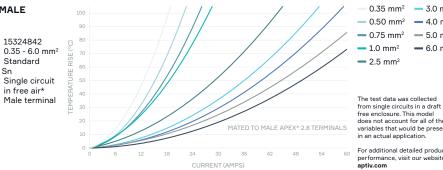

free enclosure. This model does not account for all of the variables that would be present in an actual application. For additional detailed product performance, visit our website at aptiv.com

The test data was collected

0.35 mm² - 3.0 mm²

4.0 mm²

- 5.0 mm²

- 6.0 mm²

— 0.50 mm²