
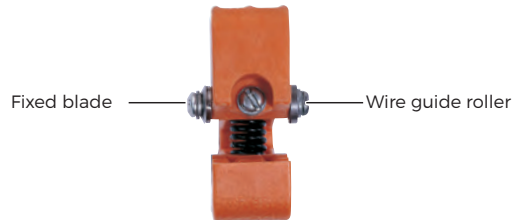


RINGER™ SHIELDED CABLE STRIPPERS

Precision stripping for most non-round shielded cable and other outer cable jackets, including extruded PTFE insulations.

- Spring loaded cutting head holds cable with consistently accurate tension, removing any need for adjustment.
- V-notch jaw automatically positions and holds cable, increasing cutting accuracy.
- Fixed blades are sized to insulation thickness, preventing inaccurate cuts, and 17-4 stainless steel construction assures long life.
- Wire guide roller maintains stripping head alignment, producing a square, clean cut.
- Not recommended for layered wrapped cable constructions.
- 90-day warranty on tools and blades

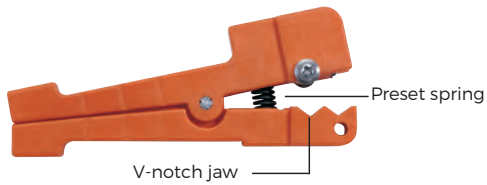


45-400
For cable diameters up to 3mm (0.12"). Blades sold separately - see list on next page

45-401
For cable diameters from 3mm (0.12") to 5.5 mm (0.22") with 5 Mil insulation thickness, including Kapton®. Comes with K-6492 blade

45-402
For cable diameters from 3mm (0.12") to 5.5 mm (0.22") with 8-10 Mil insulation thickness, including Kynar®. Comes with K-6493 blade

45-403
For cable diameters from 3mm (0.12") to 5.5 mm (0.22"). Blades sold separately - see list on next page

45-404
With "deep-V" for larger cable diameters up to 7.6mm (0.30")
Blades sold separately - see list on next page

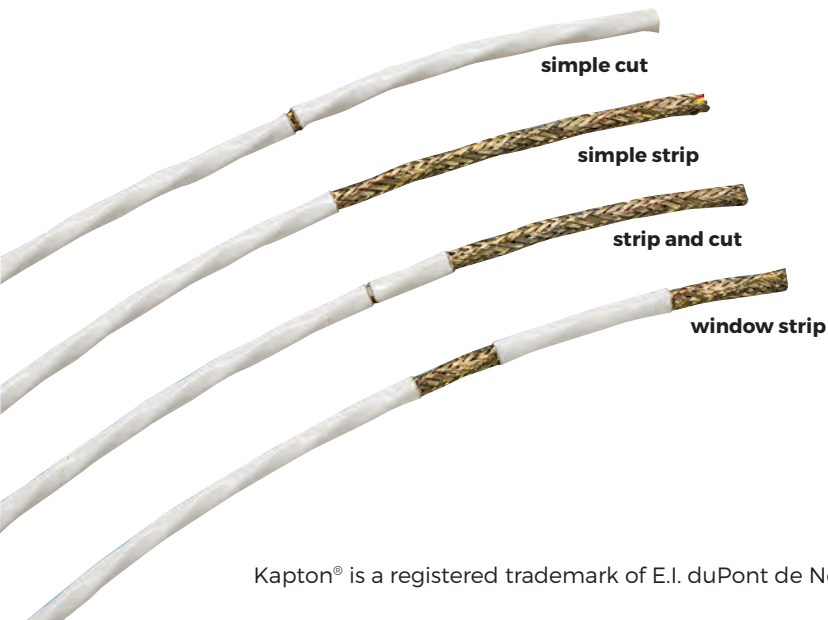

Kapton® is a registered trademark of E.I. duPont de Nemours and Company. Kynar® is a registered trademark of Penwall.

STRIPPING APPLICATIONS

SCORE CUT




Rotate tool down and away from you. Only 2 or 3 revolutions are usually required to score insulation.



Remove tool and bend cable at high spots on score line, breaking insulation loose.

AXIAL CUT



Use front blade (sold separately). Blade can be used for making length-wise cut or to remove long insulation slugs. Place cable in front notch, press tool head together and pull tool through end of cable, flex along cut line.



Use IDEAL Gripper™ Slug Remover (sold separately) to grasp slug and pull.

BLADES

- For use with any Ringer™ shielded cable stripper.
- Select blade with cutting depth less than insulation thickness.
- Contact IDEAL 800-435-0705 for FREE Application Engineering Service, blade selection or special stripping requests.



Cutting Depth mm/in.	Cat. No.
0.076mm / .0030 in.	K-6491
0.112mm / .0044 in.	K-6492
0.127mm / .0050 in.	45-2780-1
0.137mm / .0054 in.	45-2777-1
0.152mm / .0060 in.	K-6493
0.178mm / .0070 in.	K-6494

Cutting Depth mm/in.	Cat. No.
0.203mm / .0080 in.	K-6495
0.229mm / .0090 in.	K-6496
0.254mm / .0100 in.	K-6497
0.279mm / .0110 in.	K-6498
0.305mm / .0120 in.	K-6499
0.330mm / .0130 in.	K-6500

Cutting Depth mm/in.	Cat. No.
0.356mm / .0140 in.	K-6501
0.406mm / .0160 in.	K-6502
0.457mm / .0180 in.	K-6503
0.508mm / .0200 in.	K-6504
0.559mm / .0220 in.	K-6505
0.635mm / .0250 in.	45-2108-1

WIRE STOPS

- Provides uniform stripping length



Description	Cat. No.
9.5mm to 63.5 mm / 3/8 in. to 2-1/2 in.	LB-825
63.5mm to 127mm / 2-1/2 in. to 5 in.	LB-840

IDEAL GRIPPER® SLUG REMOVER



Description	Cat. No.
Slug Remover	45-333