
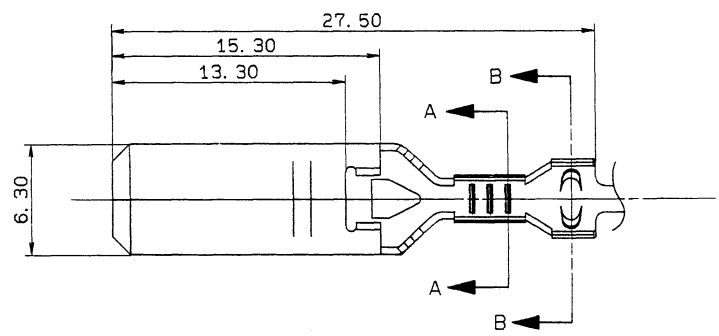



SECTION A-A

SECTION B-B

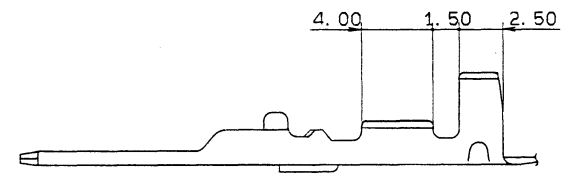

4				5	
PART NO.	C	D	MATERIAL	TREAT & FIN	APPLICABLE WIRE SIZE
7114-2870	2.7	4.5	C2680 t=0.4		AV 0.5 AVS 0.3~0.5
7114-2870-02	2.7	4.5		TIN PLATED	AV 0.5 AVS 0.3~0.5
7114-2871	3.7	5.5			AV 0.85~2 AVS 0.85~2
7114-2871-02	3.7	5.5		TIN PLATED	AV 0.85~2 AVS 0.85~2
7114-2872	4.7	6.5			AV 3. AVS 3
7114-2872-02	4.7	6.5		TIN PLATED	AV 3. AVS 3

LET	DATE	REVISION RECORD	NO.	CHKD
	90.09.07	NEW	C90-L976	M. K

GENERAL TOLERANCE									
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT		
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°	0.1		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1		
◎	±0.3	±0.5	±0.8	±1.4	±2	±30°	0.15		
SPECIFIED								WEIGHT	

CUSTOMER						MATL. SPEC.			TREAT. & FIN.			ISSUE MARK		
CUSTOMER PART NO.				CUSTOMER DWG NO.				SEE TABLE						
OFFICE				STD LIB NO.				NAME			M TYPE TERMINAL (M)			
VENDOR								-----			-----			
VENDOR NO.														
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.								
R	NEW	90.09.07	mm	5/1	3	7114-2870 ETC.								
APPROVED		CHECKED		DESIGN		DRAWN		DWG NO.		7114-2870:R		TRIAL PART NO.		
[Signature]		[Signature]		SAKA!		T. MAKITA								
90.8.12		90.9.7		90.9.07		82.08.02		90.09.07		YAZAKI		CORPORATION		