




1 2 3 4 5


品 番 PART NO.	処 理 TREATMENT	嵌 合 相 手 品 番 MATING PART NO.
7115-1591	銅下地 光沢銅メッキ条材 COPPER SUBSTRATE PLATING. GLOSSY TIN PLATING (STRIP)	7113-2331
7115-1591-08	ニッケル下地 金メッキ 金フラッシュメッキ NICKEL SUBSTRATE PLATING. GOLD PLATING. GOLD FLASH PLATING	7113-2331-08

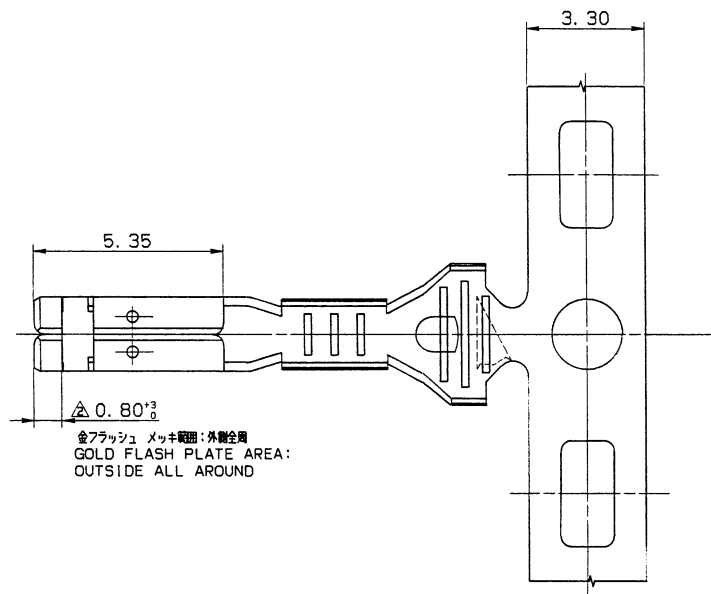

SEC. A-A



SEC. B-B

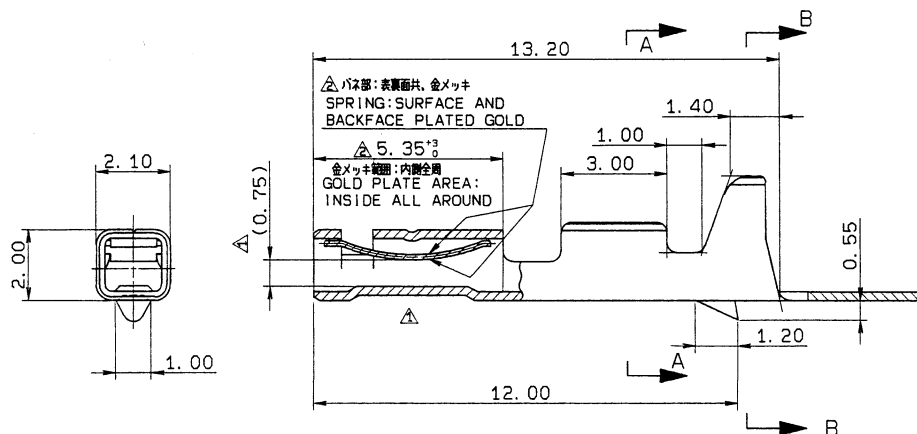

NOTES

- 1) APPLICABLE WIRE SIZE: AVS0.2 TO AVS0.5
- 2) MATERIAL. BODY: C2600, t=0.25
SPRING: C1720, t=0.15
- 3) INSERTION FORCE: 100 - 500 g
SEPARATION FORCE: 100 - 400 g (CONTACT FORCE: 450-600 g)

注記

- 1) 適用電線サイズ: AVS0.2~AVS0.5
- 2) 材質 本体: C2600, t=0.25
バネ: C1720, t=0.15
- 3) 挿入力: 100~500g
離脱力: 100~400g (接触力: 450~600g)

ISSUE MARK

CUSTOMER	SEE NOTES	TREAT. & FIN.	SEE TABLE
CUSTOMER PART NO.	CUSTOMER DWG NO.	NAME	TLC TERMINAL FEMALE
OFFICE	STDLIB NO.	PART NO.	7115-1591 ETC Δ
VENDOR	VENDOR NO.	DWG NO.	7115-1591:R
		TRIAL PART NO.	
		YAZAKI CORPORATION	

GENERAL TOLERANCE									
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT		
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15		
SPECIFIED					WEIGHT				
					0.16 g				

LET	DATE	REVISION RECORD	NO.	CHKD
Δ	90.02.19	ADDED NEW PART NO.	C90-6142	K. S
Δ	86.04.30	CHANGED FORM & RENEW	C86-5493	T. M
	85.11.11	NEW	C85-6148	H. H

1 2 3 4 5