





PART NO. AND CH. CODE	D	E	F	G	WIRE SIZE
7116-1420	7.00	10.50	2.00	5.20	AVS 0.3~AVS 0.5 EQUIVALENT
7116-1421	3.40	12.30	3.10	6.10	AVS 0.85~AVX 2 EQUIVALENT

NOTES

1. MATING PART NO. : 7114-1420 ETC.
2. APPLICABLE RUBBER STOPPER NO.
: 7157-3648 ETC.

注記

1. 嵌合相手品番 : 7114-1420 ETC.
2. 適用ゴム栓品番 : 7157-3648 ETC.

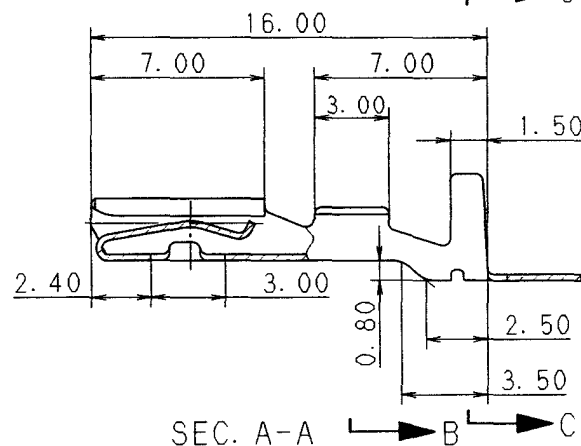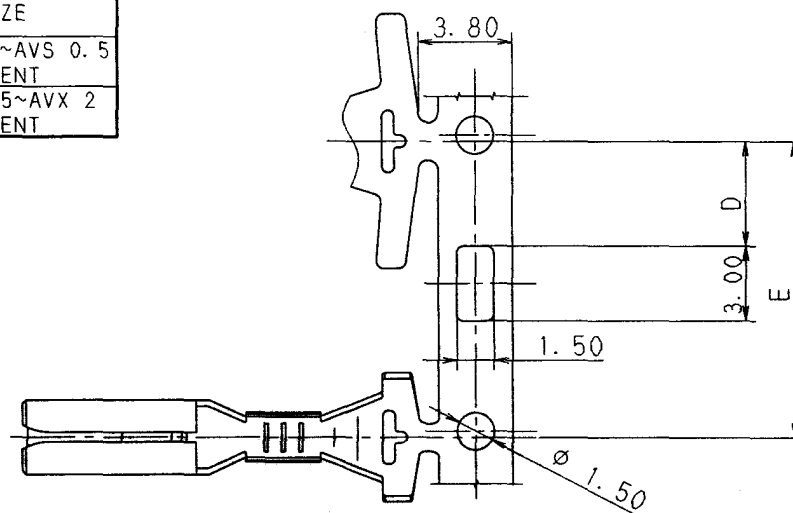

SEC. C-C

SEC. B-B

SEC. A-A

00.01.28	CHANGED NOTE	C00-L148	C. T	CUSTOMER	MATL. COPPER ALLOY (t=0.25)	TREAT.
87.01.09	CHANGED NOTE & RENEW	7MC-0009	A. M	CUSTOMER PART NO.	SPEC. TIN PLATING	& FIN.
85.05.17	NEW	C85-5489	Y. K	OFFICE	NAME	090 W/P TERMINAL FEMALE
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR	
GENERAL TOLERANCE				VENDOR NO.		
10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
© ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED				MASS		
				g		
DWG TYPE		DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R		NEW	85.05.17	mm	5/1	3
APPROVED		CHECKED	CHECKED	DESIGN	DRAWN	
加藤		山梨	野鈴	A. MAEDA	KIKUCHI	
00.02.17		00.02.15	00.02.08	85.05.17	00.01.28	
PART NO. CH. CODE						7116-1420 ETC.
DWG NO.						7116-1420:R
SET DWG NO.						
YAZAKI CORPORATION						

ISSUE MARK