


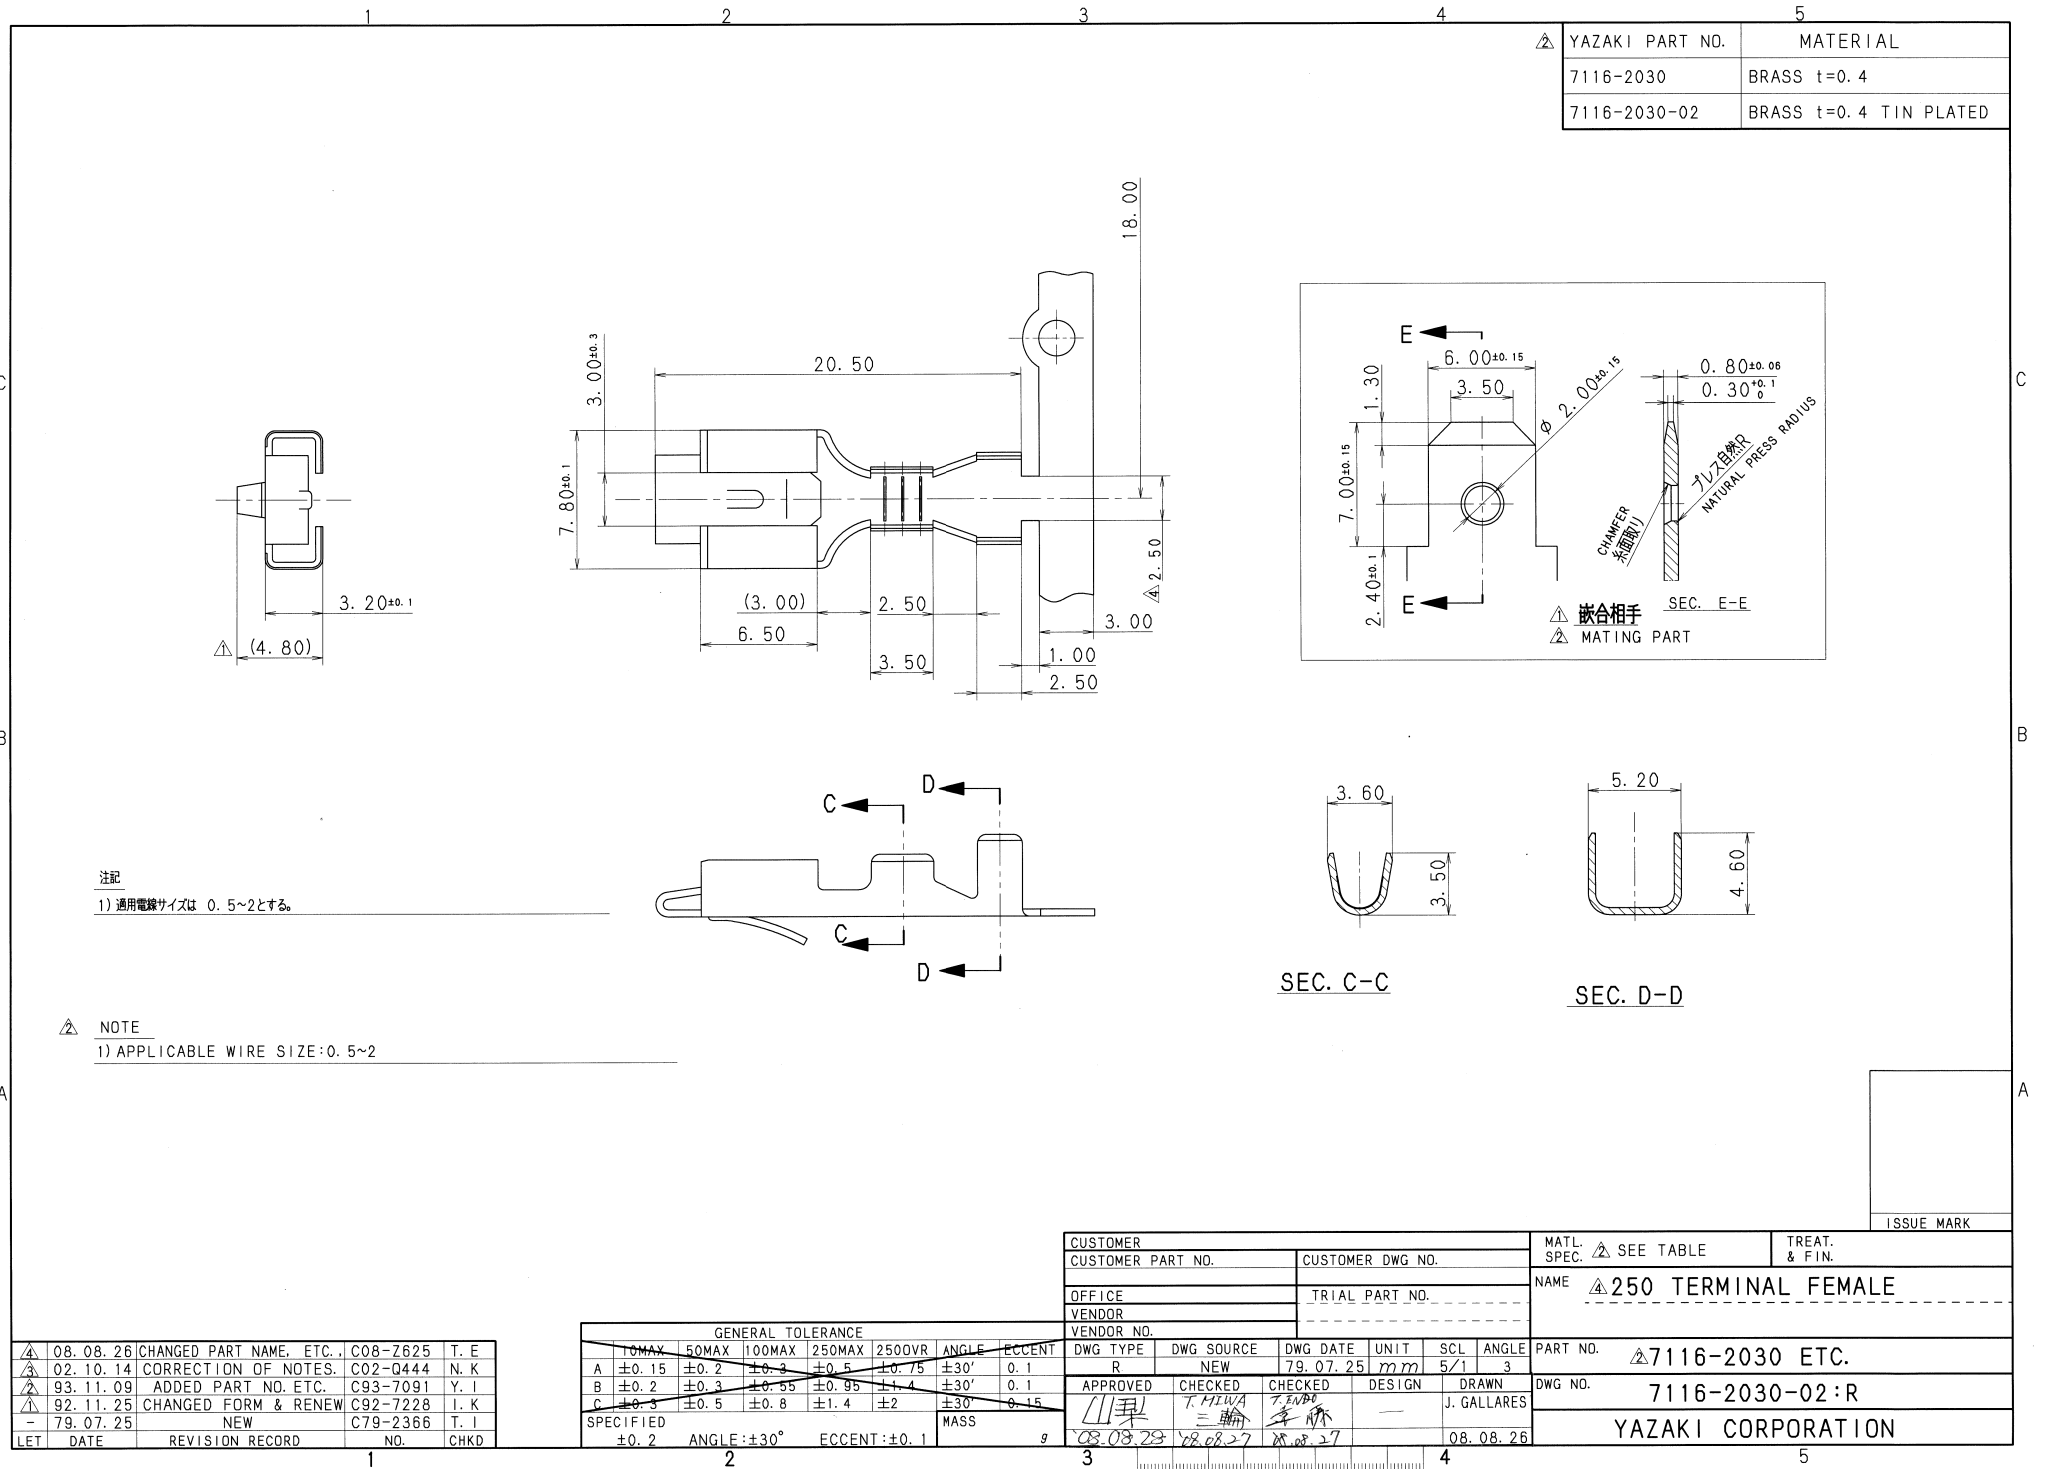

注記

1) 適用電線サイズは 0.5~2とする。

△ NOTE

1) APPLICABLE WIRE SIZE:0.5~2

△	08.08.26	CHANGED PART NAME, ETC.	C08-2625	T. E
△	02.10.14	CORRECTION OF NOTES.	C02-0444	N. K
△	93.11.09	ADDED PART NO. ETC.	C93-7091	Y. I
△	92.11.25	CHANGED FORM & RENEW	C92-7228	I. K
-	79.07.25	NEW	C79-2366	T. I
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30' 0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30' 0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30' 0.15
SPECIFIED	±0.2	ANGLE:±30°	ECCENT:±0.1	MASS	g	

CUSTOMER		MATL. SPEC. △ SEE TABLE		TREAT. & FIN.	
CUSTOMER PART NO.		CUSTOMER DWG NO.		NAME △ 250 TERMINAL FEMALE	
OFFICE		TRIAL PART NO.		PART NO. △ 7116-2030 ETC.	
VENDOR		DESIGN		DWG NO. 7116-2030-02:R	
VENDOR NO.		DRAWN		YAZAKI CORPORATION	
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	79.07.25	mm	5/1	3
APPROVED	CHECKED	CHECKED	DESIGN	J. GALLARES	
08.08.29	08.08.27	08.08.27		08.08.26	