


1


2

3



PART NO.	A	B	W ₁	W ₂	H ₁	H ₂	WIRE SIZE	MATERIAL
7116-2783	4.00	7.50	3.60	5.30	(3.90)	(4.70)	AVS 0.85-2.00 EQUIVALENT	C2600R T=0.40
7116-2783-02	4.00	7.50	3.60	5.30	(3.90)	(4.70)	AVS 0.85-2.00 EQUIVALENT	C2600R T=0.40 TIN PLATING
7116-2784	3.00	6.50	2.40	3.90	(2.60)	(3.40)	AVS 0.20-0.50 EQUIVALENT	C2600R T=0.40
7116-2784-02	3.00	6.50	2.40	3.90	(2.60)	(3.40)	AVS 0.20-0.50 EQUIVALENT	C2600R T=0.40 TIN PLATING



SEC. C-C



SEC. D-D

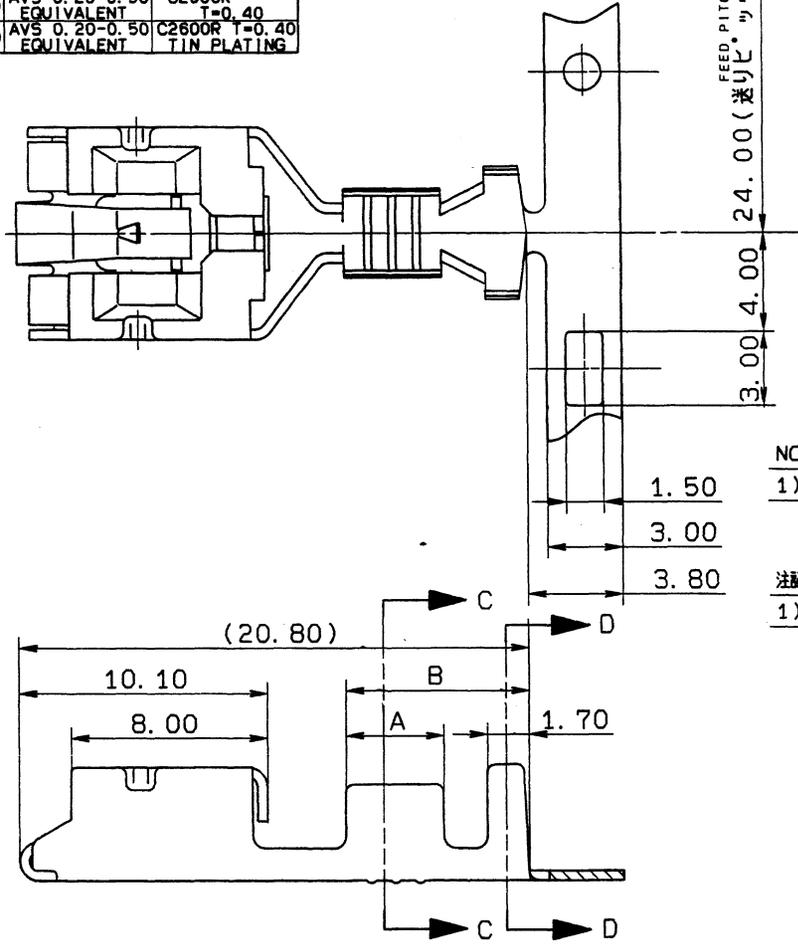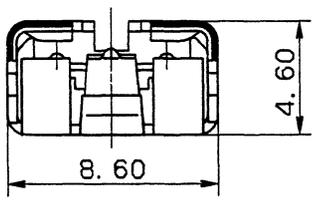

NOTE

1) APPLICABLE HOUSING NO. : 7123-2511.

注

1) 適用ハウジング品番: 7123-2511.

ISSUE MARK

										CUSTOMER			MATL. SPEC.		TREAT. & FIN.	
										CUSTOMER PART NO.			CUSTOMER DWG NO.			
										OFFICE			STDLIB NO.		NAME 250 TERMINAL FEMALE	
										VENDOR			VENDOR NO.		(POSITIVE LOCK)	
GENERAL TOLERANCE										DWG TYPE			DWG SOURCE		PART NO. 7116-2783 ETC.	
										R			NEW		DWG NO. 7116-2783:R	
										APPROVED			CHECKED		TRIAL PART NO.	
										K. Sato			T. Mayjima		YAZAKI CORPORATION	
										89.02.17			89.02.16		58.05.16 89.01.27	

1

2

3

