

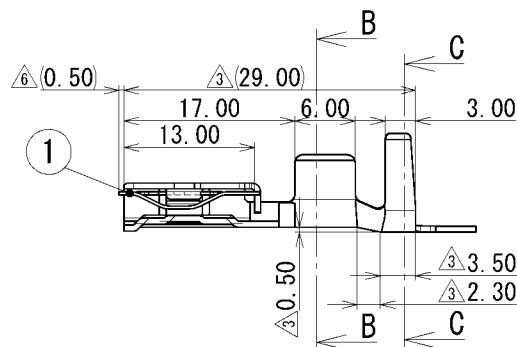




PART NO. AND CH. CODE	W ₁	H ₁	W ₂	H ₂	APPLICABLE WIRE SIZE
7116-3250	6.60	(7.20)	9.60	(9.80)	④ AV 5~8, AVS 5
7116-3251	4.80	(5.20)	7.20	(8.80)	④ AV 3, AVS 3, AVS 3f
7116-3252	4.00	(4.30)	7.20	(8.80)	FLW 0.85~2

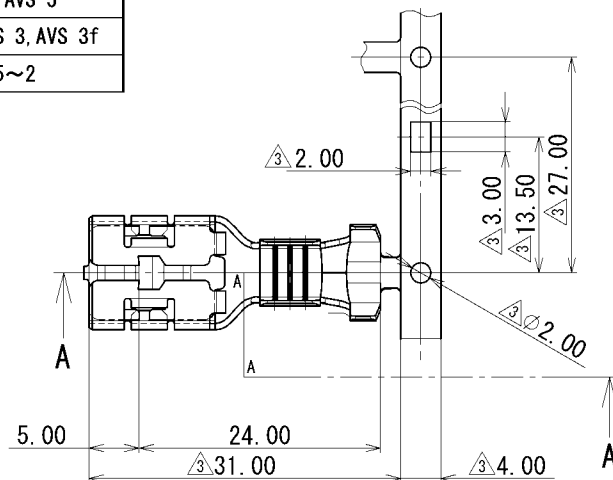

SEC. A-A



SEC. B-B



SEC. C-C

YAZAKI PART NO. AND CH. CODE	NO.	MATERIAL
7116-3250 ETC.	-	COPPER ALLOY (t=0.60) TIN PLATING
7157-7270	①	STAINLESS STEEL (t=0.30)

注記

1. かん合オスターミナルNO. : 7114-3250 ETC.

NOTE

1. MATING MALE TERMINAL NO. : 7114-3250 ETC.

⑥	2025/03/12	CHANGED DIMENSION	C25-Y089	Y. W
⑤	2018/09/25	DELETED PART NO., ETC.	C18-P326	Y. M
④	2016/08/04	CHANGED APPLICABLE WIRE SIZE, ETC.	C16-Z607	A. Q
③	2006/02/27	ADDED PART NO., ETC.	C06-Z227	K. U
②	1996/08/07	CHANGED DIMENSION	C96-6845	H. K
①	1993/11/08	CHANGED DWG. NO, ETC.	C93-7089	Y. I
	1988/03/16	NEW	8MC-4033	M. Y
LET	DATE	REVISION RECORD	NO.	CHKD
GENERAL TOLERANCE				
	10MAX	50MAX	100MAX	250MAX
A	±0.15	±0.2	±0.3	±0.5
B	±0.2	±0.3	±0.55	±0.95
③	±0.3	±0.5	±0.8	±1.4
SPECIFIED				MASS
				⑤ (3.5) g

CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.
OFFICE	TRIAL PART NO.	
VENDOR	VENDOR NO.	
DWG TYPE	DWG SOURCE	DWG DATE
R	NEW	1988/03/16
APPROVED	CHECKED	CHECKED
M. IMAMURA	S. NONAKA	
2025/03/12	2025/03/12	

MATL. SPEC.	SEE TABLE	TREAT. & FIN.	SEE TABLE
NAME ④ L TYPE FEMALE TERMINAL			

PART NO. CH. CODE	7116-3250 ETC.		
DWG NO.	① 7116-3250:R	SET DWG NO.	
YAZAKI CORPORATION			