




PART NO. AND CH. CODE	COLOR
7129-6051	NATURAL
7129-6051-30	BLACK
7129-6051-40	LIGHT GRAY
7129-6051-90	BLUE

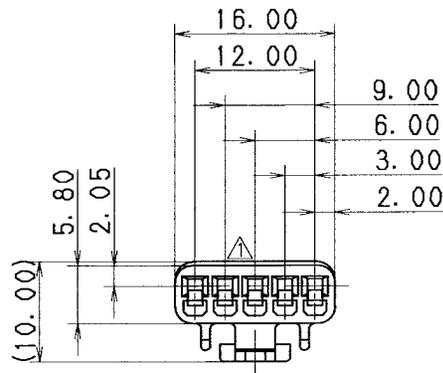

△ 注記

- 1. 勘合相手品番 : 7228-6051
- 2. 適用端子品番 : 7115-1591
- 3. 適用ゴム栓品番 : 7157-3621

△ NOTE

- 1. MATING PART NO. : 7228-6051
- 2. APPLICABLE TERMINAL NO. : 7115-1591
- 3. APPLICABLE RUBBER STOPPER NO. : 7157-3621

ISSUE MARK

△ 01.09.17		CORRECTION OF A CLERICAL ERROR & ADDED NOTE		C01-X866	K. F	CUSTOMER		MATERIAL SPEC. PBT		TREAT. & FIN.						
96.10.22		NEW		C96-M950	M. T	CUSTOMER PART NO.		CUSTOMER DWG NO.		NAME						
LET	DATE	REVISION RECORD		NO.	CHKD	OFFICE		TRIAL PART NO.		TLC SEALED CONNECTOR						
GENERAL TOLERANCE						VENDOR		VENDOR NO.		HOUSING FEMALE 5P						
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.	7129-6051 ETC.	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	96.10.22	mm	2/1	3	CH. CODE		
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		DWG NO.	7129-6051:R	
©	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	加藤 山梨		鳥居	WATANABE	S. UEBO		SET DWG NO.		
SPECIFIED						MASS		g		01.09.18	01.09.17	01.09.17	83.12.16	01.09.17	YAZAKI CORPORATION	