


1

2

3

RUBBER PART GENERAL TOLERANCE			
PART DIM.	1	2	③
0 TO 3	± 0.2	± 0.3	± 0.4
3 TO 6	± 0.2	± 0.4	± 0.5
6 TO 10	± 0.3	± 0.5	± 0.6
10 TO 18	± 0.3	± 0.6	± 0.8
18 TO 30	± 0.4	± 0.8	± 1.0
30 TO 50	± 0.5	± 1.0	± 1.5
50 TO 80	± 0.6	± 1.2	± 2.0
80 TO 120	± 0.7	± 1.4	± 2.5
120 TO 180	± 0.8	± 1.6	± 3.0
180 TO 250	± 1.0	± 2.0	± 4.0
250 TO 315	± 1.2	± 2.5	± 5.0
315 TO 400	± 1.5	± 3.0	± 6.0
400 TO 500	± 1.8	± 3.5	± 7.0
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %

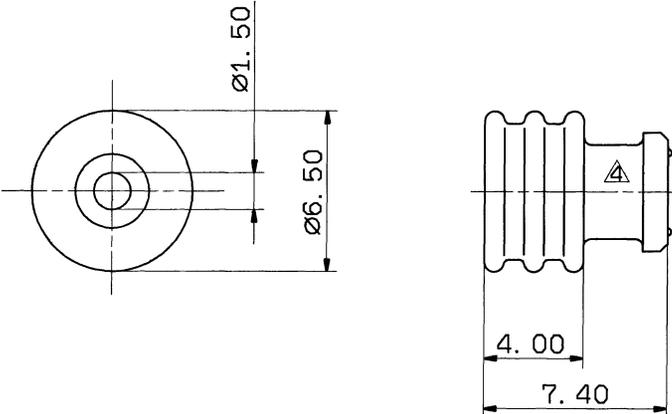

注記

- 1. 適用電線サイズ : CAVS 1.25 Δ
 AV 0.5 ~ 0.85 Δ
 AVS 0.5 ~ 1.25 Δ
- 2. 適用雄端子品番 : 7114-1232
 適用雌端子品番 : 7116-1232

Δ NOTES

- 1. APPLICABLE WIRE SIZE : CAV 1.25 Δ
 AV 0.5 ~ 0.85 Δ
 AVS 0.5 ~ 1.25 Δ
- 2. APPLICABLE TERMINAL MALE NO. : 7114-1232
 APPLICABLE TERMINAL FEMALE NO. : 7116-1232

ISSUE MARK

Δ 93.12.08		CHANGED APPLICABLE WIRE SIZE		C93-7153	M. K	CUSTOMER		MATL. SPEC.		SI RUBBER (BLACK)		TREAT. & FIN.		
Δ 89.07.12		RENEW AND ADD. SECTION AND CHANGED DRAWING		C89-L754	K. A	CUSTOMER PART NO.		CUSTOMER DWG NO.		NAME		RUBBER STOPPER FOR		
LET	DATE	REVISION RECORD	NO.	CHKD	OFFICE		STDLIB NO.		Δ		W-TYPE			
GENERAL TOLERANCE					VENDOR		VENDOR NO.		PART NO.		7157-3560			
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30°	0.1	R	RENEW	83.06.17	mm	5/1	3	
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	DWG NO.	
C	±0.3	±0.5	±0.8	±1.4	±2	±30°	0.15	許	八木	辻	H. SAKAI	甲斐	7157-3560:R	
SPECIFIED GENERAL TOLERANCE 3					WEIGHT		g		83.06.17		93.12.08		YAZAKI CORPORATION	

1

2

3