

1

2

3


RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	

注記

- 適用電線サイズ : AVSS 2 \triangle
AVS 2 \triangle
AV 1.25 ~ 2 \triangle
- 適用端子番号 : 7114-1233
適用端子番号 : 7116-1233

\triangle NOTES

- APPLICABLE WIRE SIZE : AVSS 2 \triangle
AVS 2 \triangle
AV 1.25 ~ 2 \triangle
- APPLICABLE TERMINAL MALE NO. : 7114-1233
APPLICABLE TERMINAL FEMALE NO. : 7116-1233

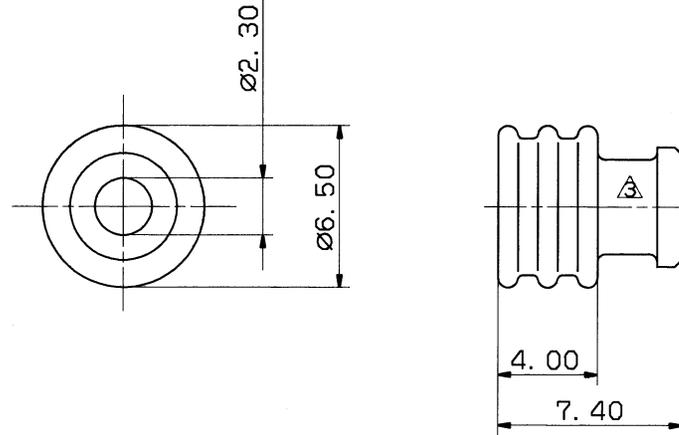

ISSUE MARK

\triangle 93.12.08	CHANGED APPLICABLE WIRE SIZE	C93-7153	M. K	CUSTOMER		MATL. SI RUBBER (BROWN)	TREAT. & FIN.
\triangle 89.07.12	RENEW AND ADD. SECTION AND CHANGED DRAWING	C89-L755	K. A	CUSTOMER PART NO.	CUSTOMER DWG NO.	RUBBER STOPPER FOR	
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR	W-TYPE	
GENERAL TOLERANCE				VENDOR NO.			
	10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED GENERAL TOLERANCE 3				WEIGHT g			
		93.12.21		93.12.15		93.12.08	
H. SAKAI		甲斐		83.06.17		93.12.08	
PART NO. 7157-3561-80				DWG NO. 7157-3561-80:R TRIAL PART NO.			
YAZAKI CORPORATION							

1

2

3

