
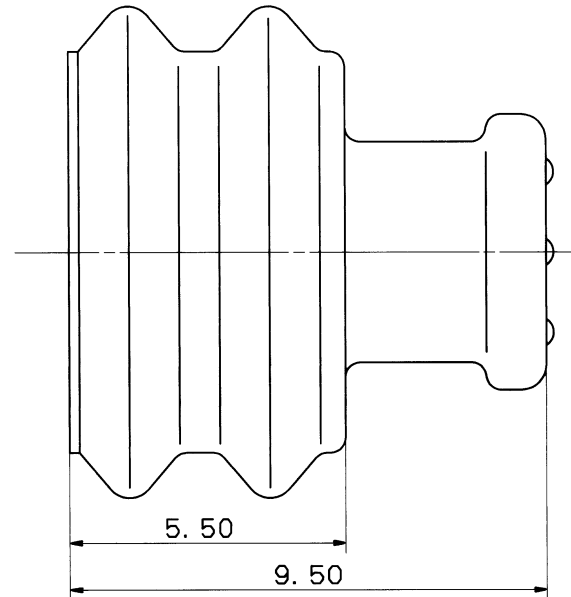


1

2

3

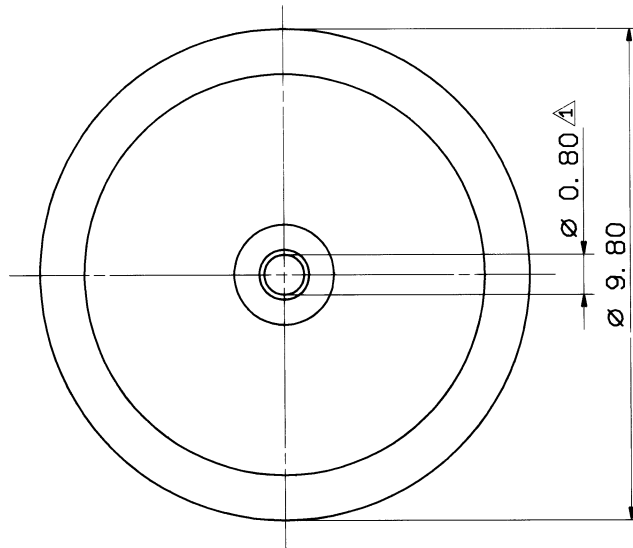

RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	2	③	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	

注 記

- 適用電線サイズ: CAVUS 0.5, 0.85, 1.25sq 相当
- 適用端子番号 : 7114-2873, 7116-2873 ETC.
- 適用ハウジング品番 : 7122-6224-40, 7223-6224-40 ETC.

NOTES

- APPLICABLE WIRE SIZE
: CAVUS 0.5, 0.85, 1.25sq (EQUIVALENT)
- APPLICABLE TERMINAL NO.
: 7114-2873, 7116-2873 ETC.
- APPLICABLE HOUSING NO.
: 7122-6224-40, 7223-6224-40 ETC.

ISSUE MARK

				CUSTOMER				MATL. SI RUBBER (GRAY)				TREAT. & FIN.															
				CUSTOMER PART NO.				CUSTOMER DWG NO.																			
A 92.02.13				CHANGED FORM				C92-6215				H. Y															
90.09.06				N E W				C90-L961				M. K															
LET DATE				REVISION RECORD				NO.				CHKD															
GENERAL TOLERANCE								VENDOR NO.																			
10MAX		50MAX		100MAX		250MAX		250OVR		ANGLE		ECCENT		DWG TYPE		DWG SOURCE		DWG DATE		UNIT		SCL		ANGLE			
A ±0.15		±0.2		±0.3		±0.5		±0.75		±30'		0.1		R		N E W		90.09.06		mm		10/1		3			
B ±0.2		±0.3		±0.55		±0.95		±1.4		±30'		0.1		APPROVED		CHECKED		CHECKED		DESIGN		DRAWN					
C ±0.3		±0.5		±0.8		±1.4		±2		±30'		0.15		S. YAMADA				90.06.18		92.02.13							
SPECIFIED								WEIGHT																			
GENERAL TOLERANCE 3								g																			

PART NO. 7157-3568-40

DWG NO. 7157-3568-40:R TRIAL PART NO. 7F8957-8747

YAZAKI CORPORATION

1

2

3