
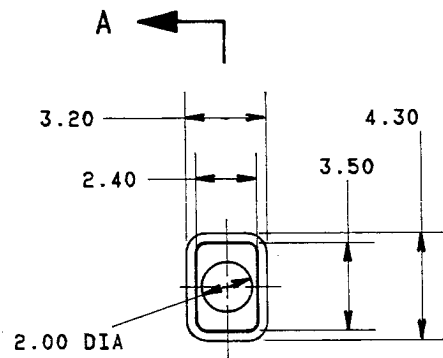


SEC. A-A



RUBBER PART GENERAL TOLERANCE				
PART DIM.	1	(2)	3	
0 TO 3	± 0.2	± 0.3	± 0.4	
3 TO 6	± 0.2	± 0.4	± 0.5	
6 TO 10	± 0.3	± 0.5	± 0.6	
10 TO 18	± 0.3	± 0.6	± 0.8	
18 TO 30	± 0.4	± 0.8	± 1.0	
30 TO 50	± 0.5	± 1.0	± 1.5	
50 TO 80	± 0.6	± 1.2	± 2.0	
80 TO 120	± 0.7	± 1.4	± 2.5	
120 TO 180	± 0.8	± 1.6	± 3.0	
180 TO 250	± 1.0	± 2.0	± 4.0	
250 TO 315	± 1.2	± 2.5	± 5.0	
315 TO 400	± 1.5	± 3.0	± 6.0	
400 TO 500	± 1.8	± 3.5	± 7.0	
500 OVER	± 0.4 %	± 0.8 %	± 1.5 %	

NOTES

- MUST BE FREE OF FLASH AND IMPERFECTION THAT AFFECT FUNCTION ON ALL SEALING POSITIONS.
- COLOR : BLACK

注記

- 各シール面ニ機能上有害ナバリ、変形等ノナキコト
- 色ハ黒トスル

ISSUE MARK

				CUSTOMER		MATL. SELF-LUBRICATING		TREAT. & FIN.	
				CUSTOMER PART NO.		CUSTOMER DWG NO.			
				OFFICE NAGOYA		STDLIB NO.			
84.05.17 NEW C84-5498 永野				VENDOR		NAME		TLC W/P CONNECTOR	
LET DATE REVISION RECORD NO. CHKD				VENDOR NO.		RUBBER STOPPER			
GENERAL TOLERANCE									
10MAX	50MAX	100MAX	250MAX	2500YR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW	84.05.17
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED	CHECKED
C ±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	加藤	永野	KATOH
SPECIFIED RUBBER PART GENERAL TOLERANCE 1						WEIGHT	84.05.24 84.05.17 84.05.17 82.08.25 84.05.17		
						0.04 g	7157-3622		
							7157-3622:R		
							082157-1745		
							YAZAKI CORPORATION		