


1

2

3

STD LIB-SW2016

PART NO. AND CH. CODE	MATERIAL	COLOR
△ 7198-5019-30, A	PBT	BLACK
△ 7198-5019-40, A		LIGHT GRAY
△ 7198-5019, A		NATURAL

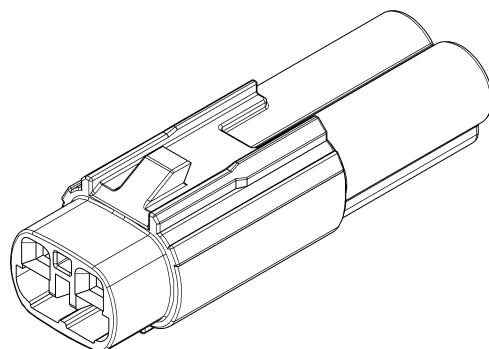

ISOMETRIC VIEW

注記

1. かん合相手品番 : 7297-5020-30 ETC.
2. 適用端子品番 : 7116-4415-02, 7116-4416-02, 7116-4417-02
3. 適用ゴム栓品番 : 7158-3165-90, 7158-3166-60, 7158-3167-80
7158-3168-80
4. 適用防水栓品番 : 7158-3169-40

NOTES

1. MATING PART NO. : 7297-5020-30 ETC.
2. APPLICABLE TERMINAL NO. : 7116-4415-02, 7116-4416-02, 7116-4417-02
3. APPLICABLE WIRE SEAL PART NO. : 7158-3165-90, 7158-3166-60, 7158-3167-80
7158-3168-80
4. APPLICABLE SEALING PLUG PART NO. : 7158-3169-40

B

B

A

A

GENERAL TOLERANCE											
	10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±2.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4					±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2					±3°	0.15

								CUSTOMER					MATL. SPEC.			SEE TABLE		TREAT. & FIN.	
△	2021/02/10	CHANGED FORM, ETC. . [A]			C21-Y049	Y. M	CUSTOMER PART NO.					NAME HS 025 2P SEALED HOUSING FEMALE							
	2020/06/30	NEW			C20-X077	T. H	CUSTOMER DWG NO.												
LET	DATE	REVISION RECORD			NO.	CHKD	OFFICE			TRIAL PART NO. or PRODUCT NO.			----- -----						
						VENDOR			△										
GENERAL TOLERANCE							VENDOR NO.												
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE	PART NO.					
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.5°	0.1	R	NEW	2020/06/30	mm	5:1	3	7198-5019-30 ETC.					
B	±0.2	±0.3	±0.55	±0.95	±1.4	±1.0°	0.1	APPROVED	CHECKED	CHECKED	DESIGN	DRAWN		CH. CODE					
C	±0.3	±0.5	±0.8	±1.4	±2	±1.5°	0.15								DWG NO.				
SPECIFIED						MASS		T. MURO		—		T. FUKAYA		Y. MAEDA		SET DWG NO.			
						(0.5) g		2021/02/10		—		2020/06/24		2021/02/10					
YAZAKI Corporation																			