

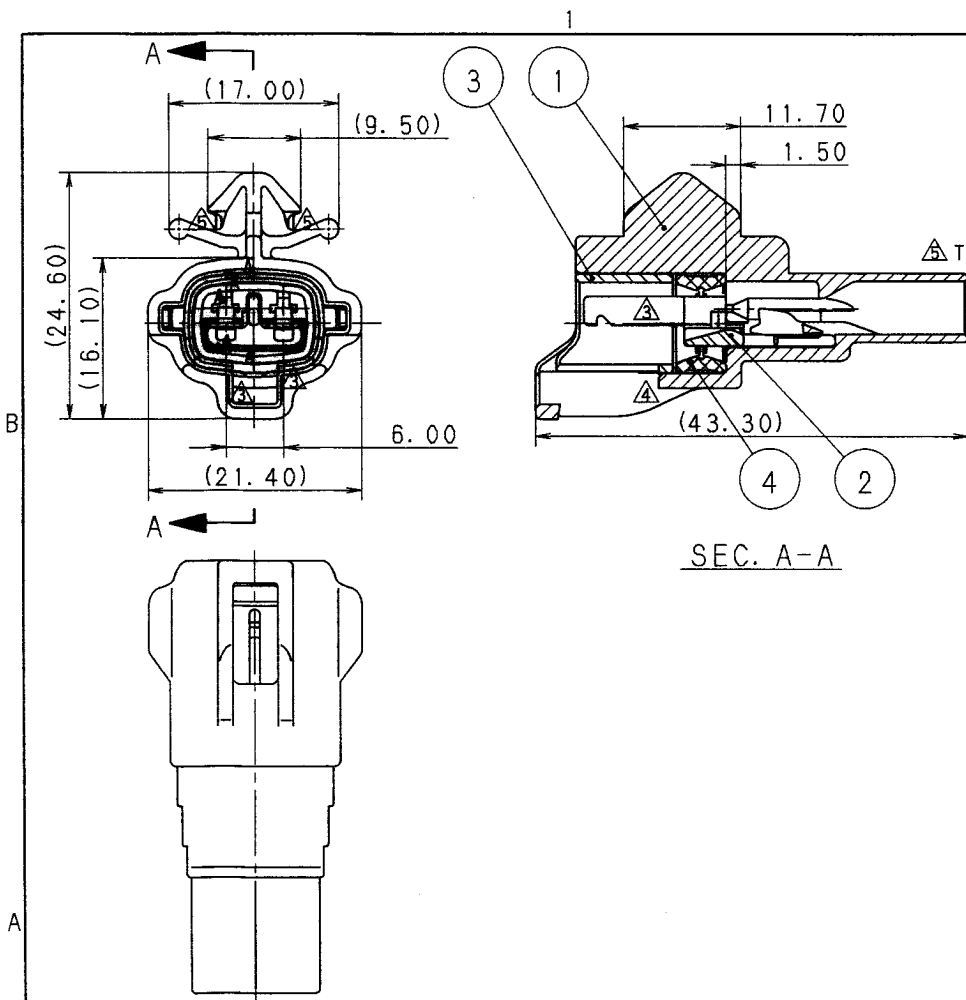


TABLE 1		3			
SUB ASSEMBLY PART NO. AND CH. CODE	NO.	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
△ 7282-7029-40 ETC.	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	7157-4349	PBT	NATURAL	1
	③	SEE TABLE 2	PBT	SEE TABLE 2	1
	④	7137-2245-30	NBR	BLACK	1

TABLE 2		3		
SUB ASSEMBLY PART NO. AND CH. CODE	HOUSING PART NO. AND CH. CODE	PACKING HOLDER NO. AND CH. CODE	COLOR	
△ 7282-7029. 固	7182-7029	7157-4227	NATURAL	
△ 7282-7029-10. 固	7182-7029-10	7157-4227-10	DARK GARY	
△ 7282-7029-30. 固	7182-7029-30	7157-4227-30	BLACK	
7282-7029-40. 固	7182-7029-40	7157-4227-40	LIGHT GRAY	
△ 7282-7029-50. 固	7182-7029-50	7157-4227-50	ORANGE	

注記

1. 適用ターミナル品番 : 090Ⅱ 7114-4025 ETC.

2. 嵌合相手品番 : 7283-7029-40 ETC.

△ 3. 適用ゴム栓品番 : 7158-3006-90 ETC.

4. 適用パネル: パネル穴径 7.0 × 12.0

板厚 t=0.6~1.4

NOTES

1. APPLICABLE TERMINAL NO. : 090Ⅱ 7114-4025 ETC.

2. MATING PART NO. : 7283-7029-40 ETC.

△ 3. APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

4. APPLICABLE PANEL: PANEL HOLE DIA 7.0 × 12.0

PANEL THICKNESS: 0.6~1.4

△	00.03.21	CHANGED FORM & ELIMINATED PART NO. 固	C00-L388	H. T
△	98.02.26	CHANGED FORM	C98-L327	Y. M
△	98.02.04	CHANGED FORM & ADDED PART NO. 固	C98-L146	H. J
△	91.04.10	ADDED PART NO.	C91-6570	Y. G
△	90.08.18	ADDED PART NO.	C90-L917	M. H
△	89.09.13	NEW	C89-L964	M. T
LET	DATE	REVISION RECORD	NO.	CHKD

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	250MAX	250QVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15
SPECIFIED				MASS			

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.	
OFFICE		TRIAL PART NO.			
VENDOR		VENDOR NO.			
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	89.09.20	mm	△ 2/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
加藤	山梨	福岡	M. FUKUDA	A. NAKAO	
00.03.29	00.03.28	00.03.23	89.02.20	00.03.21	

MATL. SPEC.	SEE TABLE 1	TREAT. & FIN.	
NAME 090Ⅱ 2P SEALED CONNECTOR HOUSING ----- MALE SUB ASSEMBLY (CLAMP TYPE)			
PART NO. 7282-7029-40 ETC. CH. CODE			
DWG NO.		△7282-7029:R	SET DWG NO.
YAZAKI CORPORATION			