
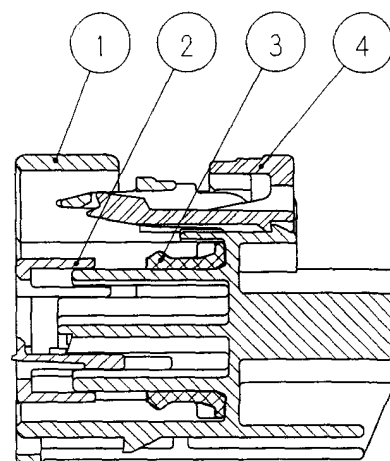
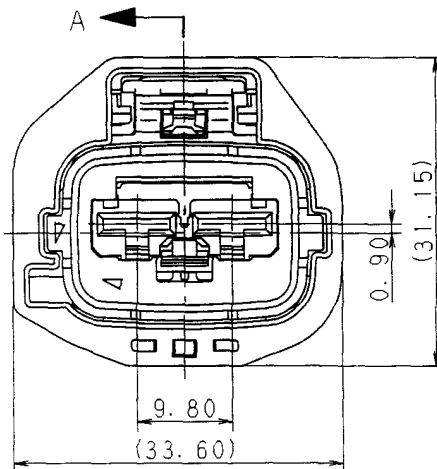


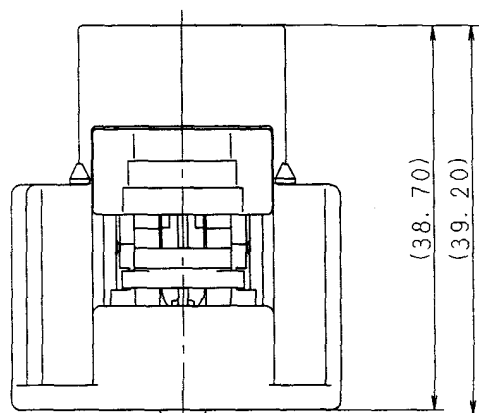

SEC. A-A

| QTY.                                                                | NO. | PART NO.<br>AND CH. CODE | MATERIAL        | COLOR        |
|---------------------------------------------------------------------|-----|--------------------------|-----------------|--------------|
| 1                                                                   | 1   | ① 7183-5596-10           | HPA             | DARK GRAY    |
| 1                                                                   | 1   | ② 7158-4219              | HPA             | NATURAL      |
| 1                                                                   | 1   | ③ 7137-2741-70           | SILICONE RUBBER | MAIZE YELLOW |
| 1                                                                   | 1   | ④ 7158-7080-50           | HPA             | RED          |
| 7283-5928-10<br>7283-5596-10<br>SUB ASSEMBLY<br>PART NO. & CH. CODE |     |                          |                 |              |

注記

1. 嵌合相手品番 : 7282-5596-10
2. 適用端子品番 : 7116-4140-02 ETC.
3. 適用ゴム栓品番 : 7158-3081-50 ETC.
4. 適用防水栓品番 : 7158-3080-60

NOTES

1. MATING PART NO. : 7282-5596-10
2. APPLICABLE TERMINAL PART NO. : 7116-4140-02 ETC.
3. APPLICABLE WIRE SEAL NO. : 7158-3081-50 ETC.
4. APPLICABLE DUMMY PLUG NO. : 7158-3080-60

ISSUE MARK

|                   |  |  |  |  |                              |  |  |  |  |                    |  |  |  |  |               |  |  |  |  |
|-------------------|--|--|--|--|------------------------------|--|--|--|--|--------------------|--|--|--|--|---------------|--|--|--|--|
|                   |  |  |  |  | CUSTOMER                     |  |  |  |  | MATERIAL SPEC.     |  |  |  |  | TREAT. & FIN. |  |  |  |  |
|                   |  |  |  |  | CUSTOMER PART NO.            |  |  |  |  | CUSTOMER DWG NO.   |  |  |  |  |               |  |  |  |  |
| △ 99.11.18        |  |  |  |  | ADDED PART NO. ETC. C99-M658 |  |  |  |  | M. K               |  |  |  |  |               |  |  |  |  |
| 97.05.06          |  |  |  |  | NEW C97-L785                 |  |  |  |  | H. K               |  |  |  |  |               |  |  |  |  |
| LET               |  |  |  |  | DATE                         |  |  |  |  | REVISION RECORD    |  |  |  |  | NO. CHKD      |  |  |  |  |
| GENERAL TOLERANCE |  |  |  |  |                              |  |  |  |  | VENDOR NO.         |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  | 10MAX                        |  |  |  |  | 50MAX              |  |  |  |  | 100MAX        |  |  |  |  |
|                   |  |  |  |  | 250MAX                       |  |  |  |  | 2500VR             |  |  |  |  | ANGLE         |  |  |  |  |
|                   |  |  |  |  | ECCENT                       |  |  |  |  | DWG TYPE           |  |  |  |  | DWG SOURCE    |  |  |  |  |
|                   |  |  |  |  | R                            |  |  |  |  | NEW                |  |  |  |  | 97.05.06      |  |  |  |  |
|                   |  |  |  |  | mm                           |  |  |  |  | 2/1                |  |  |  |  | 3             |  |  |  |  |
| A                 |  |  |  |  | ±0.15                        |  |  |  |  | ±0.2               |  |  |  |  | ±0.3          |  |  |  |  |
|                   |  |  |  |  | ±0.5                         |  |  |  |  | ±0.75              |  |  |  |  | ±30'          |  |  |  |  |
|                   |  |  |  |  | 0.1                          |  |  |  |  | APPROVED           |  |  |  |  | CHECKED       |  |  |  |  |
|                   |  |  |  |  | CHECKED                      |  |  |  |  | DESIGN             |  |  |  |  | DRAWN         |  |  |  |  |
| B                 |  |  |  |  | ±0.2                         |  |  |  |  | ±0.3               |  |  |  |  | ±0.55         |  |  |  |  |
|                   |  |  |  |  | ±0.95                        |  |  |  |  | ±1.4               |  |  |  |  | ±30'          |  |  |  |  |
|                   |  |  |  |  | 0.1                          |  |  |  |  | 99.11.23           |  |  |  |  | 99.11.23      |  |  |  |  |
|                   |  |  |  |  | 99.11.22                     |  |  |  |  | 97.03.28           |  |  |  |  | 99.11.18      |  |  |  |  |
| (C)               |  |  |  |  | ±0.3                         |  |  |  |  | ±0.5               |  |  |  |  | ±0.8          |  |  |  |  |
|                   |  |  |  |  | ±1.4                         |  |  |  |  | ±2                 |  |  |  |  | ±30'          |  |  |  |  |
|                   |  |  |  |  | 0.15                         |  |  |  |  | YAMANE             |  |  |  |  | T. YAMANE     |  |  |  |  |
| SPECIFIED         |  |  |  |  |                              |  |  |  |  | MASS               |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | 9                  |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | 199.11.23          |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | 99.11.22           |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | 97.03.28           |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | 99.11.18           |  |  |  |  |               |  |  |  |  |
|                   |  |  |  |  |                              |  |  |  |  | YAZAKI CORPORATION |  |  |  |  |               |  |  |  |  |