



TABLE 1

YAZAKI SUB ASS'Y NO.	NO.	YAZAKI PART NO.	MATERIAL	COLOR	QTY.
7283-7029-40 ETC.	①	SEE TABLE 2	PBT	SEE TABLE 2	1
	②	7157-4352	PBT	NATURAL	1

TABLE 2

SUB ASS'Y NO.	HOUSING NO.	COLOR
7283-7029	7183-7029	NATURAL
7283-7029-10	7183-7029-10	DARK GRAY
7283-7029-30	7183-7029-30	BLACK
7283-7029-40	7183-7029-40	LIGHT GRAY
7283-7029-50	7183-7029-50	ORANGE
7283-7029-60	7183-7029-60	GREEN
7283-7029-80	7183-7029-80	BROWN
7283-7029-90	7183-7029-90	BLUE

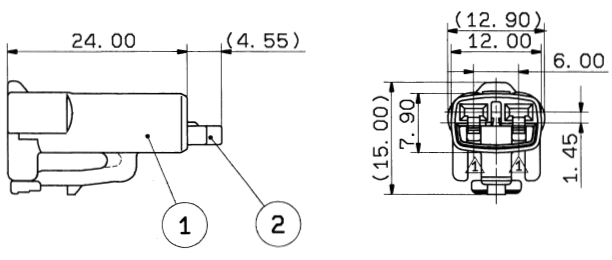

注

- 適合相手品番 : 7282-7029-40, 7282-7420-40.
- 適用端子品番 : 090 II 7116-4025 (AVS 0.3 ~ AVS 0.5)
7116-4026 (AVS 0.5 ~ AVS 1.25)
7116-4027 (AVSS 2)
- 適用口栓品番 : 7157-3648 (AVS 0.5 ~ AEX 1.25)

NOTES

- MATING PART NO. : 7282-7029-40, 7282-7420-40
- APPLICABLE TERMINAL NO.
: 090 II 7116-4025 (AVS 0.3 ~ AVS 0.5)
7116-4026 (AVS 0.5 ~ AVS 1.25)
7116-4027 (AVSS 2)
- APPLICABLE RUBBER STOPPER NO.
: 7157-3648 (AVS 0.5 ~ AEX 1.25)

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD	CUSTOMER	CUSTOMER PART NO.	CUSTOMER DWG NO.	MATL. SPEC.	TREAT. & FIN.
△	95.02.15	ADDED PART NO.	C95-L210	K. O	CUSTOMER			SEE TABLE 1	
△	90.08.18	ADDED PART NO.	C90-L917	M. H	CUSTOMER PART NO.				
△	90.04.18	CHANGED FORM	C90-L437	K. O	OFFICE				
	89.09.13	NEW	C89-L965	M. T	VENDOR	7F8923-6055			
GENERAL TOLERANCE					VENDOR NO.				
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE	DWG SOURCE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R	NEW
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED	CHECKED
C	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15		
SPECIFIED					MASS				
					95.02.02 85.02.01 75.02.01 89.01.16 95.02.15				

NAME 090 II 2P SEALED CONNECTOR HOUSING FEMALE SUB ASS'Y

PART NO. 7283-7029-40 ETC.

DWG NO. 7283-7029-30:R

YAZAKI CORPORATION