THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2018
© COPYRIGHT 2018 BY TE ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER E.O. P20392	03DEC2009		RDR
	F	REVISED PER PCN E-18-007949	23MAY2018	DD	DM
	G	REVISED PER PCN-24-210586	10JUN2024	PS	DM
	G1	REVISED PER PCN-25-234384	31JAN2025	RK	CB

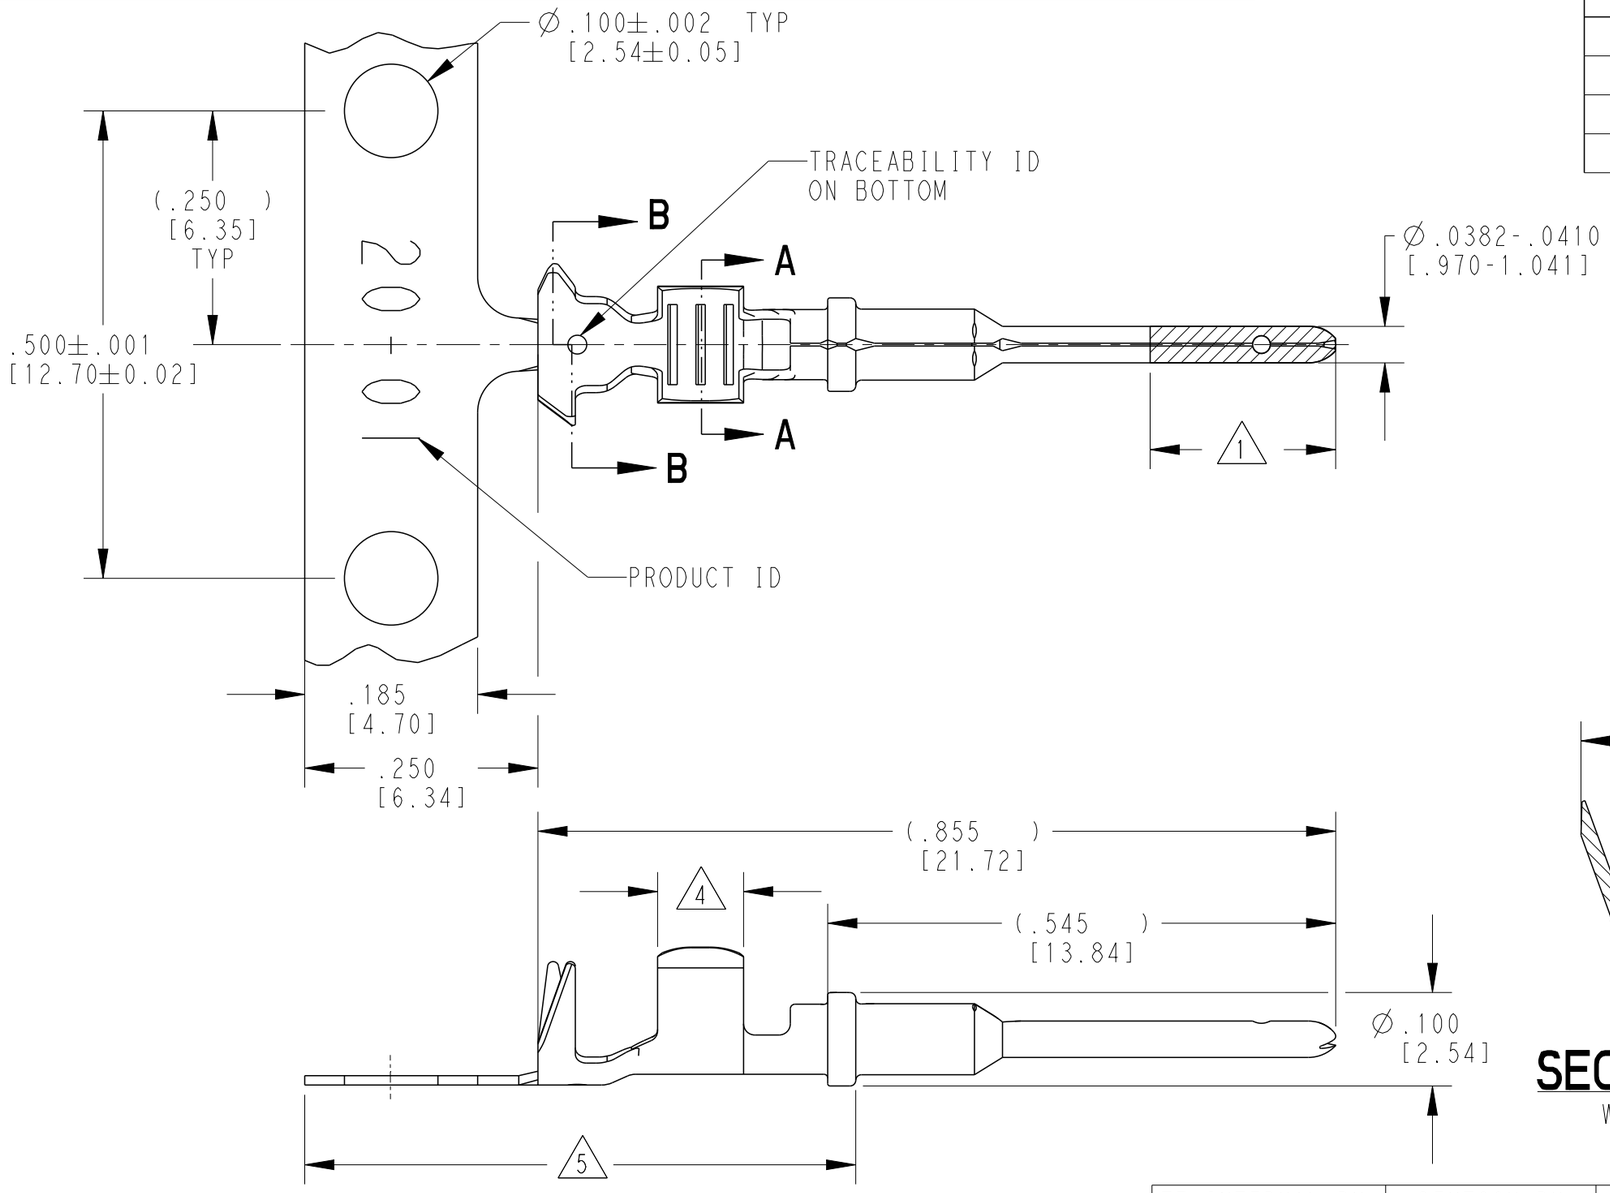

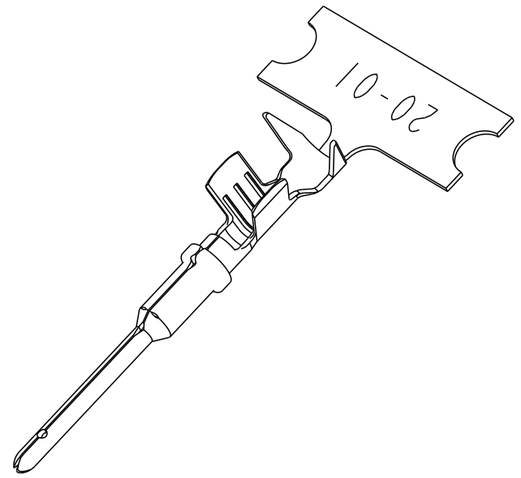

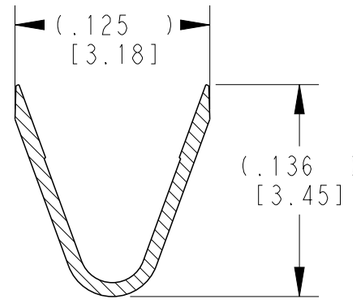

SECTION A-A
WIRE BARREL

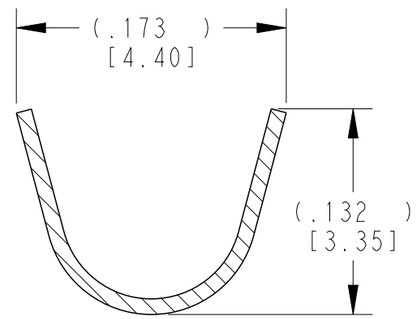

SECTION B-B
INSULATION BARREL

	TE INTERNAL PN	DEUTSCH PN	REV	PLATING
	1060-20-0122	1060-20-0122	L	Ni/Cu Overall
1	1060-20-0144	1060-20-0144	L	Selective Au, Ni/Cu Overall, Sn/Ni/Cu Wire Barrel
	1060-20-0177	1060-20-0177	L	Sn/Ni/Cu Overall

5 TIN PLATING MAY BE IN THIS REGION.

4 TIN PLATED REGION.

3 MATERIAL: .010 [0.25] THICK COPPER ALLOY.

2 WIRE RANGE: 22 AWG TO 16 AWG [0.35-1.50 mm²].
INSULATION RANGE: Ø.075-.125 [Ø1.91-3.18].

1 GOLD PLATED REGION.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±-

MATERIAL 3

FINISH SEE TABLE

DWN J. APOSTOL 01DEC2009
CHK D. MEYER 02DEC2009
APVD R. REED 03DEC2009
PRODUCT SPEC 108-151000
APPLICATION SPEC 114-151003
WEIGHT 0.16 g

TE Connectivity

NAME
PIN, STAMPED CONTACT
SIZE 20
16-22 AWG, .075-.125 INS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-1060-20-01XX	-

CUSTOMER DRAWING | SCALE 6:1 | SHEET 1 OF 1 | REV G1

1470-19 (3/13)