

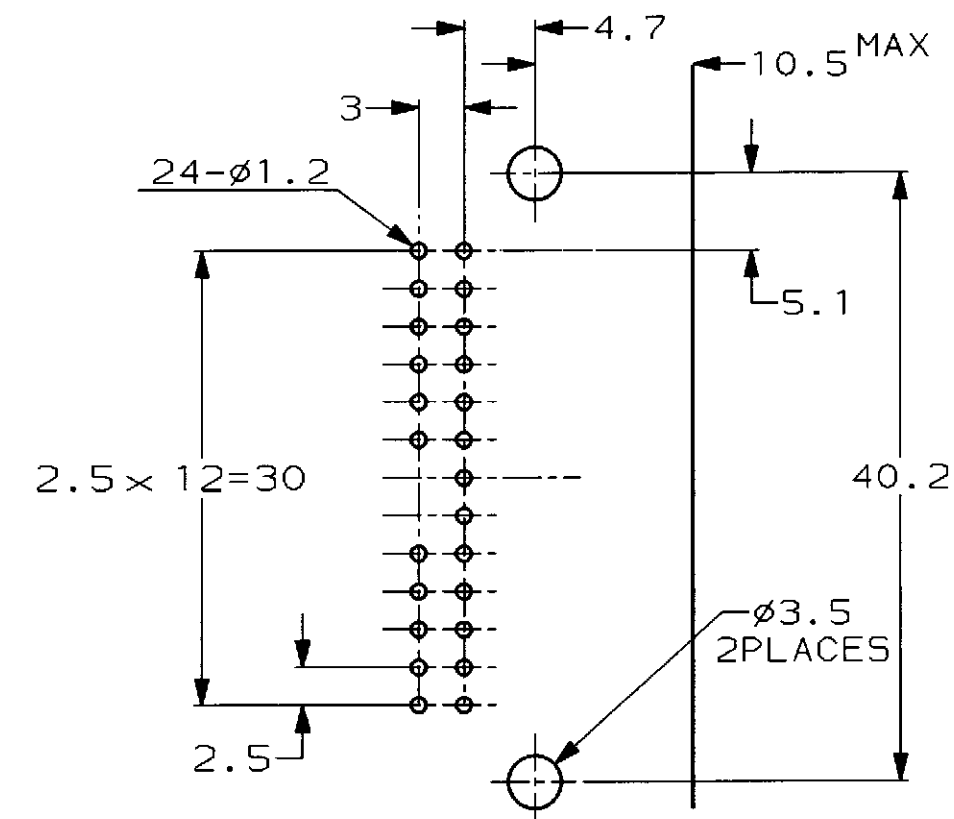
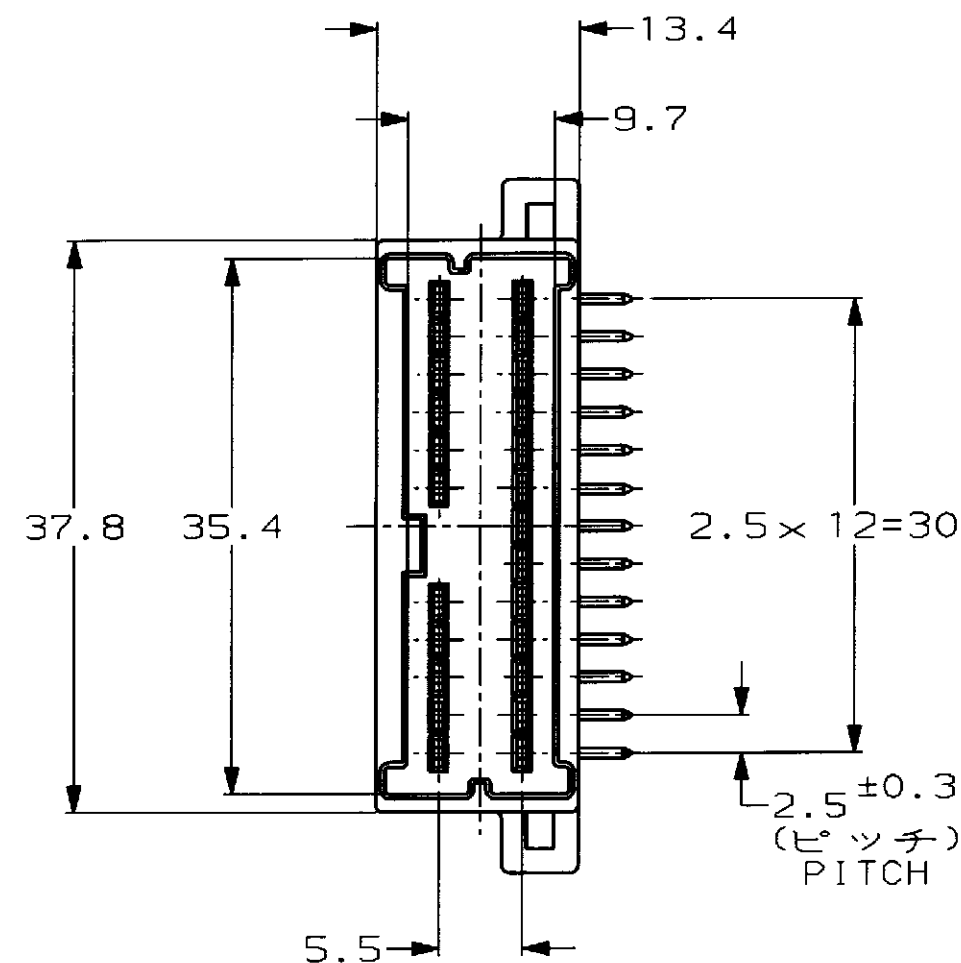


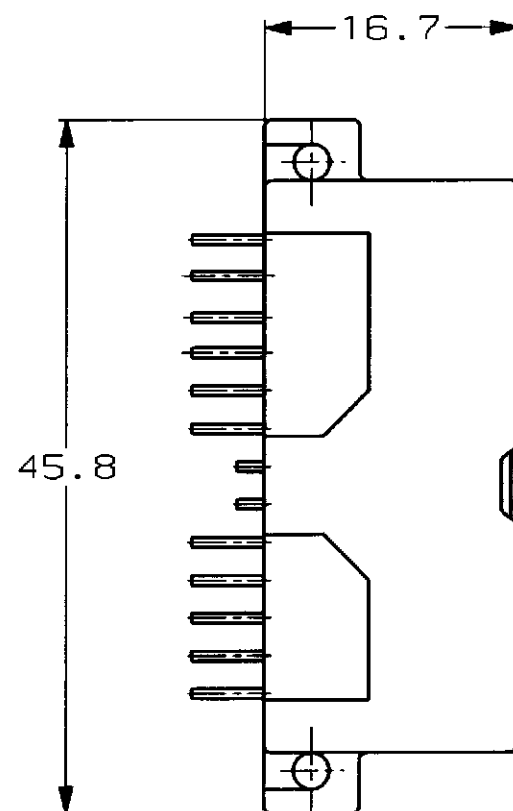

MOUNTING DIMENSIONS FOR P.C. BOARD
プリント基板取付け穴寸法

(TOLERANCES: ±0.1
PITCH TOLERANCES MUST NOT ACCUMULATE.)
(公差: ±0.1 ピッチ公差は累積されないこと)

P.C. BOARD THICKNESS
基板厚: 1.6mm

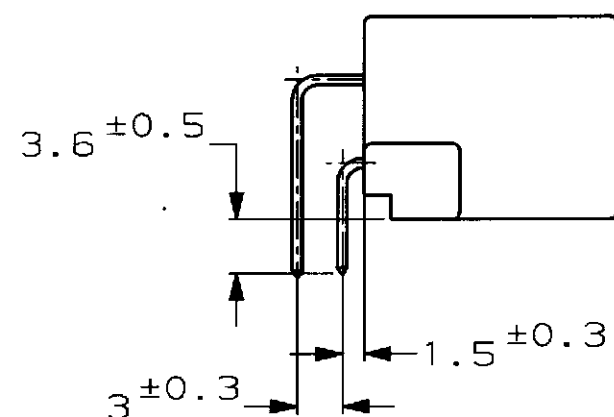

1 RECOMMENDED MOUNTING SCREW: PAN-HEADED, TYPE 2 TAPPING SCREW OF 3DIA X 6LENGTH (JIS B1115, B1122), TIGHTENING TORQUE: 39.2N-cm [4Kg-cm] MAX

1 推奨取付ネジ: JIS B1115, B1122タッピングねじ, なべ2種, 呼び径3, 長さ6, 締付トルク: 39.2N-cm [4Kg-cm] 以下

1123387-1	自然色 (NATURAL)	1123431-1
嵌合相手ハウジング型番 MATING HOUSING PART NUMBER	色 (COLOR)	型番 PART NUMBER
AMP 日本エー・エム・ジー株式会社 Kawasaki, Japan		
NAME 040III MULTILOCK CONNECTOR 24POS CAP HOUSING ASSEMBLY WIRE TO BOARD (H) TYPE 名称 040III マルチロック コネクタ 24極 水平型 キャップハウジング アッセンブリ (対基板用)		
PRODUCT SPEC 108-5603		
APPLICATION SPEC		
WEIGHT 6.3g		
SIZE A3 CAGE CODE 00779 DRAWING NO. 1123431		
CUSTOMER DRAWING		
SCALE 2:1 SHEET 1 OF 1 REV B		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	
DIMENSIONS: 単位: 概 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED
	一般公差 10mm: ±0.2 30mm: ±0.25 100mm: ±0.3 ANGLE: ±0.3°
MATERIAL 材料	FINISH 仕上
PBT	