



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
A		ECO-17-009760	04JUL2017	PV	AP

a) Part as supplied.

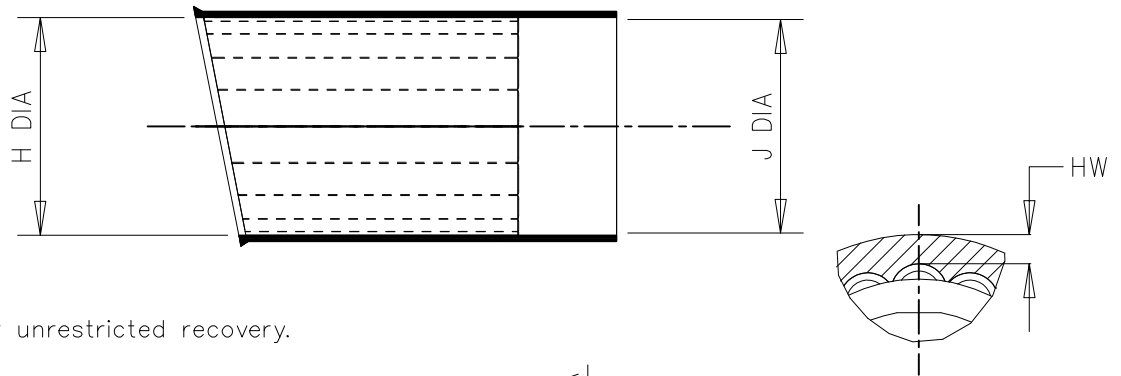

b) Part after unrestricted recovery.

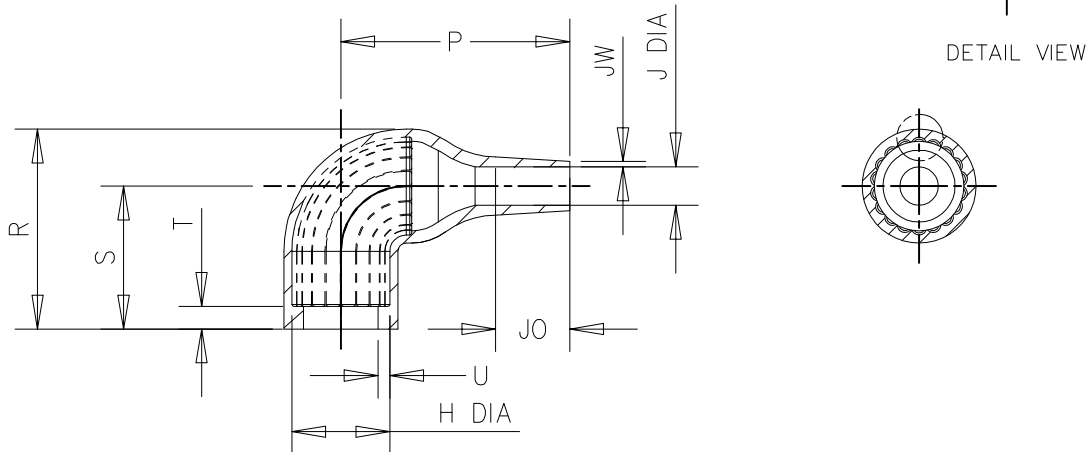

Part No.	H		J		P	R	S	T	U	JO	HW	JW
	Min a	Max b	Min a	Max b	±10% b	±10% b	±10% b	±10% b	±10% b	±10% b	±20% b	±20% b
222K121-25L-0	24 [.94]	10.4 [.41]	24 [.94]	5.6 [.22]	25 [.98]	25 [.98]	19 [.75]	3.0 [.12]	1.0 [.04]	8.5 [.33]	1.3 [.05]	0.5 [.02]
222K132-25L-0	30 [1.18]	14.2 [.56]	30 [1.18]	5.9 [.23]	32 [1.26]	27 [1.06]	20 [.79]	3.0 [.12]	1.0 [.04]	8.5 [.33]	1.3 [.05]	0.8 [.03]
222K142-25L-0	31 [1.22]	18.0 [.71]	31 [1.22]	7.1 [.28]	39 [1.54]	31 [1.22]	21 [.83]	3.0 [.12]	1.0 [.04]	15.0 [.59]	1.2 [.04]	1.0 [.04]
222K152-25L-0	36 [1.42]	22.4 [.88]	36 [1.42]	8.4 [.33]	46 [1.81]	38 [1.50]	26 [1.02]	3.0 [.12]	1.0 [.04]	16.0 [.63]	1.5 [.06]	1.0 [.04]
222K163-25L-0	43 [1.69]	28.2 [1.11]	43 [1.69]	9.9 [.39]	55 [2.17]	45 [1.77]	30 [1.18]	3.0 [.12]	1.7 [.07]	17.5 [.69]	2.0 [.08]	1.0 [.04]
222K174-25L-0	60 [2.36]	35.1 [1.38]	60 [2.36]	15.7 [.62]	80 [3.15]	54 [2.13]	35 [1.38]	3.0 [.12]	1.7 [.07]	32.0 [1.26]	2.3 [.09]	1.5 [.06]
222K185-25L-0	66 [2.60]	44.5 [1.75]	66 [2.60]	16.8 [.66]	108 [4.25]	68 [2.68]	42 [1.65]	3.0 [.12]	2.0 [.08]	48.0 [1.89]	1.8 [.07]	2.0 [.08]

DIMENSIONS:
mm [INCHES]

DWN P. VU 04JUL2017

MATERIAL -25L

FINISH -

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

CHK N. NAGAR 04JUL2017

APVD A. POOLE 04JUL2017

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE

TE Connectivity

NAME

BOOT, 90 DEGREE
WITH LIP

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A4

00779

C-222K1XX-25L-0

-


SCALE

DNS

SHEET

1 OF 2

REV A



COMPATIBILITY CHART			
Material Dash No.	Material Description	SPEC No.	Coating Slash No.
-25L	LIGHT WEIGHT POLYMER, FLUID RESISTANT	RW-3040	/225


Base part number

Material dash number
(See Compatability Chart)

Adhesive slash number _____
(If required see Compatability Chart)

NOTES

1. As supplied dimensions are for parts without adhesive, when an adhesive layer is added entry diameters will reduce by 1.5mm Max.
2. Parts will have a bump or depression on the inner surface at the material injection point.
3. Dimensions appearing in table are as follows –
 - a – As supplied
 - b – After unrestricted Recovery

DIMENSIONS: mm [INCHES]		DWN P. VU	04JUL2017	MATERIAL -25L		FINISH -		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK N. NAGAR	04JUL2017	TE Connectivity				
		APVD A. POOLE	04JUL2017					
		PRODUCT SPEC —		NAME BOOT, 90 DEGREE WITH LIP				
		APPLICATION SPEC —						
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT —		SIZE A4	CAGE CODE 00779	DRAWING NO C-222K1XX-25L-0	RESTRICTED TO —	
		CUSTOMER DRAWING				SCALE DNS	SHEET 2 of 2	REV A