


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	REVISED PER ECN-22-150900	27APR2022	RK	CSD



AMP WIRE RANGE	 E13288 Listed
4 AWG SOLID OR STRANDED	4 AWG STRANDED


 LR7189 Certified
4 AWG SOLID OR STRANDED

 STAMP AMP 4W* APPROX AS SHOWN

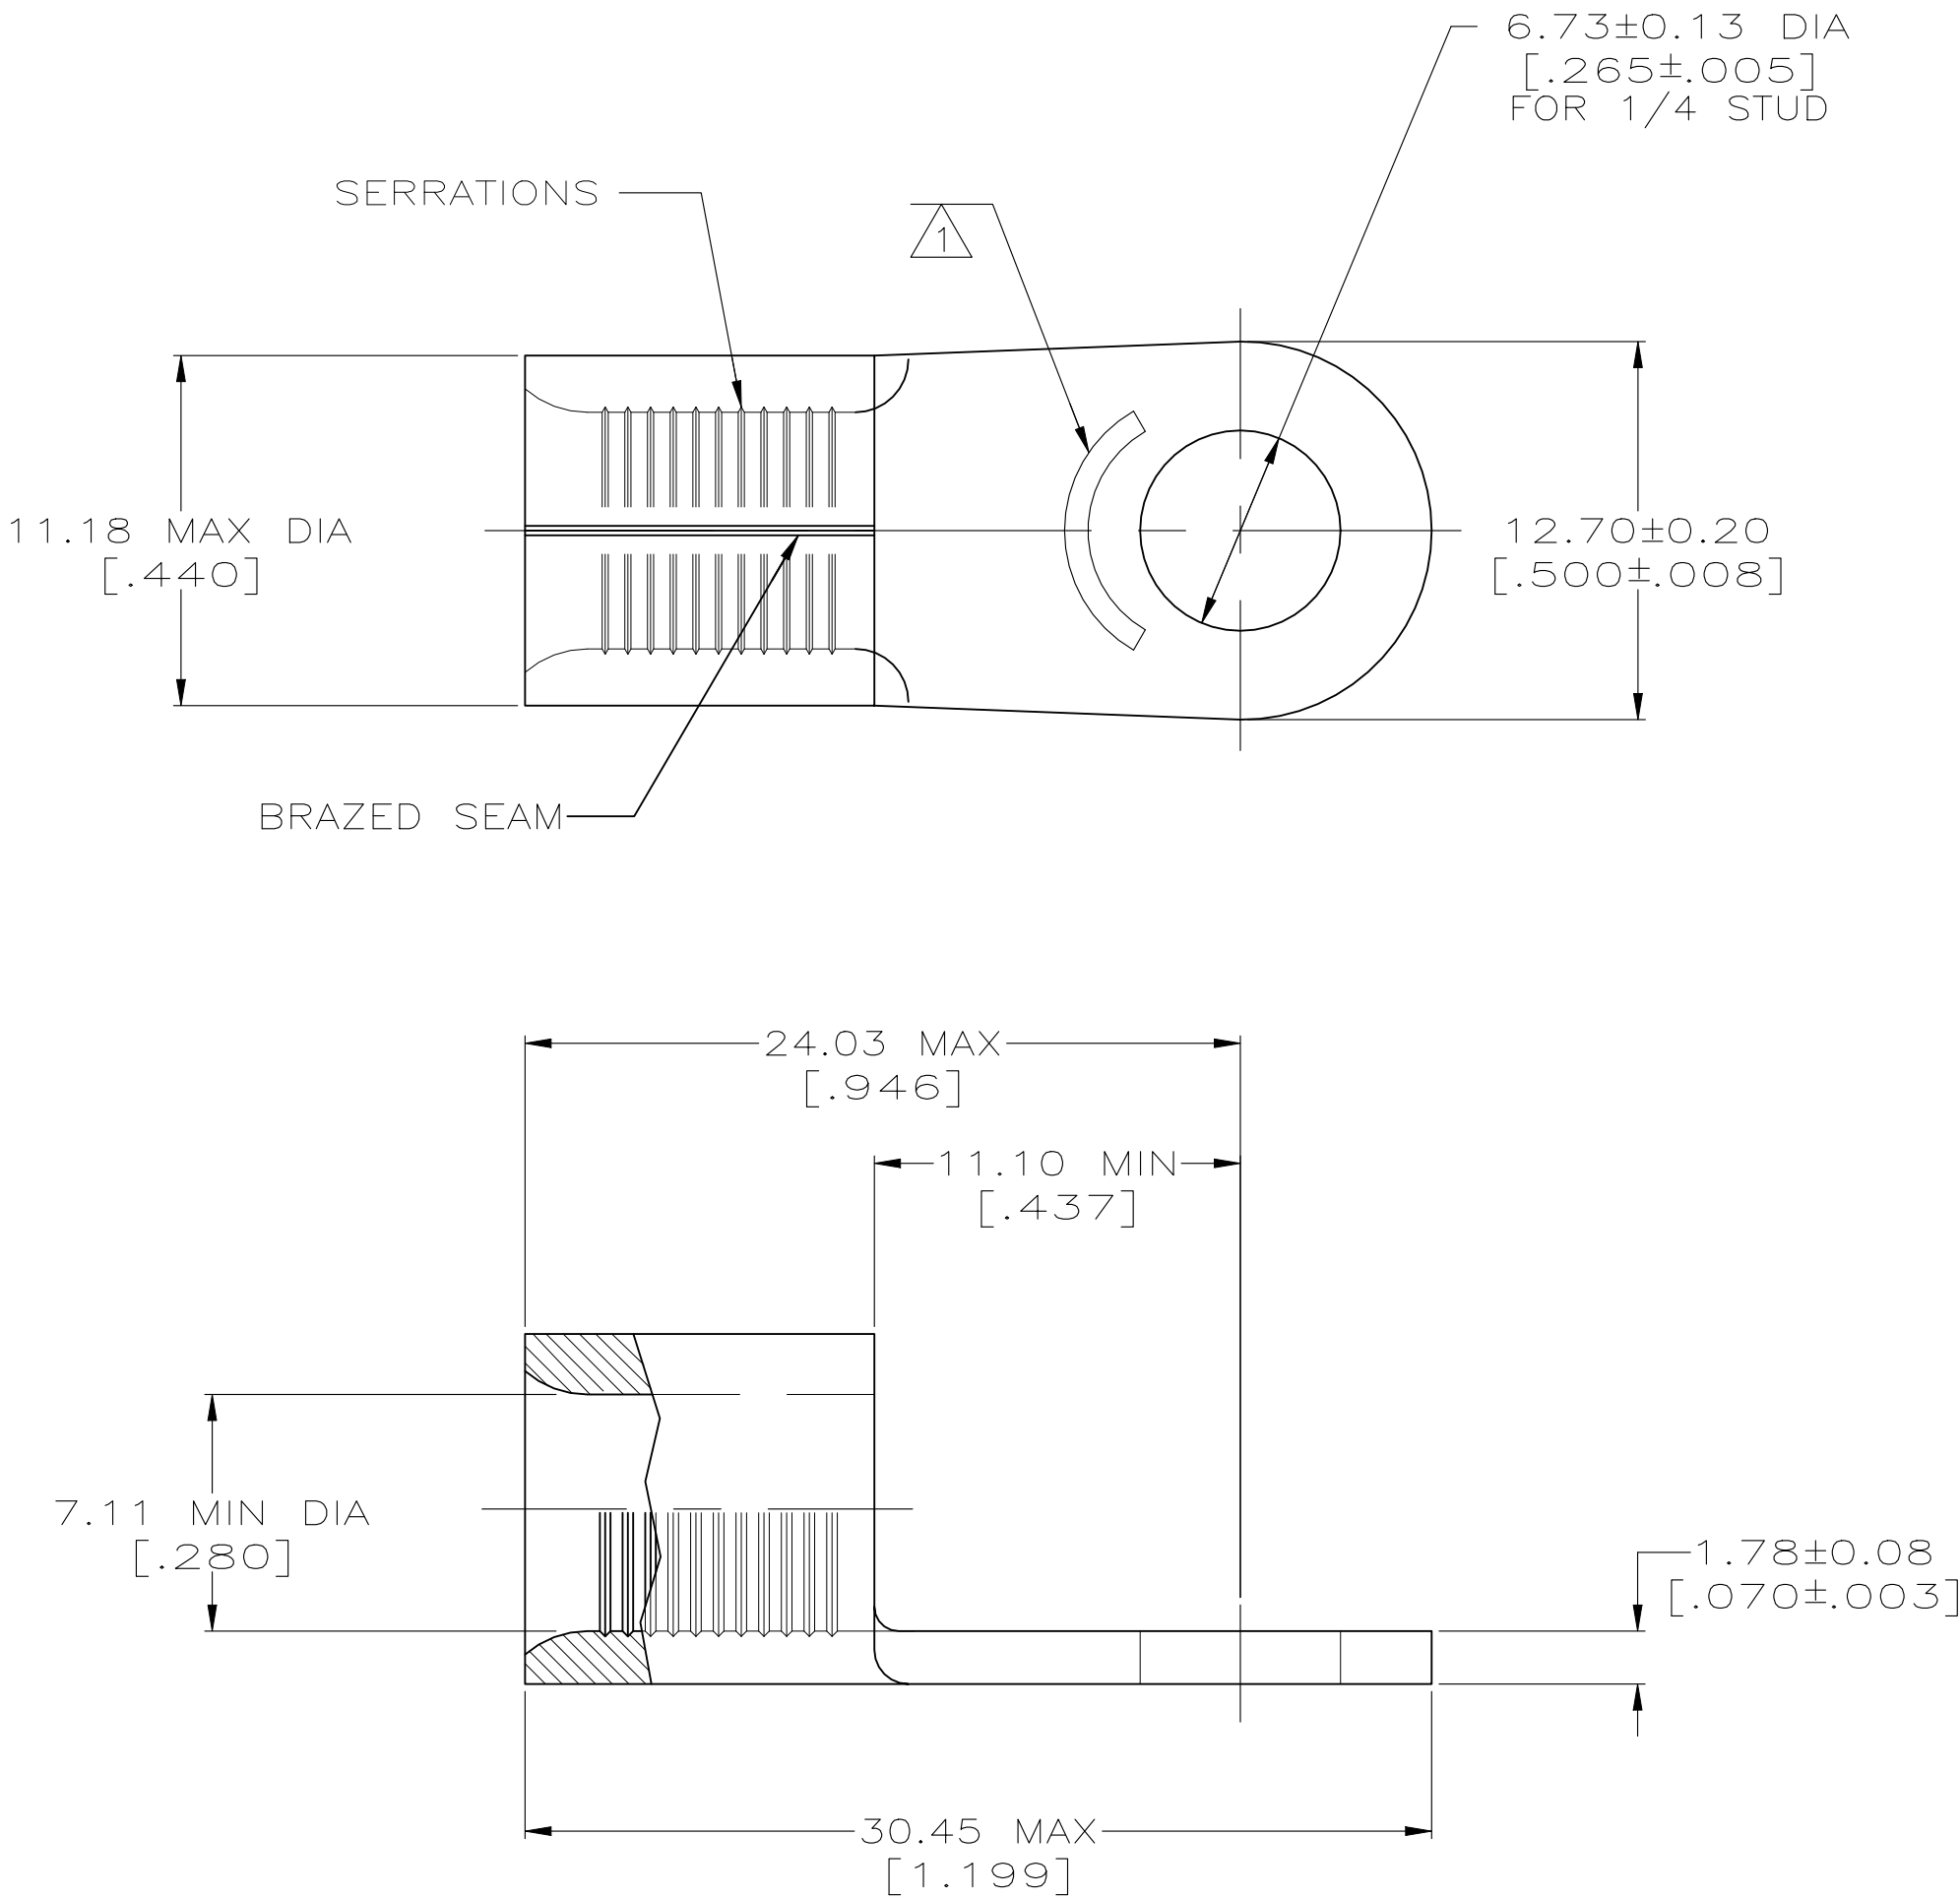

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
		WIRE CROSS SECTIONAL AREA RANGE: 16.8-26.7mm ² [33,100-52,600] CIR MILS SOLID OR STRANDED
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.
FOR ORDER ENTRY	1-800-526-5142	

500	ON TAPE, REEL	2-31811-5
500	LOOSE PIECE, BOX	2-31811-3
-	LOOSE PIECE	31811
QYT	PACKAGING TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN 3-29-93		 TE Connectivity							
DIMENSIONS: mm[INCHES]		CHK DA PATTERSON 3-29-93									
	TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD DE MILLER 3-29-93		NAME TERMINAL, RING TONGUE, SOLISTRAND TM						
	0 PLC ± -		PRODUCT SPEC								
	1 PLC ± -		—								
	2 PLC ± -		APPLICATION SPEC								
3 PLC ± -		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
4 PLC ± -		—									
MATERIAL		FINISH		WEIGHT		A2		00779		C-31811	
COPPER PER ASTM B-152 ANNEALED		TIN PLATE 0.0025(0.00100) MIN THK PER MIL-T-10727		—		—		—		—	
CUSTOMER DRAWING						SCALE		4:1		SHEET	
								1 of 1		REV	
										H2	