


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G6	REVISED PER ECN-22-150900	27APR2022	RK	CSD

D

C


B

A

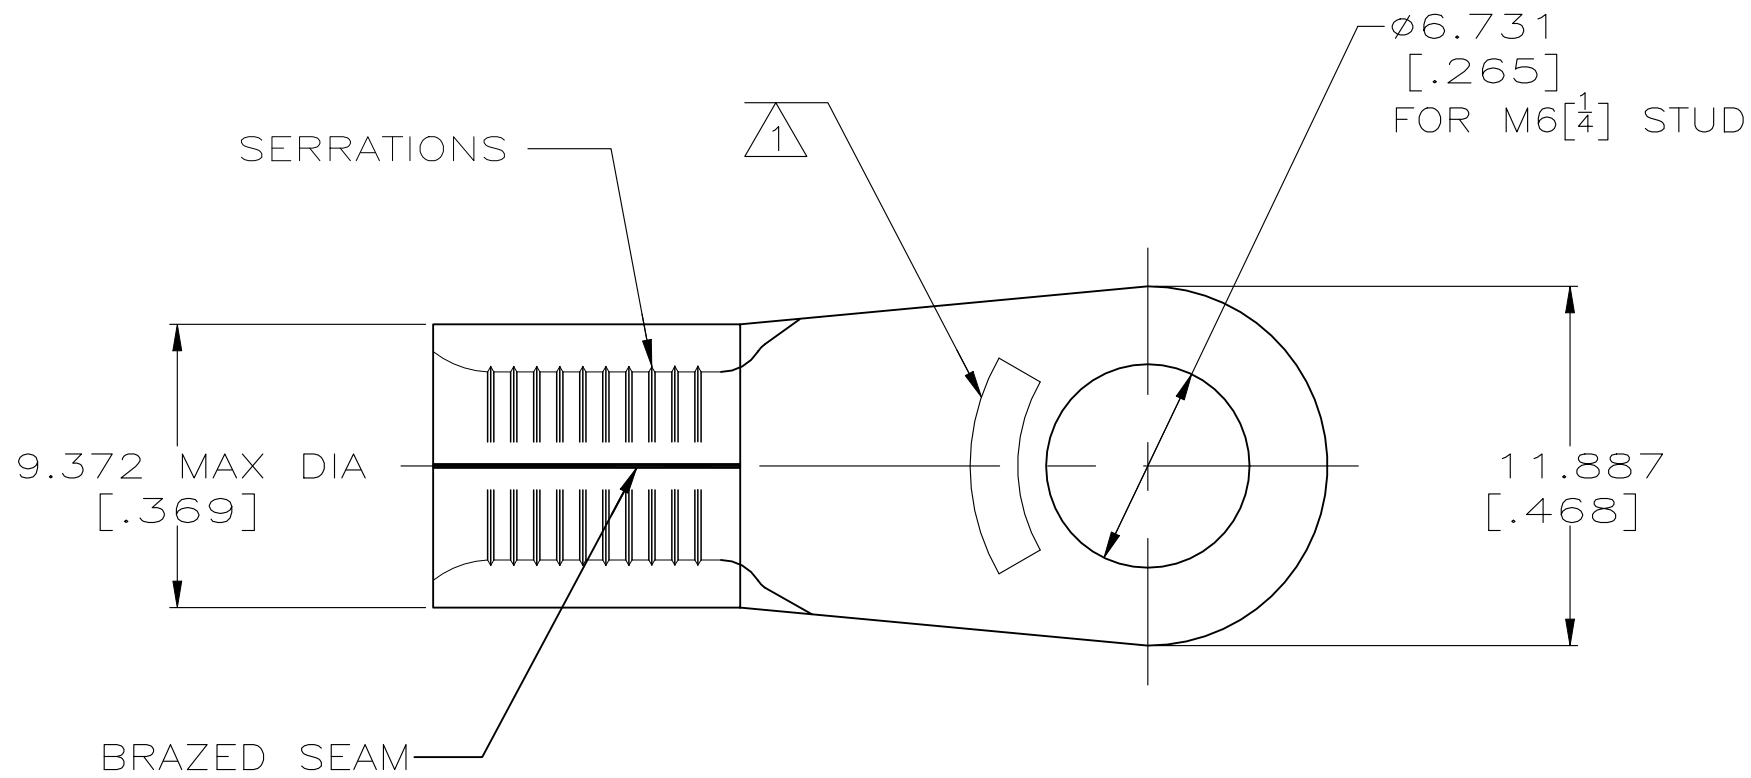

WIRE RANGE	Listed FILE E13288	Certified
6 AWG SOLID OR STRANDED	6 AWG STRANDED	6 AWG SOLID OR STRANDED

- 1 STAMP AMP 6* APPROX AS SHOWN
- 2 NOTE DELTED.
- 3 COPPER PER ASTM B-152, ANNEALED
- 4 NOTE DELETED
- 5 UL 486 A-B

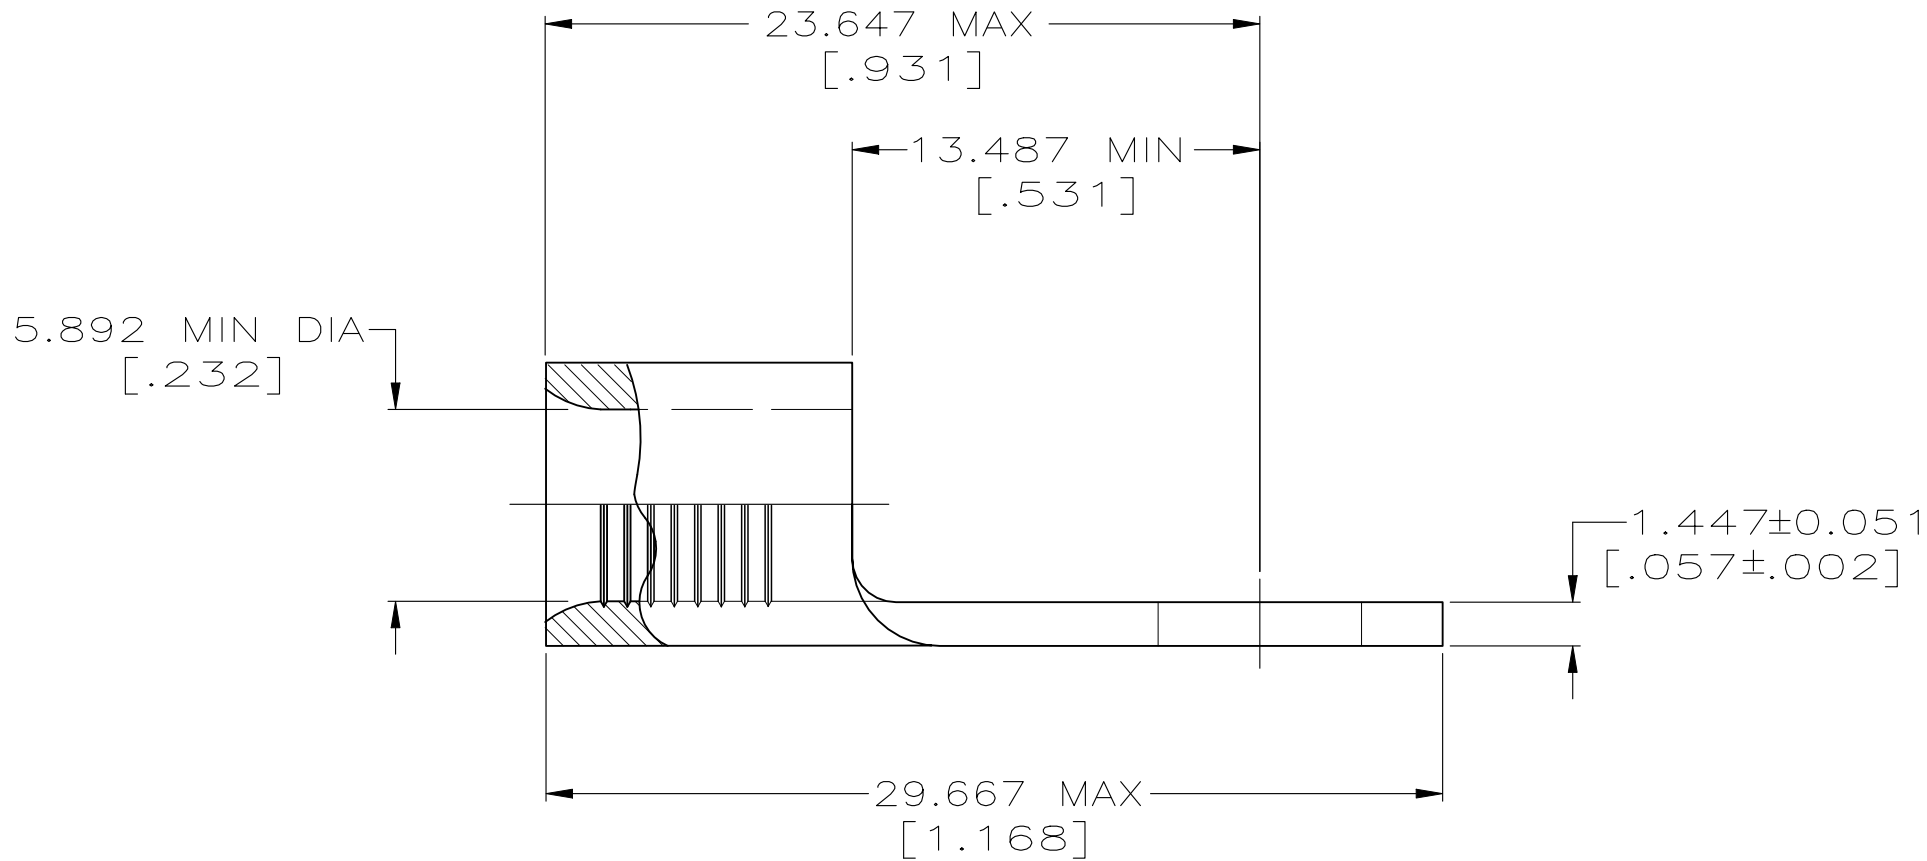

1000	LOOSE PIECE	170°C [338°F]	TIN PLATE 0.00254[.000100] MIN THK PER PER ASTM B545	2-321598-4
750	ON TAPE	170°C [338°F]	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	2-321598-3
100	LOOSE PIECE	170°C [338°F]	TIN PLATE 0.00254[.000100] MIN THK PER ASTM B545	321598
QTY.	PACKAGE TYPE	OPERATING TEMP, MAX	FINISH	PART NO.

CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN TA BRINKMAN 3-24-93 CHK DA PATTERSON 3-24-93 APVD JL MECKLEY 3-24-93 PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING				TE Connectivity NAME TERMINAL, RING TONGUE, SOLISTRAND 6 AWG SIZE A2 CAGE CODE 00779 DRAWING NO C-321598 RESTRICTED TO SCALE 4:1 SHEET 1 OF 1 REV G6			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	RECOMMENDED OPERATING TEMPERATURE: SEE TABLE	DIMENSIONS: MM[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .127[.005] 4 PLC ± - ANGLES ± -	FINISH SEE TABLE								
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: NOT APPLICABLE											
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE: 10.5-16.8mm² [20,800-33,100] CIR MILS SOLID OR STRANDED											