

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E3	REVISED PER ECO-11-005027	11MAR11	RK	HMR
	E4	REVISED PER ECO-17-008808	05MAR2018	RS	DR

 WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED	12-10 AWG SOLID OR STRANDED



- 1

STAMP AMP 12-10* APPROX AS SHOWN
- 2


MATERIAL: COPPER PER ASTM B-152, ANNEALED
- 3

TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B-545.
- 4

NOTE DELETED

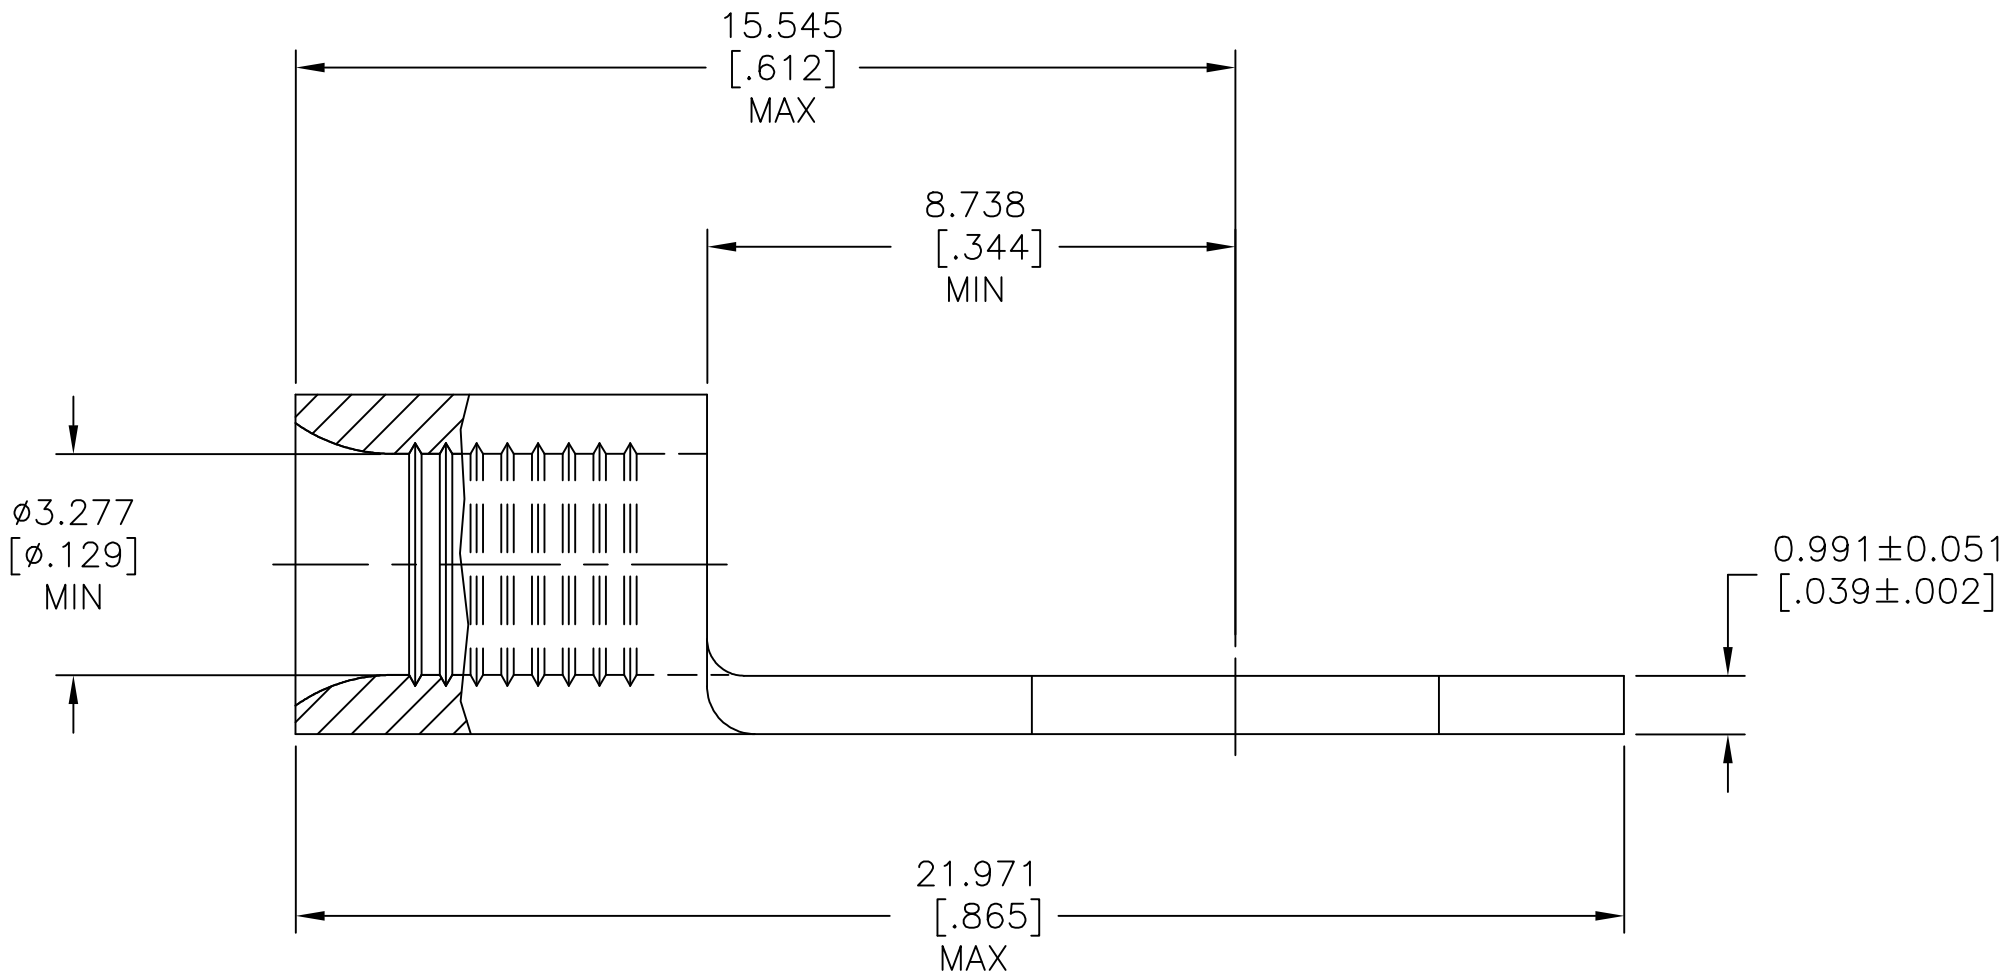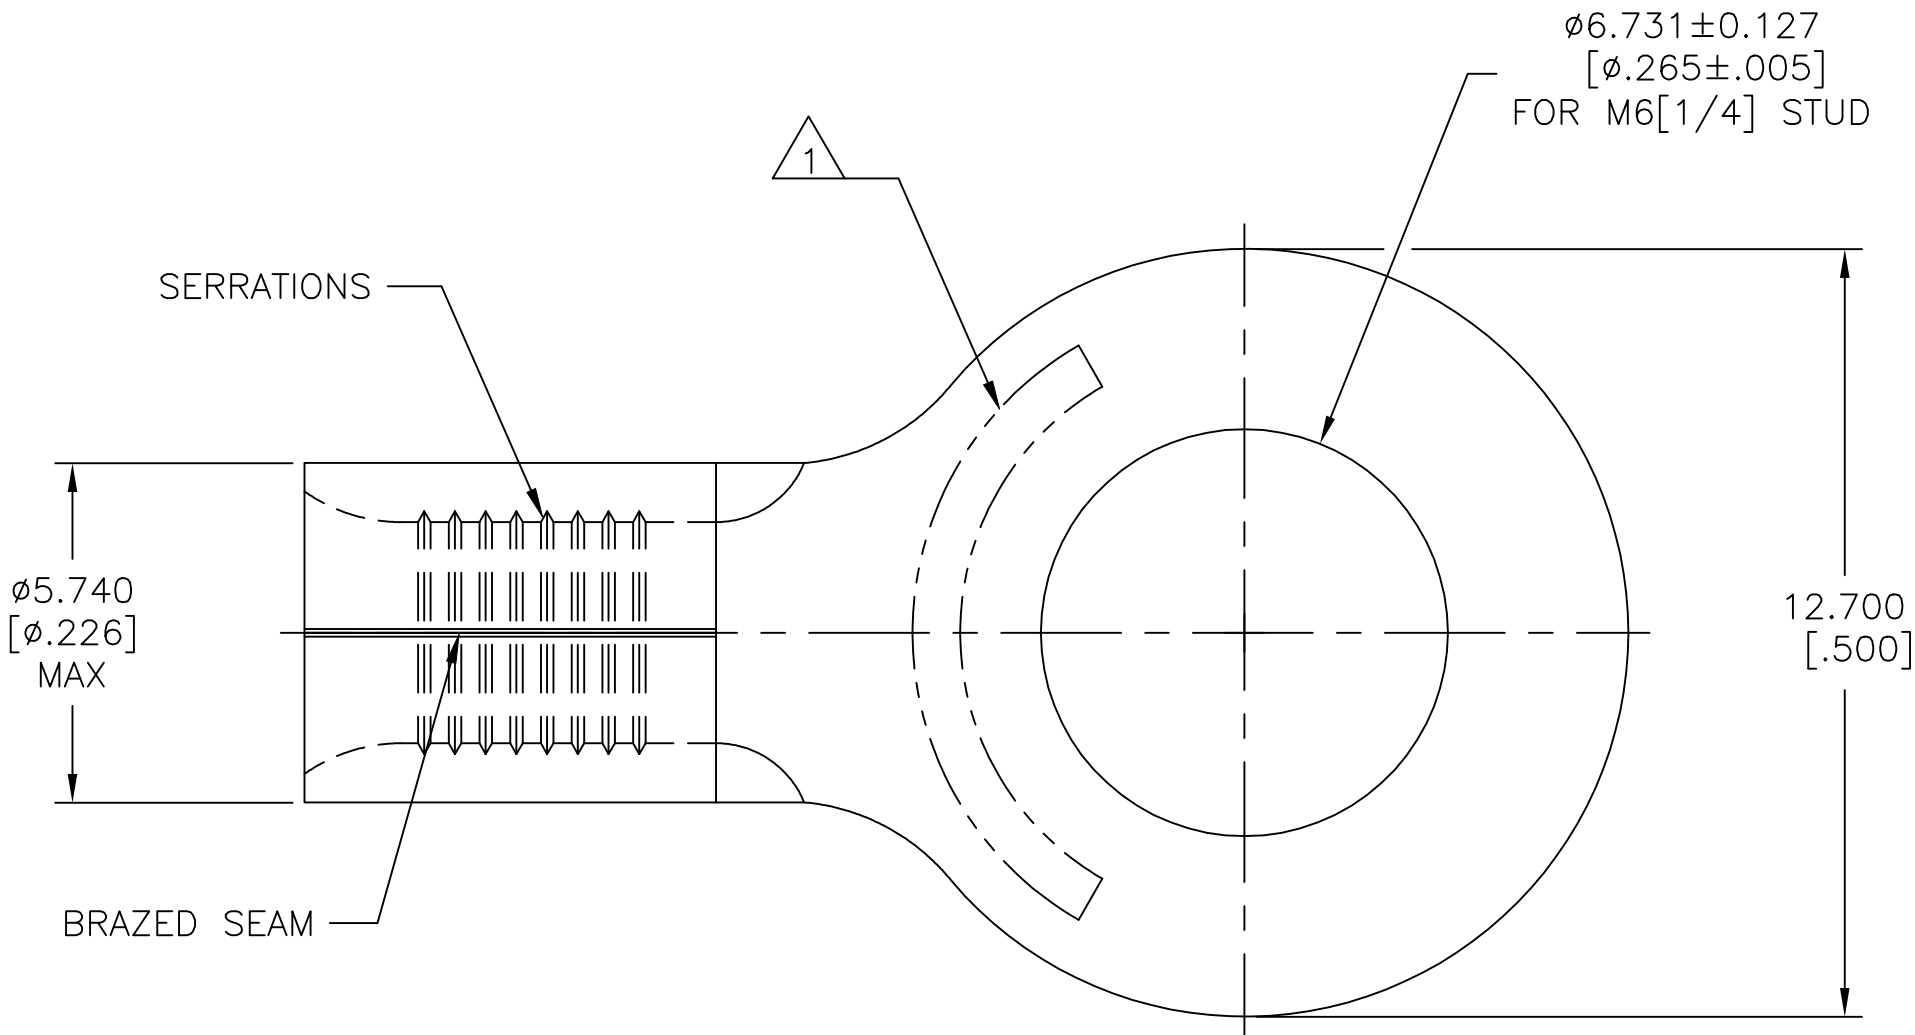

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 170°C[338°F]
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: N/A
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN TA BRINKMAN 3-17-93	 TE Connectivity Ltd.			
			CHK DA PATTERSON 3-17-93				
DIMENSIONS: mm [INCHES]			APVD JL MECKEY 3-17-93	NAME			
			PRODUCT SPEC	TERMINAL, RING TONGUE, SOLISTRAND 12-10 AWG			
			APPLICATION SPEC				
MATERIAL			—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			WEIGHT	A2	00779	C=35772	—
SEE TABLE			CUSTOMER DRAWING	SCALE	8:1	SHEET	1 OF 1
				REV	E4		