

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION





.19

(C) COPYRIGHT 19


BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REV & REDWN PER EC 0G1B-0217-98	29OCT98	TB	R5


1. WIRE RANGE: 0.5 - 2 mm² (20 - 14 AWG)
2. INSULATION RANGE: 2.54 - 4.57
- △3 FRICTION FIT ON A 3.56 DIAMETER PIN.

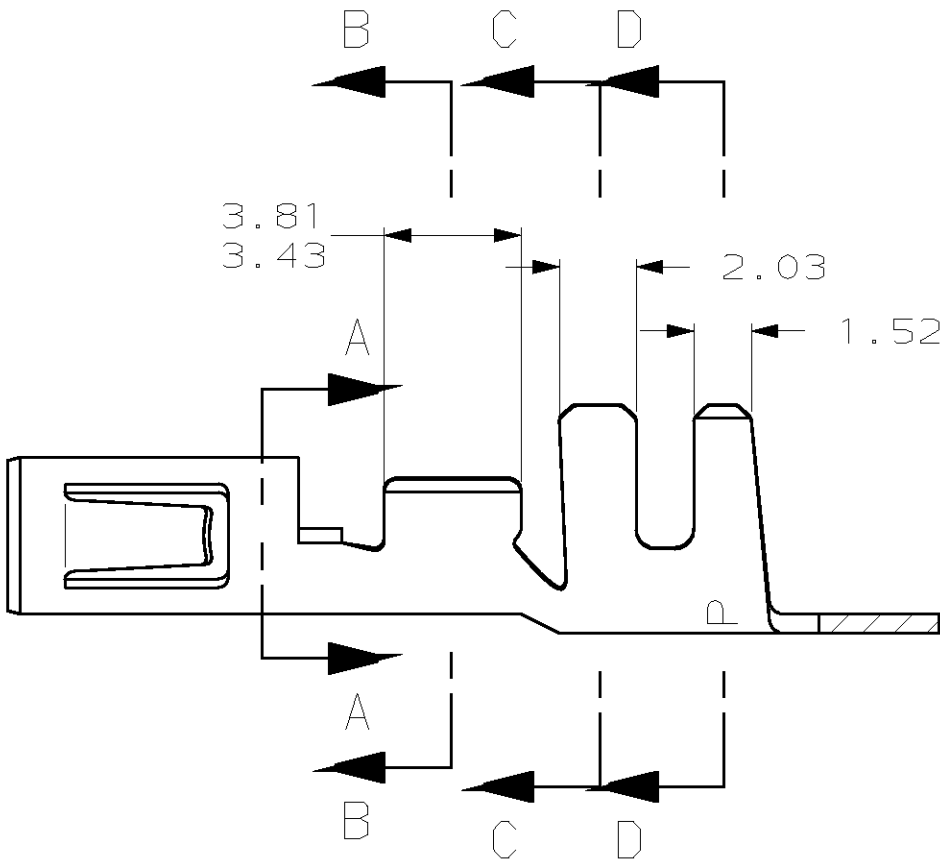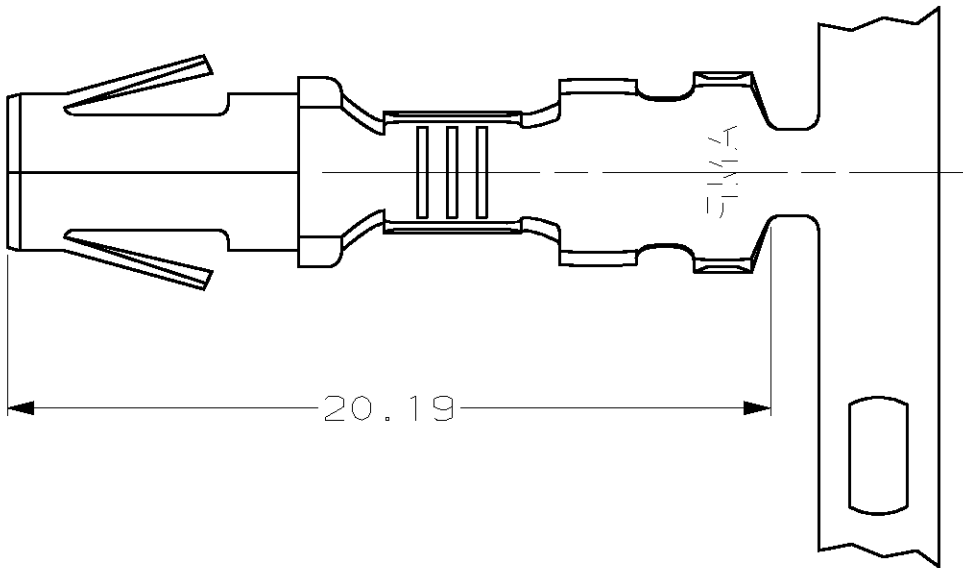


SECTION A-A

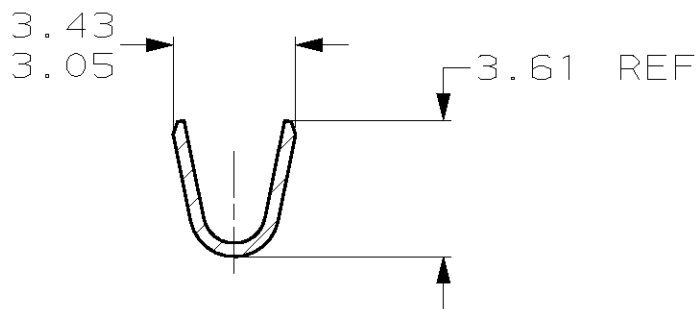

SECTION B-B

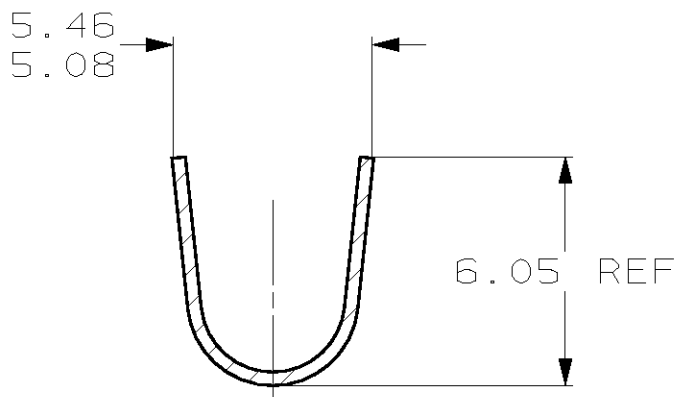

SECTION C-C

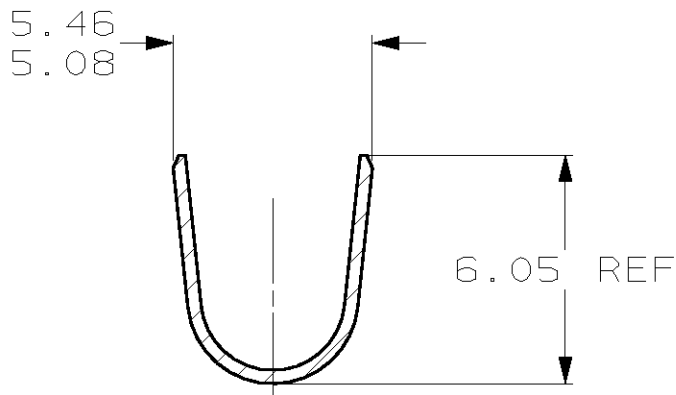

SECTION D-D

1.52	.060	3.43	.135	4.57	.180	20.19	.795
0.36	.014	3.05	.120	3.81	.150	6.05	.238
0.35	.014	2.54	.100	3.61	.142	5.46	.215
0.13	.005	2.03	.080	3.56	.140	5.08	.200
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

PRE TIN	0.36 PH BRZ	61626-2
PRE TIN	0.35 BRASS	61626-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. BECK 29OCT1998	AMP AMP Incorporated Harrisburg, PA 17105-3608			
DIMENSIONS: mm		CHK R. SWING 29OCT1998				
		APVD C. MARTIN 16NOV1998	NAME SOCKET, .140 PIN & SOCKET CONNECTOR			
		PRODUCT SPEC	SIZE A2			
MATERIAL SEE TABLE		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH SEE TABLE	APPLICATION SPEC			
			WEIGHT -			
			CUSTOMER DRAWING			
			SCALE 5:1			
			SHEET 1 OF 1			
			REV E			