

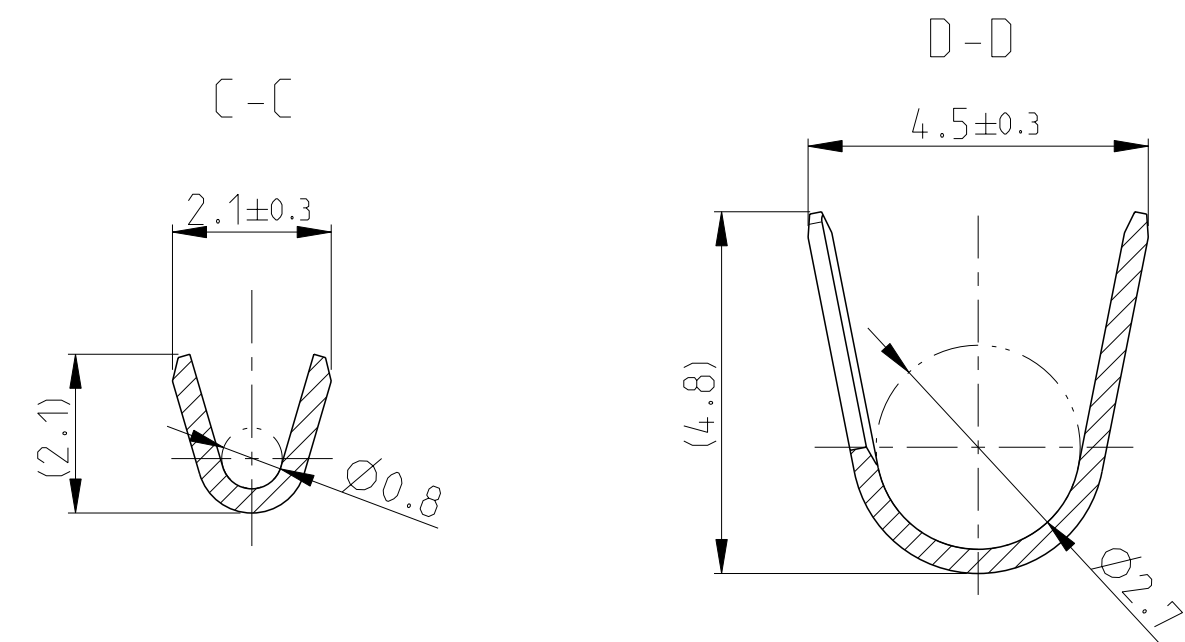
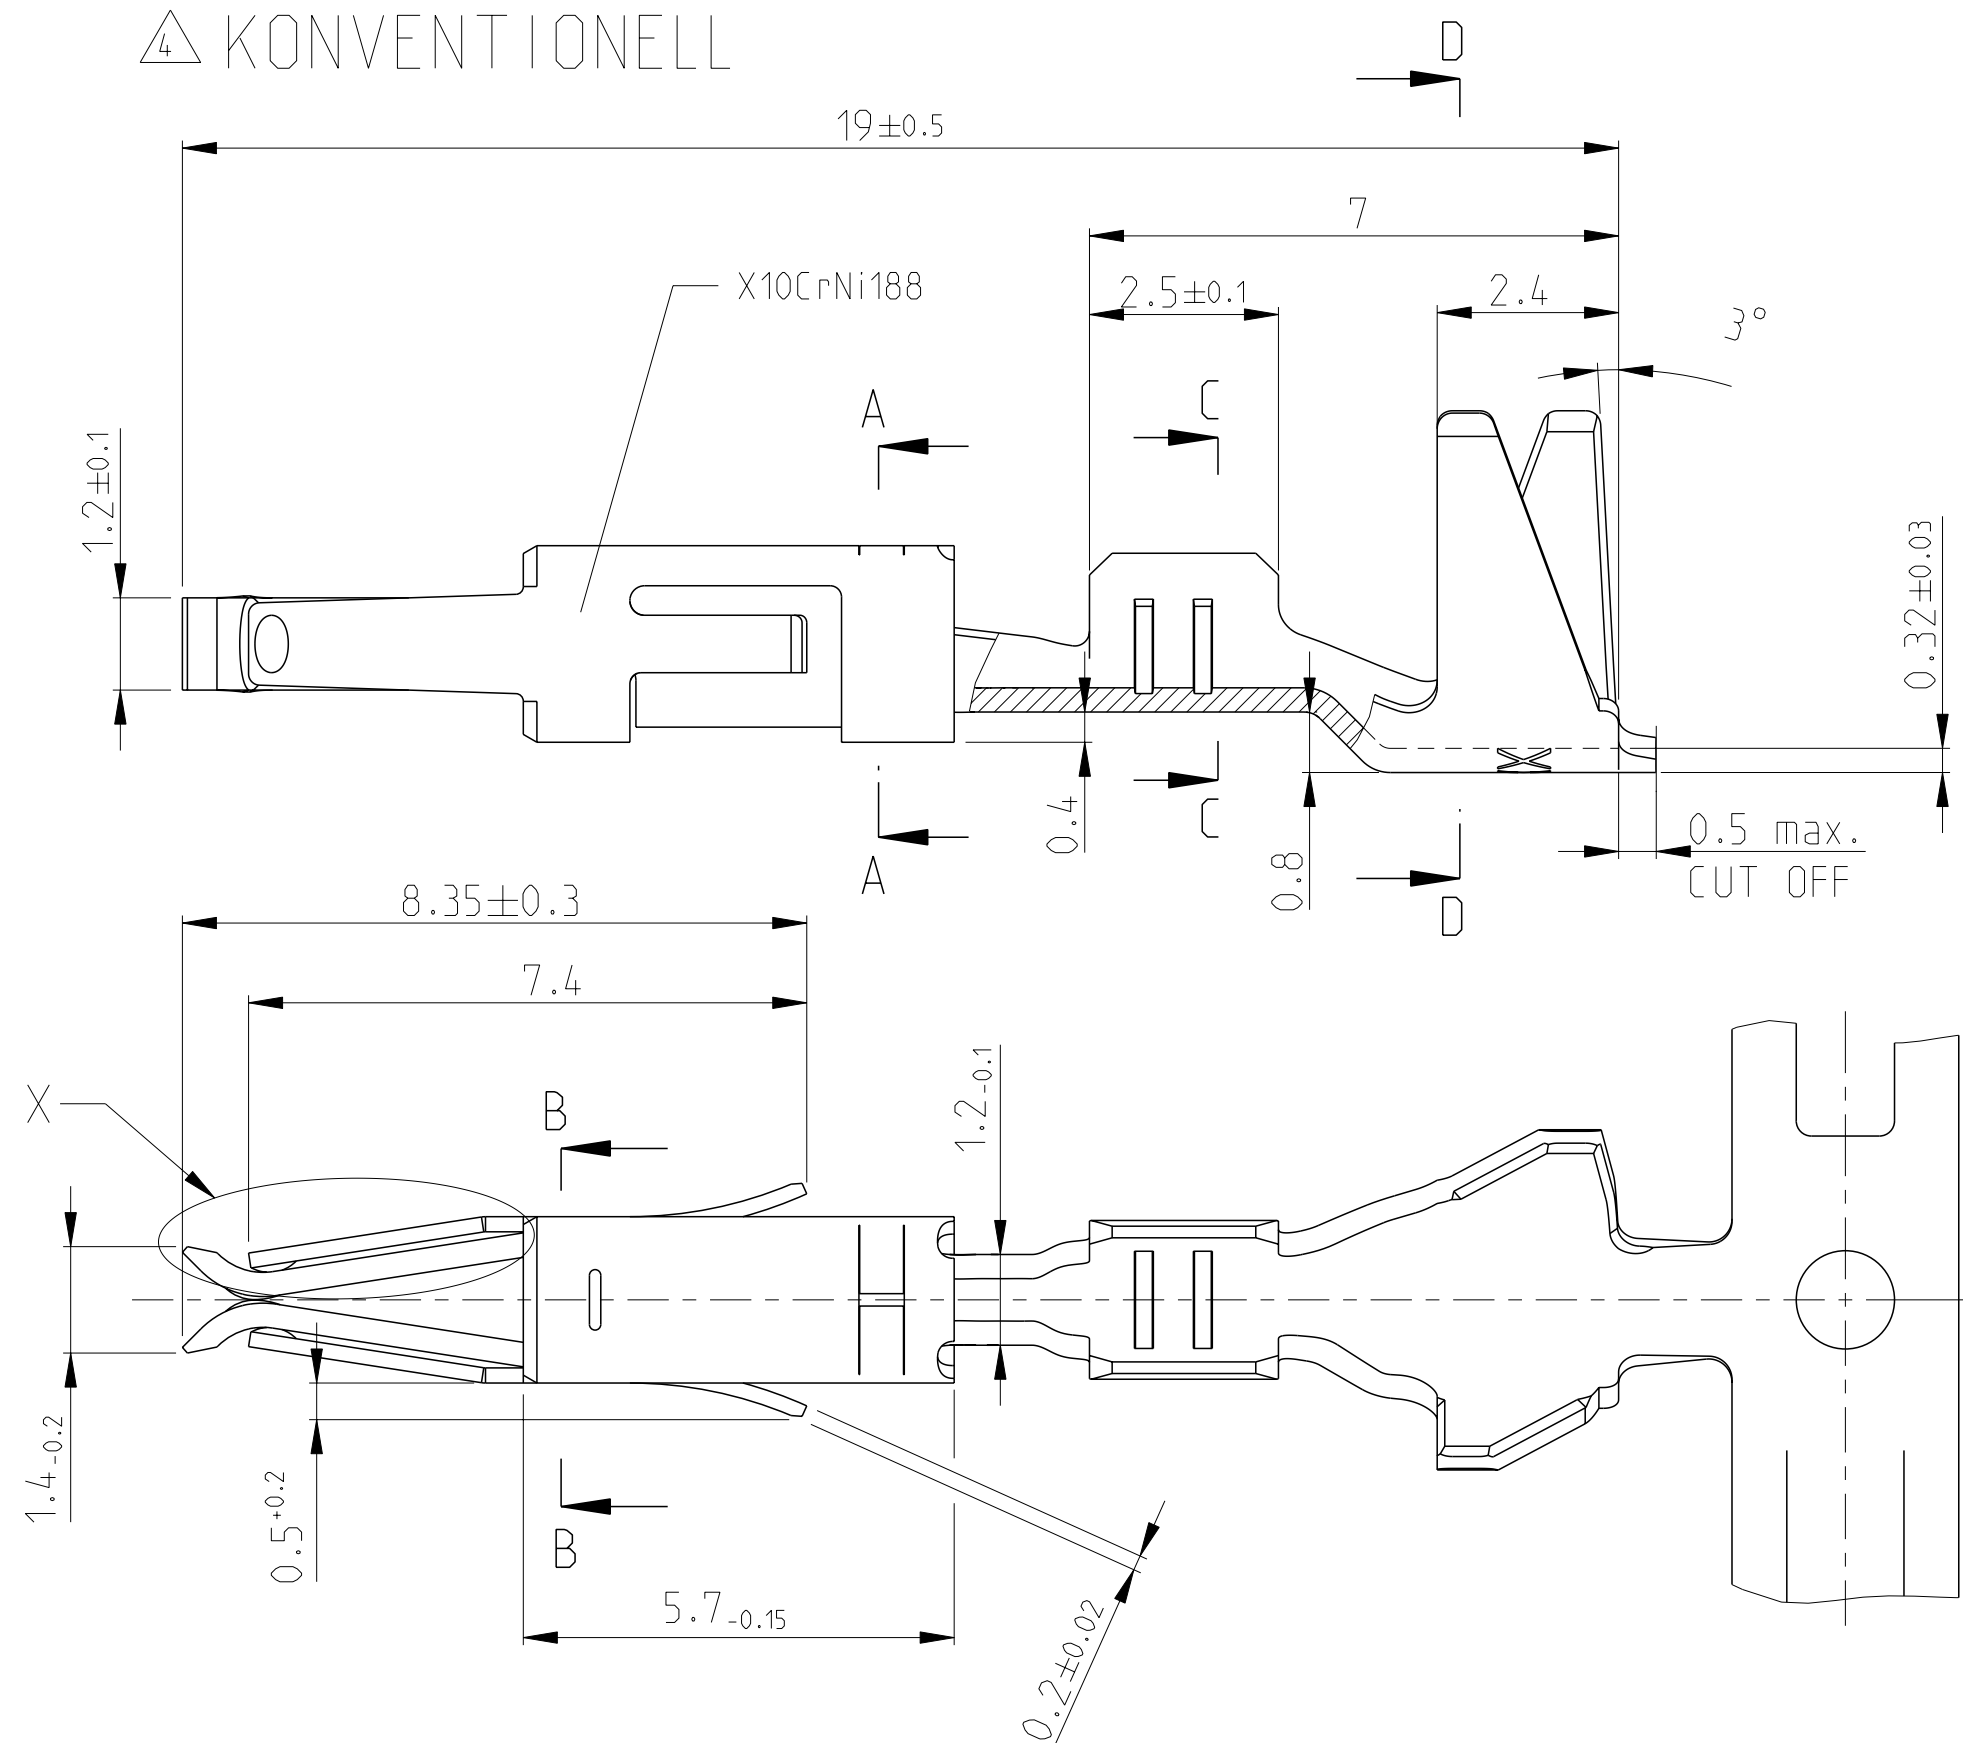
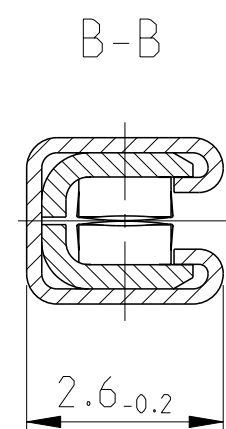
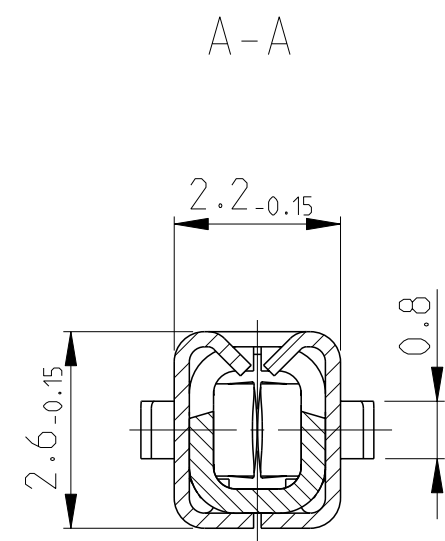
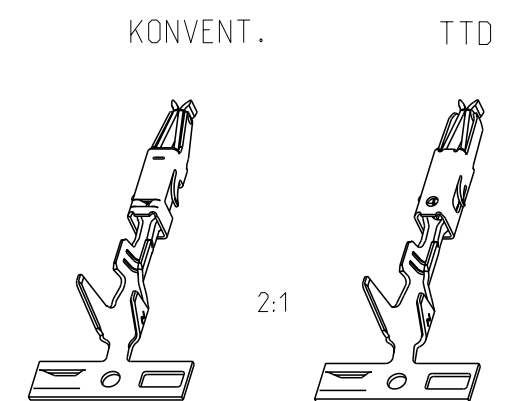


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		N4	OPTIONAL to note 5 TTD added. (area A3)	29JUN2011	Kirs	Mair
			N5	PRODUCT SPEC CORRECTED	23JUN2014	Ho.	Eder
			N6	ECR-15-012070	13AUG2015	JBJH	BK
			N7	ECR-22-153377	21SEP2022	FRAN	SCHI

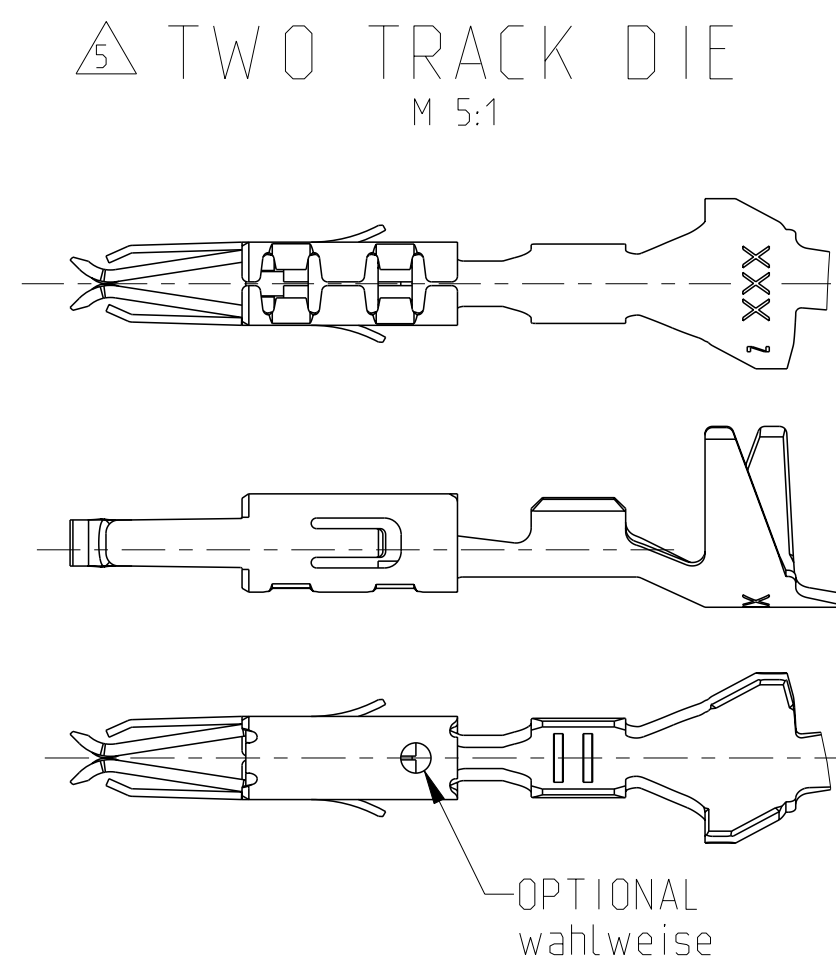

- 1 SELECTIVE GOLD PLATED MIN. 0.8 µm OVER NI
selektiv vergoldet 0.8 µm ueber Ni
- 2 TIN PLATED MIN. 0.2 µm OVER NI
verzinkt 0.2 µm ueber Ni
- 3 WIRE RANGE : 0.2 - 0.5 mm²
INSULATION-Ø: 2.8 mm (SINGLE WIRE SEAL)
Drahtgroessenbereich: 0.2 - 0.5 mm²
Isolations-Ø: 2.8 mm (Einzeldichtung)

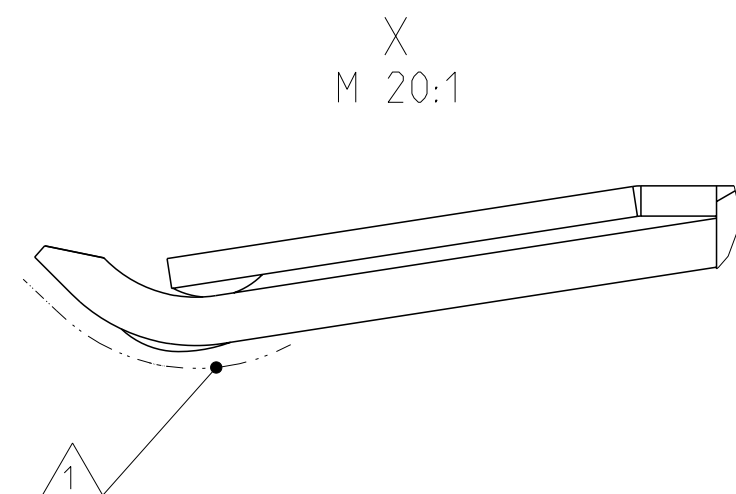

	 	 	CuFe2	962875-5	N
	 	 	CuSn4	962875-3	N
	 	PRETIN / vorverzinkt	CuFe2	962875-2	N
	 	PRETIN / vorverzinkt	CuSn4	962875-1	N
	VERSION	SURFACE / Oberflaeche	MATERIAL	PART NO	REV

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. Hofer	05-JAN-89		 TE Connectivity				
		CHK L. Nix	05-APR-89						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. Bleicher	NAME				
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ±0.2		PRODUCT SPEC 108-18055	MICRO TIMER 2 CONTACT WITH DOUBLE LOCKING LANCE mit doppelter Rastfeder				
		ANGLES FINISH ±2°		APPLICATION SPEC 114-18081					
		MATERIAL		WEIGHT 0.3 g			SIZE A2	CAGE CODE 00779	DRAWING NO C-962875
-		-		Customer Drawing		SCALE 10:1	SHEET 1	OF 1	REV N7