


RT-375

Single Wall tube with a 150°C operating temperature. A high level of clarity for enhanced visibility of substrates.

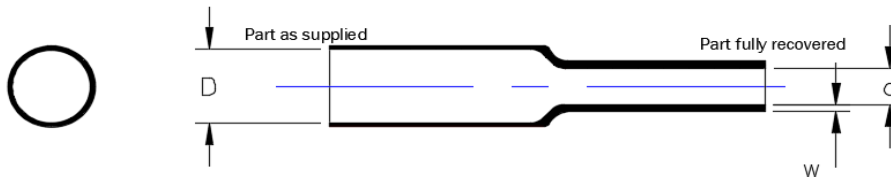

PRODUCT DIMENSIONS

SIZE	Inside Diameter as supplied (min) mm (<i>inch</i>) D	Inside Diameter after recovery (max) mm (<i>inch</i>) d	Wall Thickness after recovery (nom) mm (<i>inch</i>) W	Wall Thickness Tolerance after recovery mm (<i>inch</i>)
3/64	1.17 (.046)	0.58 (.023)	0.25 (.010)	0.10 (.004)
1/16	1.6 (.063)	0.79 (.031)	0.25 (.010)	0.10 (.004)
3/32	2.36 (.093)	1.17 (.046)	0.25 (.010)	0.10 (.004)
1/8	3.17 (.125)	1.57 (.062)	0.25 (.010)	0.10 (.004)
3/16	4.74 (.187)	2.36 (.093)	0.25 (.010)	0.10 (.004)
1/4	6.35 (.250)	3.17 (.125)	0.30 (.012)	0.15 (.006)
3/8	9.5 (.375)	4.74 (.187)	0.30 (.012)	0.15 (.006)
1/2	12.7 (.500)	6.35 (.250)	0.30 (.012)	0.15 (.006)
3/4	19.05 (.750)	9.5 (.375)	0.43 (.017)	0.15 (.006)
1	25.4 (1.000)	12.7 (.500)	0.48 (.019)	0.15 (.006)
1-1/2	38.1 (1.500)	19.05 (.750)	0.51 (.020)	0.15 (.006)
2	50.8 (2.00)	25.4 (1.00)	0.51 (.020)	0.15 (.006)

RT-375 – STANDARD SIZE REFERENCE DIMENSIONAL DRAWING




©2020 TE Connectivity Ltd. family of companies
All Rights Reserved

DIMENSIONS IN
mm (*Inch*)

TITLE

**RT-375 – IRRADIATED MODIFIED
FLUOROPOLYMER SINGLE WALL HEAT
SHRINK TUBING**



SHEET

NO

REV

A INITIAL REVISION

HD

14/10/2021

1 of 2

RT-375 – Standard Sizes

A

REV ENGINEERING CHANGE

CHK

DATE

RT-375

PRODUCT INFORMATION

General use single wall Fluoropolymer Tubing.
Shrink Ratio – 2:1
Longitudinal Shrinkage on full recovery – 0 to -10%
Material conforms to TE Specification RT-375
Standard Colour: Clear
Flame Retardant

Tubing cut to specific lengths can be supplied from the product sizes referenced within this drawing.

Cut length tolerances are as per the following table:

STANDARD CUTTING TOLERANCES (mm)	
CUT LENGTH	TOLERANCE
Up to 9.9mm	±0.5mm
10mm to 24.9mm	±1.0mm
25mm to 54.9mm	±1.5mm
55mm to 99.9mm	±3.0mm
100mm to 149.9mm	±4.0mm
150mm to 499.9mm	±5.0mm
500mm to 1200mm	±12.5mm