

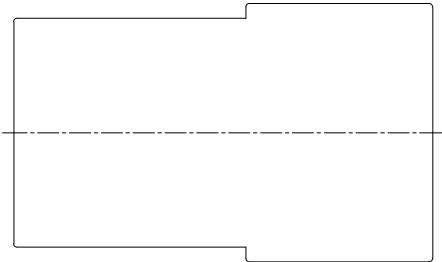
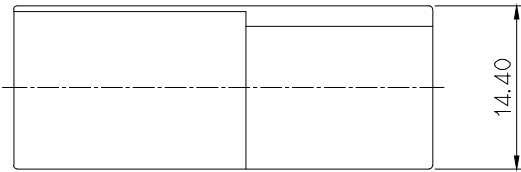
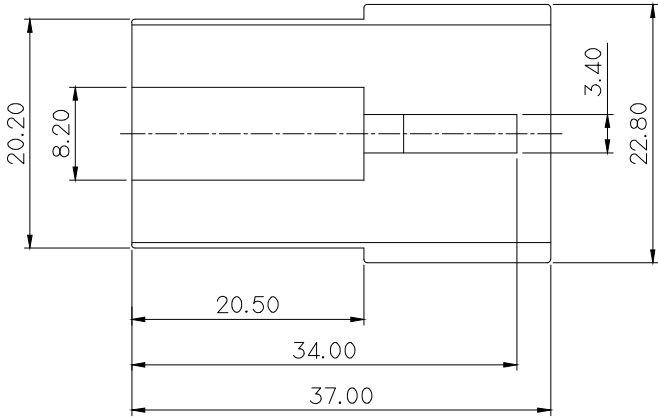
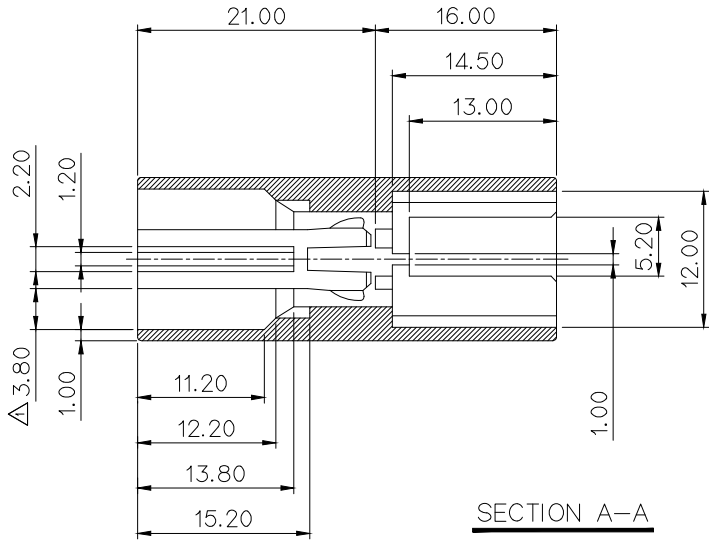
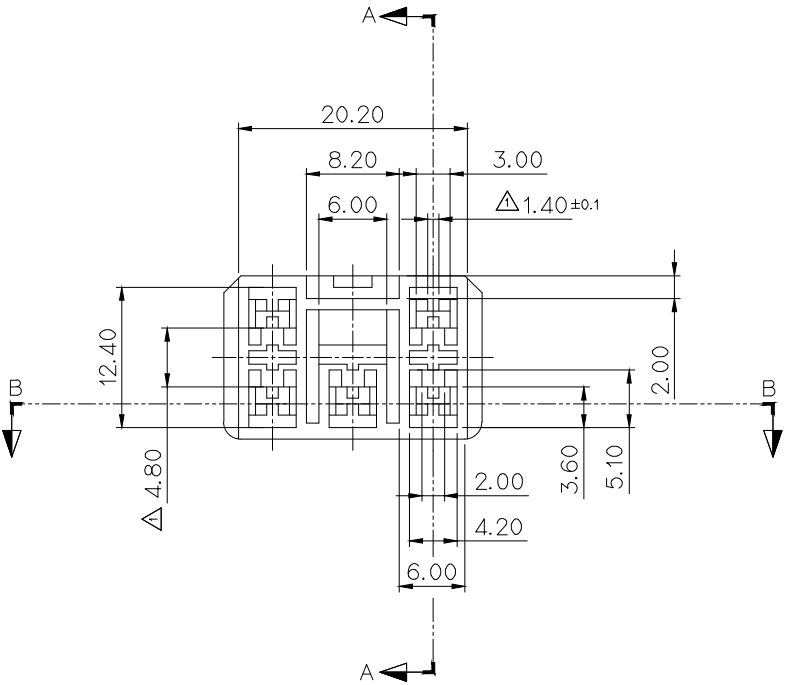


*	NO.	MATERIAL	COLOR
	0	NYLON66	NATURAL
	1		RED
	2		BLUE
	3		YELLOW
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

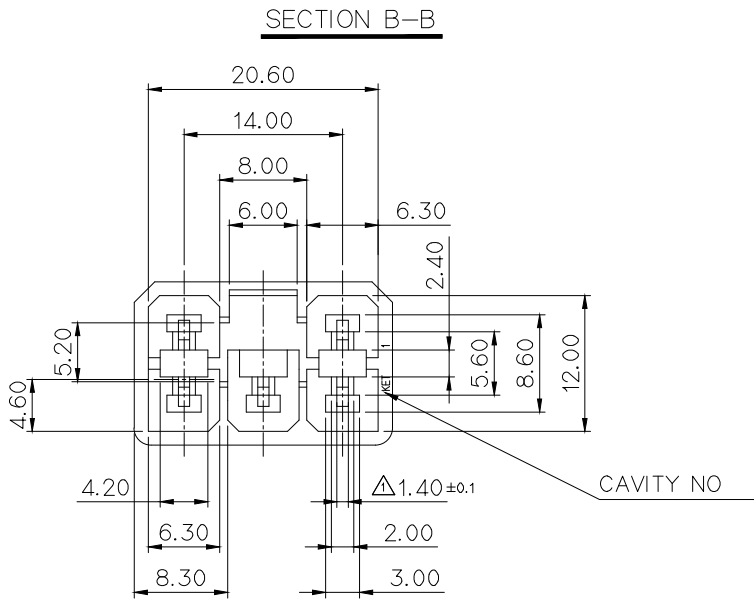

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

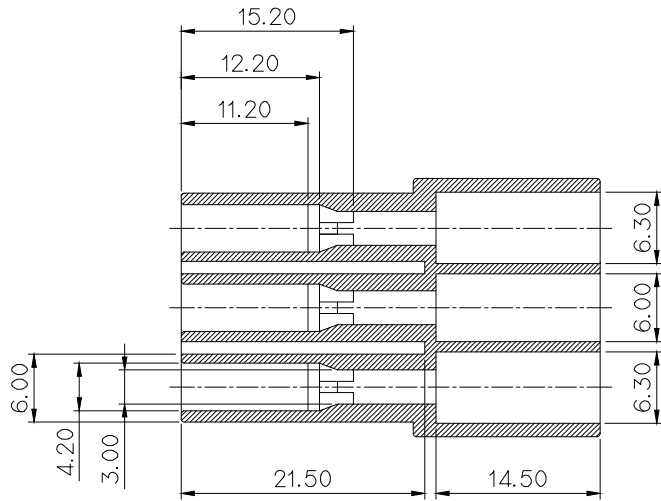

주 기

- 제품기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것.
- 적용 TERMINAL : ST740393, 315, 187, 193
- 적용 HOUSING : MG610189
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740393, 315, 187, 193
- APPLICABLE HOUSING : MG610189
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH SEE TABLE				
						WIRE RANGE			CLASS 7118-3050	
	도면 전산화에 따른 재작성	LMJ	MONO	KKJ	'05.05.10	INSULATION		TYPE		
	유격 수정에 의한 도면 수정	KCD		KKJ	JJH	'03.12.28	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG620211
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		PA 5M HOUSING		
DR.	김 경준 1990.10.07	CHK.	CHOSH	11/10						
CHK.	JWK	APP.	Watanabe							

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK