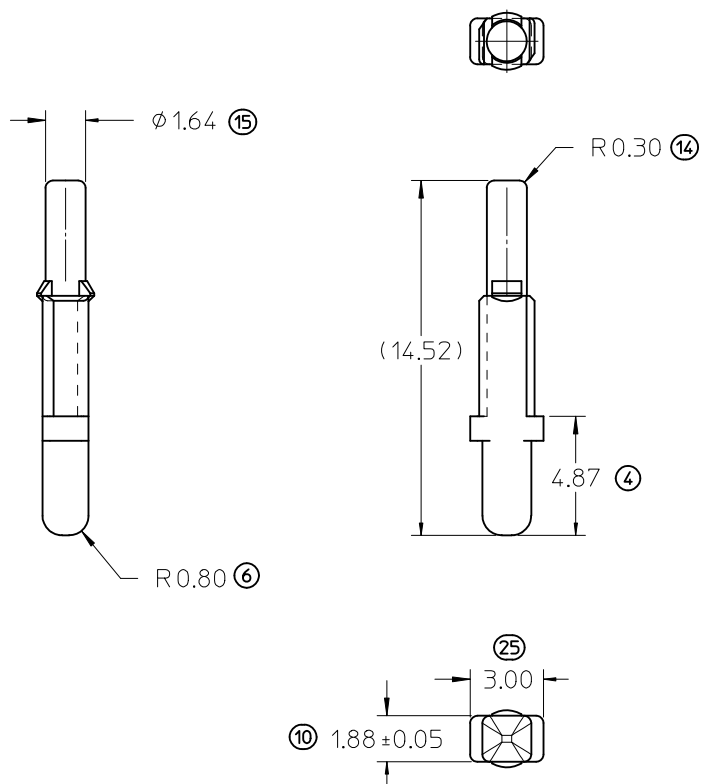


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

- A. RESIN:
 1. NYLON BLEND
 2. COLOR: STONE GREY

2. DESIGN - GENERAL:

- A. THIS IS A 100% CAD GENERATED PART. THE CAD MATHEMATICAL DATA IS THE MASTER FOR THIS PART. FOR DIMENSIONAL OR ANY SPECIAL TOOLING INFORMATION NOT SHOWN ON THIS DRAWING, ANALYZE THE CAD MODEL.

B. TOLERANCES:

- a. LINEAR
 - 0.X ± 0.30
 - 0.XX ± 0.10
 - 0.XXX ± 0.10
- b. ANGULAR X° ± 3°
- c. 0.2 A B C

3. SYSTEM REQUIREMENTS:

- A. THIS GROMMET SEAL PLUG MATES TO ALL HRNS CONN ASSY PART NUMBERS IDENTIFIED IN MOLEX SD-34566-001 AND SD-34576-001
- B. WHEN TESTED TO SAE/USCAR-2 REV: 3, APRIL 2001, OR GMW #3191, AUGUST 22, 2000 (DRAFT).
 1. GMW #3191 AUGUST 22, 2000 (DRAFT); TEMPERATURE CLASS 3, SEALING CLASS 3, VIBRATION CLASS 2
 2. RESTRICTED AND REPORTABLE CHEMICALS PER GMW #3059, REV: D AUGUST 2002
 3. MX123 0.64 GROMMET SEAL PLUG USER FORCES
 - a. INSERTION FORCE INTO LOCK POSITION: ≤ 40N
 - b. REMOVAL FORCE FROM LOCK POSITION: ≥ 5N AND ≤ 40N

EC NO: UAU2012-0906 DRWN: BHU02 2012/02/08 CHKD: APPR: VKOSHY 2012/02/10 A4	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
		= 0 = 0	mm INCH		DIMENSION STYLE MM ONLY		TITLE MX123 0.64 GROMMET SEAL PLUG						
			4 PLACES	± ---	± ---	DRAWN BY JSZYMKOW							DATE 2004/01/23
			3 PLACES	± ---	± ---								
			2 PLACES	± ---	± ---	CHECKED BY YLEPOTTI	DATE 2004/01/23	MOLEX INCORPORATED					
			1 PLACE	± ---	± ---								
			ANGULAR ± ---°			APPROVED BY YLEPOTTI	DATE 2004/01/23	MATERIAL NO. 34586-0001	DOCUMENT NO. SD-34586-001	SHEET NO. 1 OF 1			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										