

APN: 10781041
 Material: CUFE2P
 Surface: SN
 Material Thickness: 0.30 mm
 Cross Section [mm²]: 0.35 | 0.50 | 0.75

FRAMATOME 211CC3S1160

Strip Length: 4.50 mm
 Cable Type: FLRY-B

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.20-1.90
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.35		12x0.21	1.30	50	0.95	+ 0.03 - 0.03	1.85	+ 0.10 - 0.10	2.10	+ 0.10 - 0.10	2.55	+ 0.10 - 0.10
FLRY-B 0.50		16x0.21	1.50	80	1.05	+ 0.03 - 0.03	1.85	+ 0.10 - 0.10	2.20	+ 0.10 - 0.10	2.60	+ 0.10 - 0.10
FLRY-B 0.75		24x0.21	1.80	120	1.15	+ 0.03 - 0.03	1.90	+ 0.10 - 0.10	2.30	+ 0.10 - 0.10	2.65	+ 0.10 - 0.10


Core:
 C-1.85-3.5-19
 APN 10713547

Isolation:
 IO-2.50-2.5-10
 APN 10713870

Anvil:

Two piece anvil:
 AC-1.85-3.75-B
 APN 10803466
 AI-2.50-3.4-0.6
 APN 10806960

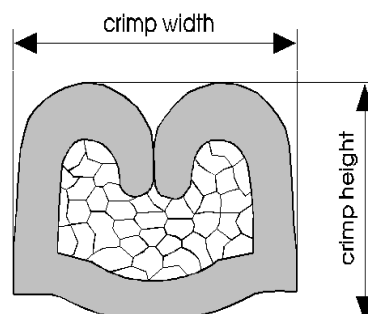


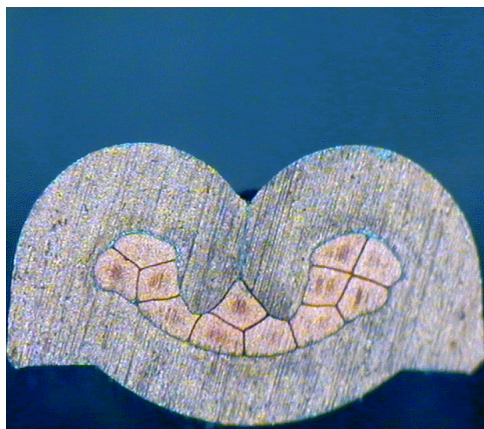

Cable:
FLRY-B 0.35mm² = 12x0.21 mm

Crimp height:
0.95 mm


Crimp width:
1.85 mm

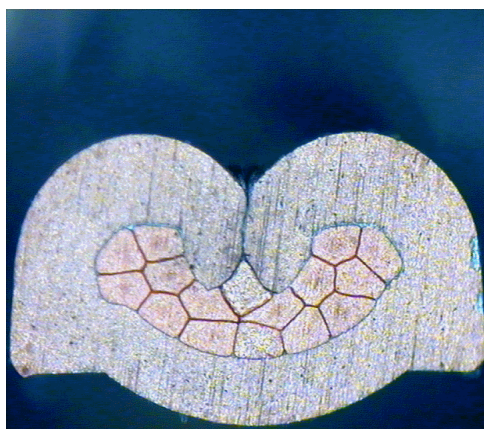

Cable:
FLRY-B 0.50mm² = 16x0.21 mm

Crimp height:
1.05 mm

Crimp width:
1.85 mm

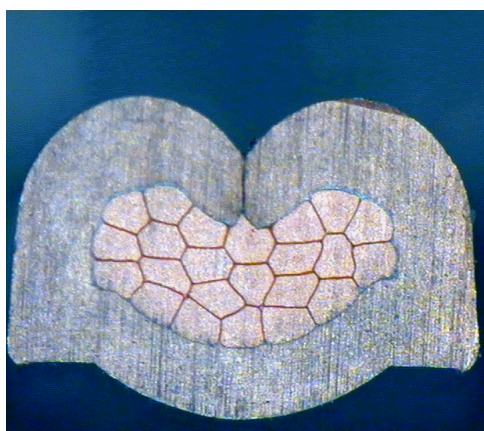

Cable:
FLRY-B 0.75mm² = 24x0.21 mm

Crimp height:
1.15 mm

Crimp width:
1.90 mm