

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1002
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80		2,02	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1002:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
 Insul. Wall Designator: THIN

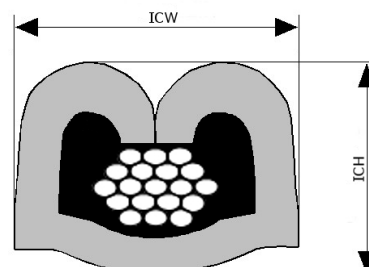

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1002
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80		2,02	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1002:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE
 Insul. Wall Designator: THIN

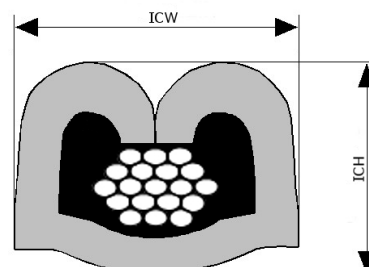

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,40 - 2,00
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1004 0,80		1,55	90	1,30	0,05	2,50	0,10	2,10	0,10	2,60	0,10
1004 1,00		1,75	120	1,40	0,05	2,50	0,10	2,50	0,10	2,70	0,10

Cable type code legend:

1004:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC
 Insul. Wall Designator: ULTRA THIN

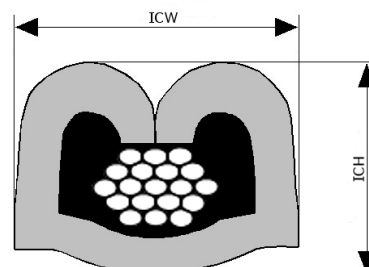

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 0,80 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,40
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50		1,74	80	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
1005 0,80		2,03	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10
1005 1,00		2,23	120	1,40	0,05	2,50	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

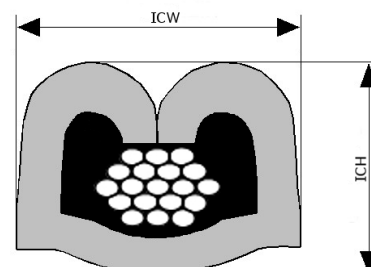

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1005
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 1,85 - 2,20
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 1,85 - 2,20
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

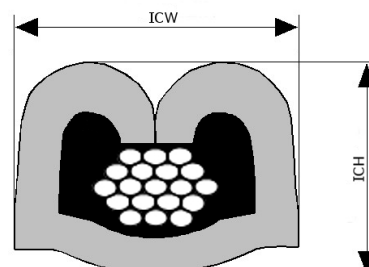

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1005
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 1,85 - 2,20
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

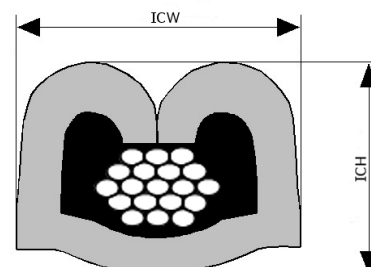

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1005 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 + 1021 0,50		1,60 + 0,96	55	1,35	0,05	2,40	0,10	2,50	0,10	2,60	0,10



Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

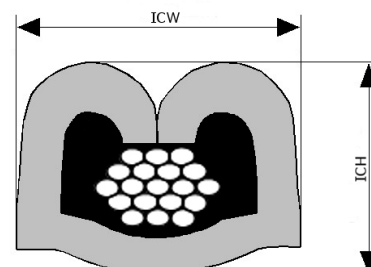

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 0,80 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 2,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50		2,15	80	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
1007 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10
1007 1,00		2,58	120	1,40	0,05	2,50	0,10	2,70	0,10	2,60	0,10

Cable type code legend:

1007:
 Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

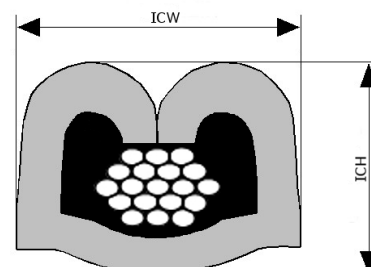

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 2,45 - 2,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00		2,58	120	1,40	0,05	2,50	0,10	2,70	0,10	2,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

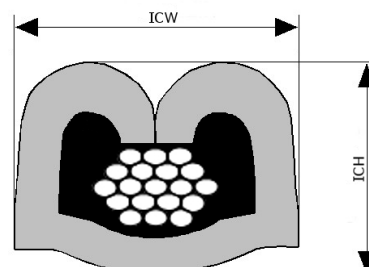

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1007
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

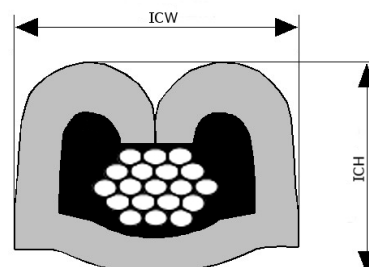

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 0,51 | 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 3,05
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50		2,45	80	1,25	0,05	2,45	0,10	2,50	0,10	2,60	0,10
1009 0,51		2,45	80	1,25	0,05	2,45	0,10	2,50	0,10	2,60	0,10
1009 0,80		2,78	90	1,30	0,05	2,50	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1019
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 1,90
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1019 0,80		1,80	90	1,30	0,05	2,50	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1019:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN SPECIAL

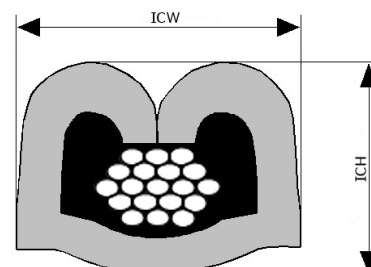

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 0,90 - 1,57
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,50		0,96	80	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
1021 1,00		1,46	120	1,40	0,05	2,50	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

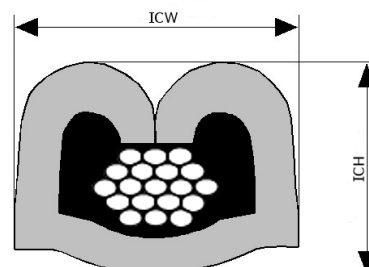

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1021 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,50 + 1021 0,50		0,96 + 0,96	80	1,45	0,05	2,65	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

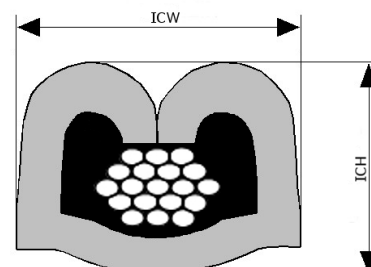

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1021 + 1021
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,50 + 1021 0,50		0,96 + 0,96	80	1,45	0,05	2,65	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

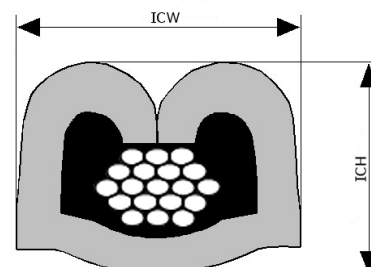

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1025
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN

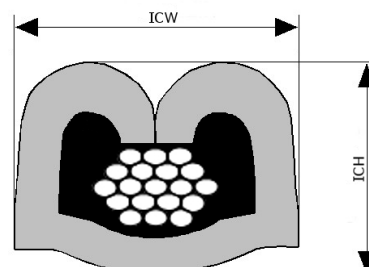

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1025
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 1,85 - 2,18
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1025:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

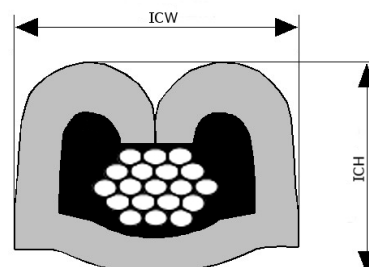

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1026
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1026
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,30	0,05	2,50	0,10	2,70	0,10	2,60	0,10

Cable type code legend:

1026:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: HDPE, PVC, XLPE
 Insul. Wall Designator: REGULAR

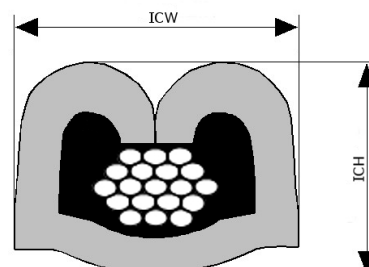

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1035
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,45
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,80		2,33	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1035:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR

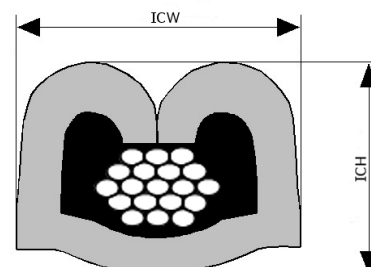

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1044
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,30 - 2,60
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1044 0,50		2,45	120	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10

Cable type code legend:

1044:

Industry Designator: SAE
 Conductor Material: STEEL
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: SPECIAL

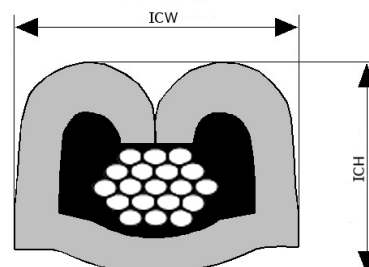

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 1047 + 1021
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 + 1021 0,50		1,58 + 0,96	60	1,35	0,05	2,40	0,10	2,50	0,10	2,60	0,10



Cable type code legend:

1047:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: THIN

1021:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

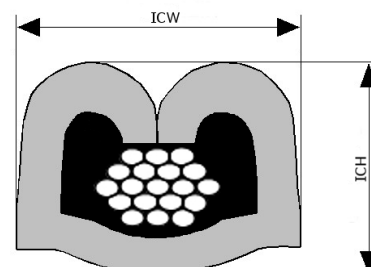

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1056
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,40
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 1,00		2,23	120	1,35	0,05	2,40	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1056:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NI
 Insul. Material: FLUORPOLYM, PTFE
 Insul. Wall Designator: THIN

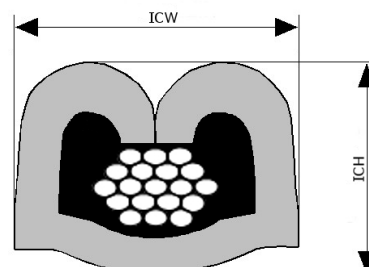

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1066
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 0,00 - 0,00
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80		0,00	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1066:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1090
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,38 - 1,47
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1090 1,00		1,43	120	1,40	0,05	2,50	0,10	2,60	0,10	2,60	0,10

Cable type code legend:

1090:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

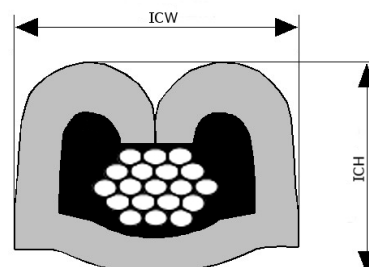

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1094
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,35 - 2,50
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50		2,43	80	1,25	0,05	2,45	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

1094:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: HEAVY DUTY



Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,75 | 1,00 | 1,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,60
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 0,75		1,93	85	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
2005 1,00		2,18	120	1,35	0,05	2,50	0,10	2,60	0,10	2,70	0,10
2005 1,50		2,40	160	1,50	0,05	2,50	0,10	2,70	0,10	2,70	0,10

Cable type code legend:

2005: FLR2X (SAAB C)
 Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, TPE, XLPE
 Insul. Wall Designator: THIN

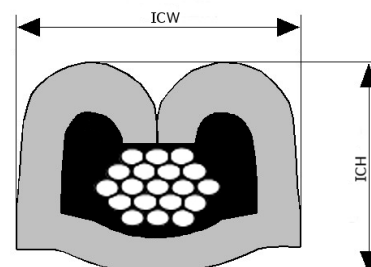

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,75

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2006
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,20 - 2,80
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2006 0,75		2,50	85	1,25	0,05	2,45	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

2006:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: EPR, PVC, XLPE
 Insul. Wall Designator: REGULAR

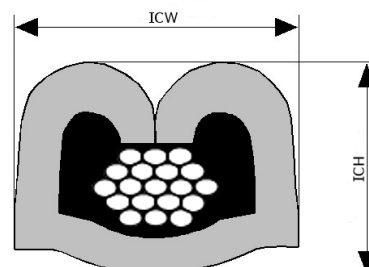

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 0,75 | 1,00 | 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 2,40
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50		1,50	80	1,35	0,05	2,10	0,10	2,30	0,10	2,70	0,10
2010 0,75		1,75	120	1,45	0,05	2,10	0,10	2,40	0,10	2,70	0,10
2010 1,00		1,95	160	1,55	0,05	2,10	0,10	2,50	0,10	2,70	0,10
2010 1,50		2,20	150	1,55	0,05	2,25	0,10	2,60	0,10	2,75	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

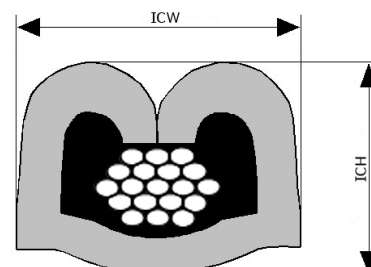

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 1,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Insulation Range Φ [mm]: 2,00 - 2,40
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,50		2,20	345	1,55	0,05	2,25	0,10	2,60	0,10	2,85	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

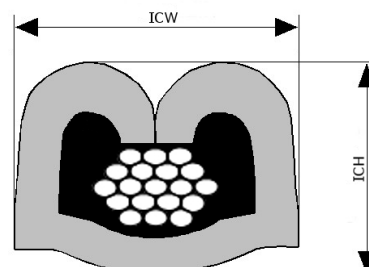

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,35 | 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010 + 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35 + 2010 0,35		1,34 + 1,34	50	1,30	0,05	2,45	0,10	2,60	0,10	2,70	0,10
2010 0,50 + 2010 0,50	TOP	1,50 + 1,50	80	1,55	0,05	2,10	0,10	2,90	0,10	2,80	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

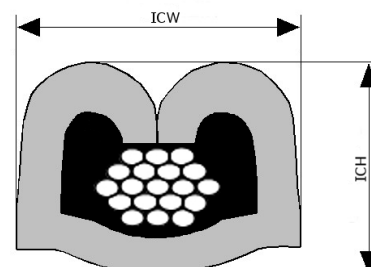

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2011
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,05 - 2,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,75		2,28	85	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
2011 1,00		2,54	228	1,50	0,05	2,20	0,10	2,70	0,10	2,80	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: P/EST, PE, PVC, XLPE
 Insul. Wall Designator: REGULAR

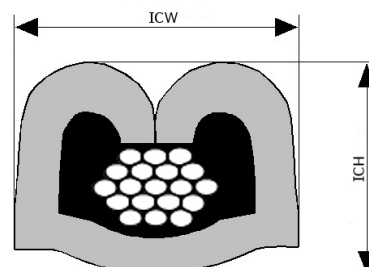

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2016
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 0,75 - 1,00
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,50		0,88	80	1,20	0,05	2,45	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

2016: DIN-CORE
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

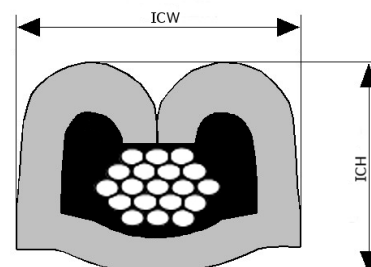

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50 | 0,75 | 1,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,30 - 2,10
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,50		1,50	80	1,35	0,05	2,10	0,10	2,30	0,10	2,70	0,10
2017 0,75		1,75	120	1,45	0,05	2,10	0,10	2,40	0,10	2,70	0,10
2017 1,00		1,95	160	1,55	0,05	2,10	0,10	2,50	0,10	2,70	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN

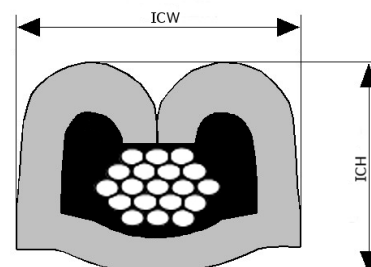

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017 + 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,50 + 2017 0,50	TOP	1,50 + 1,50	80	1,55	0,05	2,10	0,10	2,90	0,10	2,80	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN

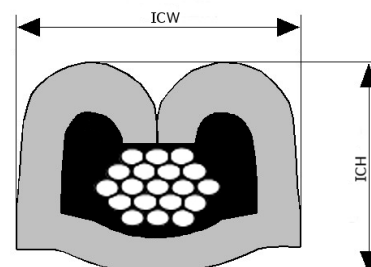

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2039
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,18 - 1,37
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2039 0,50		1,28	75	1,20	0,05	2,40	0,10	1,90	0,10	2,50	0,10

Cable type code legend:

2039:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PPE, PVC
 Insul. Wall Designator: ULTRA THIN

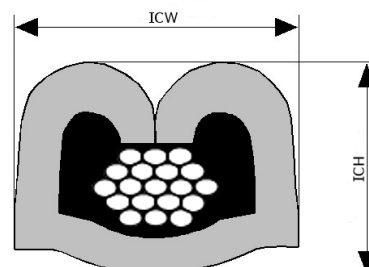

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 2041
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,43 - 1,61
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2041 0,50		1,52	75	1,20	0,05	2,40	0,10	2,00	0,10	2,50	0,10

Cable type code legend:

2041:

Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PPE
 Insul. Wall Designator: THIN

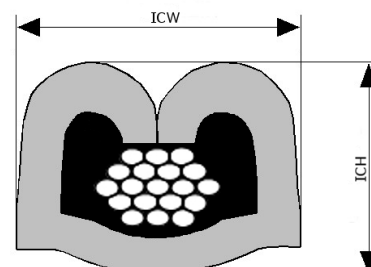

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,75



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2063
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 0,00 - 1,20
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2063 0,75		0,60	90	1,25	0,05	2,45	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

2063: DRAIN-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

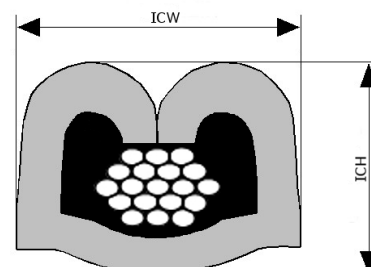

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,85



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 1,90
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85		1,80	95	1,30	0,05	2,45	0,10	2,40	0,10	2,70	0,10

Cable type code legend:

3003: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, X-PVC
 Insul. Wall Designator: THIN

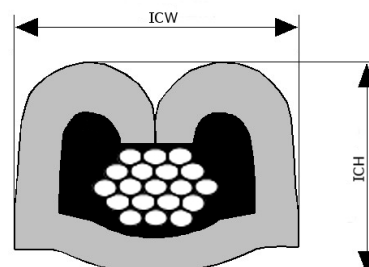

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 3004
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,50 - 1,70
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50		1,60	75	1,20	0,05	2,45	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

3004: AVSS
 Industry Designator: JIS/JA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE, X-PVC
 Insul. Wall Designator: THIN

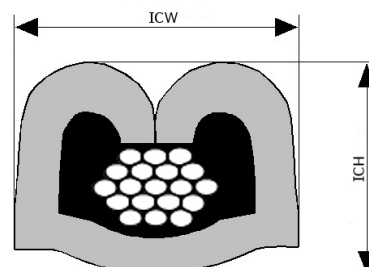

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 7000
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
 Insulation Range Φ [mm]: 0,70 - 0,90
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
7000 0,50		0,80	80	1,15	0,05	2,40	0,10	0,00	0,10	0,00	0,10

Cable type code legend:

7000:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: NONE
 Insul. Wall Designator: NONE

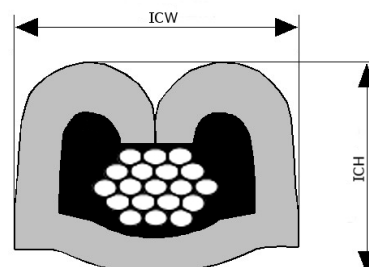

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,75 | 1,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,70 - 2,10
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,75		1,80	85	1,25	0,05	2,45	0,10	2,40	0,10	2,60	0,10
8000 1,00		2,00	120	1,35	0,05	2,45	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN

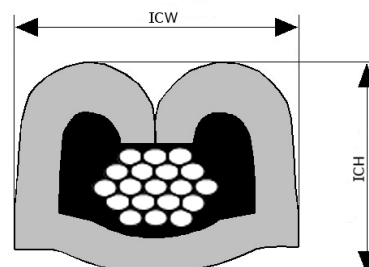

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9003
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,15 - 2,35
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

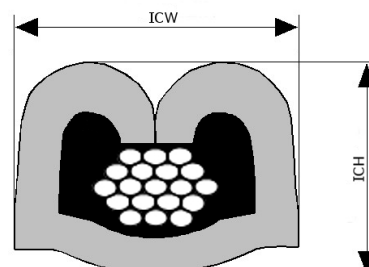

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 9003
 Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]
 Insulation Range Φ [mm]: 2,15 - 2,35
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,30	0,05	2,50	0,10	2,50	0,10	2,60	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

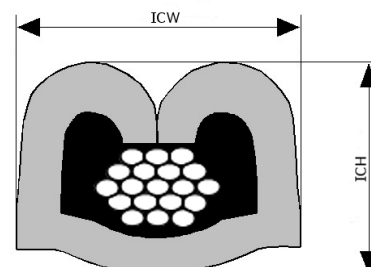

Crimp Information Sheet

Terminal Part Number: 12047581
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 0,80

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 9003
 Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
 Insulation Range Φ [mm]: 2,15 - 2,35
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,30	0,05	2,50	0,10	2,70	0,10	2,60	0,10

Cable type code legend:

9003:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PVDF
 Insul. Wall Designator: MIX

