

Terminal Part Number: 15317331
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,70 - 4,07
Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 15324994		3,89	290	2,40	0,05	4,10	0,10	6,80	0,20	7,00	0,20

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

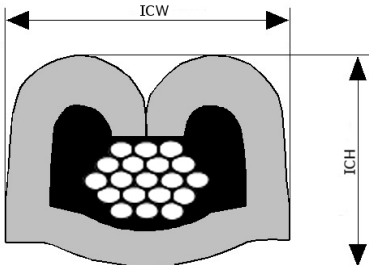

Crimp Information Sheet

DELPHI

Terminal Part Number: 15317331
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 4,00 | 5,00 | 6,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ [mm]: 3,20 - 4,30
Seal(s): 15324996 | 15324994 | 12059260 | 15324993

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 4,00 / 15324996		3,45	350	2,40	0,05	4,15	0,10	6,10	0,20	7,30	0,20
2010 4,00 / 15324994		3,45	350	2,40	0,05	4,15	0,10	6,30	0,20	7,20	0,20
2010 5,00 / 15324993		4,05	290	2,40	0,05	4,20	0,10	6,80	0,20	7,30	0,20
2010 5,00 / 15324996		4,05	290	2,40	0,05	4,20	0,10	6,60	0,20	7,20	0,20
2010 6,00 / 15324996		4,05	500	2,70	0,05	4,20	0,10	6,80	0,20	7,30	0,20
2010 6,00 / 12059260		4,05	500	2,70	0,05	4,20	0,10	6,80	0,20	7,30	0,20

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

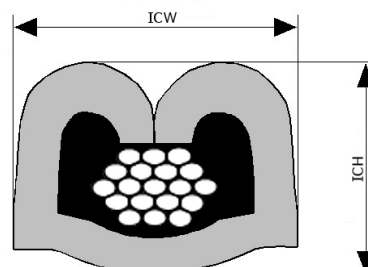

Crimp Information Sheet

DELPHI

Terminal Part Number: 15317331
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 5,00 | 6,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ [mm]: 4,40 - 5,70
Seal(s): 15324996 | 15324993

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 5,00 / 15324993		4,70	290	2,40	0,05	4,20	0,10	7,00	0,20	7,30	0,20
2011 6,00 / 15324996		5,05	325	2,85	0,05	4,20	0,10	6,40	0,20	6,40	0,20
2011 6,00 / 15324993		5,05	320	2,85	0,05	4,20	0,10	7,00	0,20	7,30	0,20

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

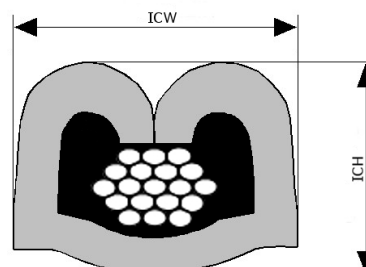

Crimp Information Sheet

DELPHI

Terminal Part Number: 15317331

Surface Plating: SN

Material Thickness [mm]: 0,40

Cross Section [mm²]: 6,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 3,80 - 4,30

Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 6,00 / 15324996		4,05	325	2,85	0,05	4,20	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

2017: FLR41X-B, FLRY-A



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PP, PVC, XLPE

Insul. Wall Designator: THIN

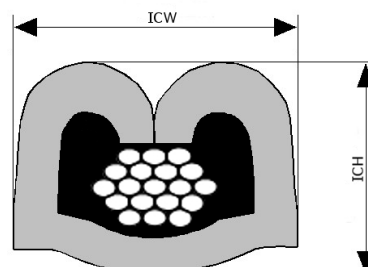

Terminal Part Number: 15317331
Surface Plating: SN
Material Thickness [mm]: 0,40
Cross Section [mm²]: 4,00 | 6,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,40 - 4,30
Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 4,00 / 15324996		3,55	275	2,40	0,05	4,10	0,10	6,50	0,20	6,40	0,20
8000 6,00 / 15324996		4,15	325	2,85	0,05	4,20	0,10	6,40	0,20	6,40	0,20

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

