

APN: 10863984
 Material: CUFE2P
 Surface: SN
 Material Thickness: 0.30 mm
 Cross Section [mm²]: 0.50 | 0.85

FRAMATOME 211CC2S1160P

Strip Length: 5.20 mm
 Cable Type: AVSS

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.50-1.90
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
AVSS 0.50		7x0.32	1.60	80	1.05	+ 0.03 - 0.03	1.90	+ 0.10 - 0.10	2.20	+ 0.10 - 0.10	2.60	+ 0.10 - 0.10
AVSS 0.85		19x0.24	1.80	140	1.15	+ 0.03 - 0.03	1.90	+ 0.10 - 0.10	2.30	+ 0.10 - 0.10	2.65	+ 0.10 - 0.10


Core:
 C-1.85-3.5-19
 APN 10713547

Isolation:
 IO-2.50-2.5-10
 APN 10713870

Anvil:

Two piece anvil:
 AC-1.85-3.75-B
 APN 10803466
 AI-2.50-3.2-0.4
 APN 10763838

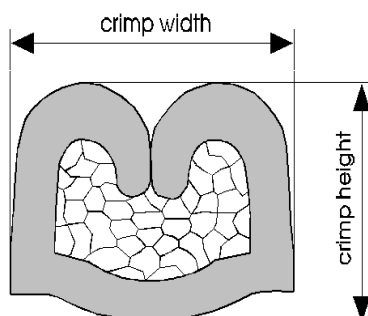


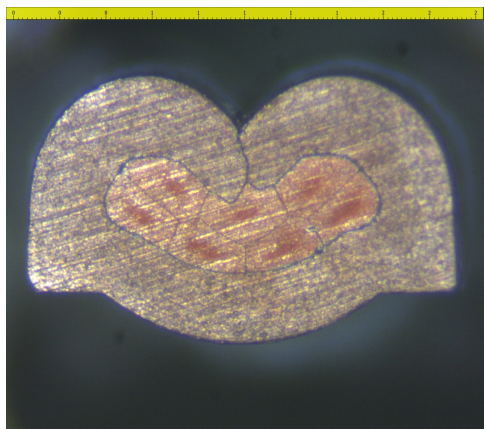

Cable:
AVSS $0.50\text{mm}^2 = 7 \times 0.32 \text{ mm}$

Crimp height:
1.05 mm

Crimp width:
1.90 mm

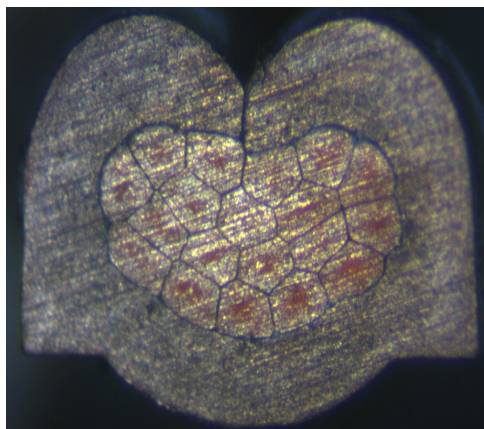

Cable:
AVSS $0.85\text{mm}^2 = 19 \times 0.24 \text{ mm}$

Crimp height:
1.15 mm

Crimp width:
1.90 mm