

APN: 10863985
 Material: CUFE2P
 Surface: SN
 Material Thickness: 0,30 mm
 Cross Section [mm²]: 1.00 | 1.50 | 2.00

FRAMATOME 211CC2S2160P

Strip Length: 4.40 mm
 Cable Type: FLRY-B

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.90-2.80
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 1.00		32x0.21	2.00	160	1.40	+ 0.05 - 0.05	2.35	+ 0.10 - 0.10	2.40	+ 0.10 - 0.10	3.50	+ 0.10 - 0.10
FLRY-B 1.50		30x0.26	2.30	200	1.50	+ 0.05 - 0.05	2.40	+ 0.10 - 0.10	2.50	+ 0.10 - 0.10	3.50	+ 0.10 - 0.10
FLRY-B 2.00		28x0.31	2.70	230	1.60	+ 0.05 - 0.05	2.40	+ 0.10 - 0.10	2.60	+ 0.10 - 0.10	3.60	+ 0.10 - 0.10

Core:
 C-2.30-3.5-15
 APN 10713062

Isolation:
 IO-3.50-2.5-12
 APN 10713871

Anvil:

Two piece anvil:
 AC-2.30-3.75-A
 APN 10791636
 AI-3.50-3.2-0.4
 APN 10791620

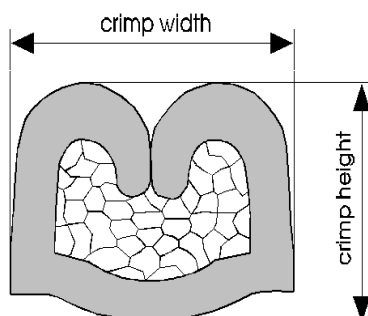




Cable:
FLRY-B 1.00mm² = 32x0.21 mm

Crimp height:
1.40 mm


Crimp width:
2.35 mm

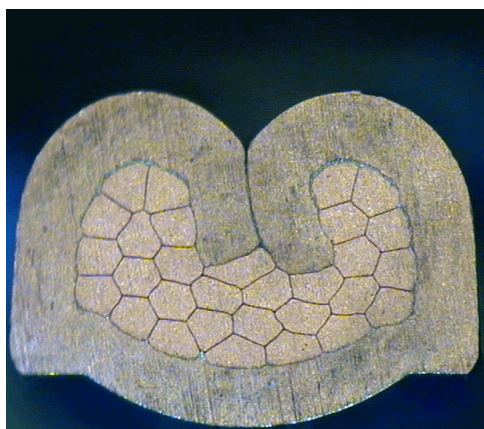

Cable:
FLRY-B 1.50mm² = 30x0.26 mm

Crimp height:
1.50 mm

Crimp width:
2.40 mm

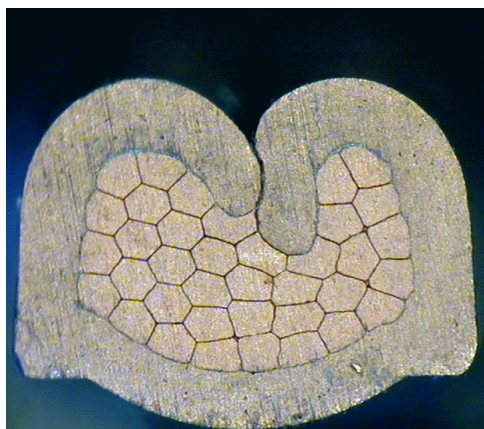

Cable:
FLRY-B 2.00mm² = 28x0.31 mm

Crimp height:
1.60 mm

Crimp width:
2.40 mm